



FloorPro Protect Dispersion Extra RM 782

Extra robust polymer coating for water-resistant floors. Excellent covering power, adhesion, slip resistance and abrasion resistance. Increased resistance to alcohol and disinfectant.



Properties


- keeps floor coverings looking like new
- highly economical, easy to apply, long cleaning intervals
- extra high covering power due to very high solids content; covers with just 1 to 2 coats
- high covering power, ideal for use on absorbent and old, worn out floors
- very short drying time
- extremely hard-wearing due to high abrasion and impact resistance as well as excellent protection against marks (e.g. heel marks)
- increased resistance to alcohol cleaning agents and disinfectants
- excellent adhesion to floor coverings
- for areas subject to heavy traffic and use (e.g. workshop or industry, hospitals, schools)
- slip-resistant according to DIN 51131 und DIN EN 13893 (depending on floor covering)
- easy to repolish

Areas:

Contract cleaning:	Floor care
Retirement homes, doctor's surgery:	Floor care
Industry:	Floor care
Municipal:	Floor care
Retail:	Floor care
Hotels, gastronomy, catering:	Floor care

Application

- manual
- Single-disc machines

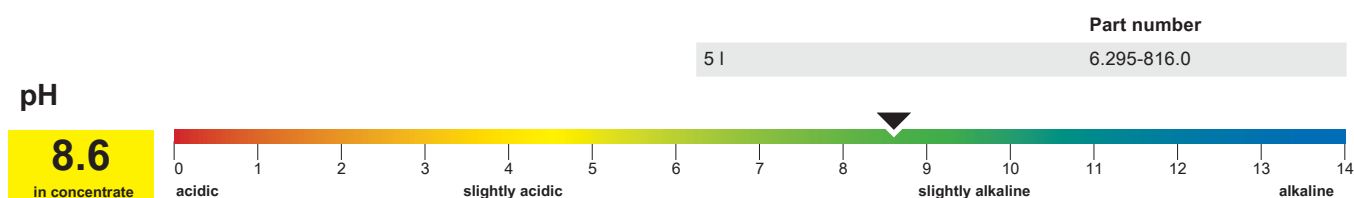

Application:

Coating

- The surface must be free from care film residues and dirt (pH 7-8.5). The surface must be dry.
- Tilting the container using a circular motion.
- Do not dilute or mix product with other products.
- Application quantity depending on absorbency and type of floor: 1st coat: about 25 - 45 ml/m², 2nd coat: about 20 - 30 ml/m². Yield depending on application quantity.
- Distribute product evenly, sparingly, quickly and overlapping (wet on wet) using a flat or articulated mop.
- Allow to dry completely between applications (about 30 minutes, depending on humidity and temperature).
- Repeat as necessary (1-2 coats recommended). Apply product cross-wise.
- Walkable after fully dry (about 3 hours).
- Suitable for normal traffic after about 24 hours.
- Fully hardens after about 14 days.

Directions for use:

- Do not apply to water-sensitive surfaces.
- Do not apply to wood or unsealed parquet flooring.
- Carry out an adhesion test on factory treated floors.
- Store away from frost.
- Only store in original container between 5 and 30°C.
- Do not put product residues back in the container.
- Close the container immediately after use.
- Clean the cleaning machine after use.

Warnings and safety recommendations according to EC Directives:

■

Further information:

- Material Safety Data Sheet (MSDS)
- Quick Start
- FIGR expertise (Forschungs- und Prüfinstitut für Facility Management GmbH)
- Expertise relating to anti-slip properties according to DIN 51131 and DIN EN 13893
- Expert report on slip resistance in accordance with DIN V 18032-2:2001-04

Dosage and yield:

Content:	Cleaning method:	Primary mixture:	Dosage:	Contamination:	Productivity:
1000 ml	Coating		undiluted		15-25 m ²

Please contact us for more information:

Kärcher UK Ltd

Kärcher House
Brookhill Way
Banbury
Oxon OX16 3ED