

VehiclePro Hot Wax RM 820 Classic



This liquid thermo-wax produces a weather-resistant coating which protects vehicles against corrosion.

NTA-free



Properties

- Effective thermo wax for use in vehicle and self-service washing installations
- Effectively protects for up to 1 month
- Effective with all water hardness levels
- Produces a high-gloss mirror finish
- VDA-compliant
- Tensides biodegradable in accordance with EEC 648/2004
- NTA free


Areas:

- Car dealership and garage:** Cars
- Haulage contractors, bus operators:** Commercial vehicle cleaning
- Self Service washing systems:** Cars, commercial vehicles, bicycles

Application

- High-pressure washers
- Car wash
- Self Service washing systems

	Part number
20 l	6.295-428.0
200 l	6.295-143.0
1000 l	6.295-144.0

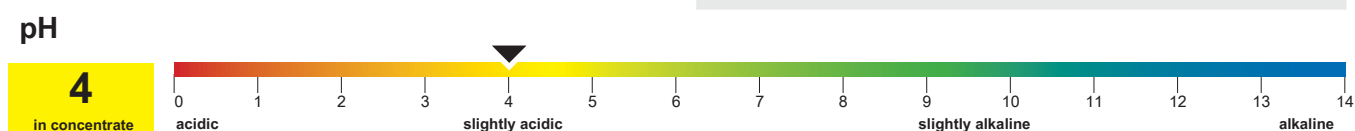

Application:**Car wash**

- Insert the product into the system.
- Set the dosage and temperature on the device
- Start washing programme.

High-pressure washers

- Apply primary mixture with demineralised water (osmosis water).
- Set the dosage and temperature on the device
- Wet object completely with product.

Self Service washing system

- Insert the product into the system.
- Set the dosage and temperature on the device
- Start washing programme.

Directions for use:

- Avoid over-dosage.
- Use only on washed, well rinsed surfaces.
- Apply primary mixture only with demineralised water.
- Store away from frost.

Warnings and safety recommendations according to EC Directives:

- EUH 210 Safety data sheet available on request.

Further information:

- VDA certification
- Material Safety Data Sheet (MSDS)

Dosage and yield:

Content:	Cleaning method:	Primary mixture:	Dosage:	Contamination:	Productivity:
1000 ml	High-pressure washers	1+9	1-2 %		120 PKW
1000 ml	Vehicle washing bay		0.1-0.2 %		120 PKW
1000 ml	Self Service washing systems		0.1-0.2 %		83 PKW

Please contact us for more information:

Kärcher UK Ltd

Kärcher House
Brookhill Way
Banbury
Oxon OX16 3ED