



HD 6/15 G Classic

Easy to service and mobile: the HD 6/15 G. With combustion engine, intelligent accessories concept and robust crankshaft pump. Ideal for construction and agriculture. Water volume: 600 l/h.



1 High level of autonomy

- Can be used independently of a power supply thanks to powerful gasoline engines.
- Using optional accessories, the machines can draw in water, for example from ponds and lakes.

2 Accessories concept

- Practical intake for hose and high-pressure lance directly on the machine.
- Storage compartment for nozzles, tools and other small parts.

3 Outstanding mobility

- Ergonomic push handle for easier transport.
- Large wheels with pneumatic tyres for uneven surfaces.

4 Easy to service and durable

- Robust crankshaft pump with proven Kärcher quality.
- Large water filter protects pump against damage.



HD 6/15 G Classic

- Tubular steel frame
- Robust crankshaft pump

Technical data

Order no.	1.187-003.0	
EAN code	4054278024646	
Working pressure	bar / MPa	150 / 15
Max. pressure	bar	200
Flow rate	l/h	600
Max. inlet temperature	°C	60
Motor type	G200FA / gasoline	
Motor rating	kW / hp	4.1 / 5.6
Weight	kg	41.9
Dimensions (L × W × H)	mm	799 × 637 × 1097

Equipment

Spray gun	Easy Press trigger gun	
High-pressure hose	m	10
Power nozzle	■	
Anti-twist system (AVS)	-	
Electro start	-	
Quick Connect Kärcher standard nozzles	-	
Servo Control	-	
Vario Power spray lance	-	
Motor	Petrol	

■ Included in the scope of supply.

HD 6/15 G CLASSIC

1.187-003.0



		Order no.	Max. working pressure	Nozzle size			Price	Description	
Triple nozzles									
Triple nozzle 040	1	4.767-150.0	300 bar	40				Triple nozzle with manual nozzle changeover. Convenient spray adjustment. For machines with an injector, the low-pressure flat stream is useful for cleaning agent suction and application. Connection M 18 x 1.5.	<input type="checkbox"/>

☐ Available accessories.

HD 6/15 G CLASSIC

1.187-003.0

KÄRCHER



		Order no.	Flow rate				Price	Description	
Inno Foam Kit									
Inno Foam Set with detergent injector	1	2.640-151.0						High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or disinfection.	<input type="checkbox"/>
Nozzle kits for Inno/Easy Foam Set									
Nozzle kit 055 for Inno / Easy Set 500-600 l/h	2	2.640-870.0	500-600 l/h					Optimal adaptation to different machine outputs for economic use.	<input type="checkbox"/>
Nozzle kit 060 for Inno / Easy Set 600-700 l/h	3	2.640-687.0	600-700 l/h						<input type="checkbox"/>
Foam nozzle mounting kit									
Foam nozzle attachment kit	4	2.637-926.0						Foaming agent kit. The foam nozzle is ideal for use in sanitary areas and the food industry and wherever long application times are necessary.	<input type="checkbox"/>

☐ Available accessories.

HD 6/15 G CLASSIC

1.187-003.0

KÄRCHER




		Order no.						Price	Description	
Cleaning agent injector										
Cleaning agent injector for high pressure (without nozzle)	1	3.637-170.0							Cleaning agent dosage at high pressure 3 - 5 %	<input type="checkbox"/>
Machine-specific nozzle kit with order no. 4.637-033.0										
Nozzle kit HD 500-700 l/h	2	4.769-005.0							For HD 500 - 700 l/h. Consists of nozzle insert + HP power nozzle + union	<input type="checkbox"/>
	3	4.769-045.0								<input type="checkbox"/>
EASY!Lock adapter										
Adapter 1 M22AG-TR22AG	4	4.111-029.0							Adapter 1 to connect the old hose with the new hose	<input type="checkbox"/>
Adapter 2 M22IG-TR22AG	5	4.111-030.0							Adapter 2 to connect the old device with the new hose and the old gun with the new hose	<input type="checkbox"/>
Adapter 3 M22IG-TR22AG	6	4.111-031.0							Adapter 3 to connect the old gun with the new spray lance and new servo regulator	<input type="checkbox"/>
Adapter 4 TR22IG-D11	7	4.111-032.0							Adapter 4 to connect the new gun with the old swivel hose	<input type="checkbox"/>
Adapter 5 TR22IG-M22AG	8	4.111-033.0							Adapter 5 to connect the new gun with the old spray lance and new servo regulator with the old spray lance	<input type="checkbox"/>
Adapter 6 TR22IG-M22AG	9	4.111-034.0							Adapter 6 to connect the new device with the old hose and the old hose with the new gun	<input type="checkbox"/>
Adapter 7 M18IG-TR20AG	10	4.111-035.0							Adapter 7 to connect the old spray lance with the new nozzle	<input type="checkbox"/>
Adapter 8 TR20IG-M18AG	11	4.111-036.0							Adapter 8 to connect the new spray lance with the old nozzle	<input type="checkbox"/>

☐ Available accessories.

HD 6/15 G CLASSIC

1.187-003.0

KÄRCHER

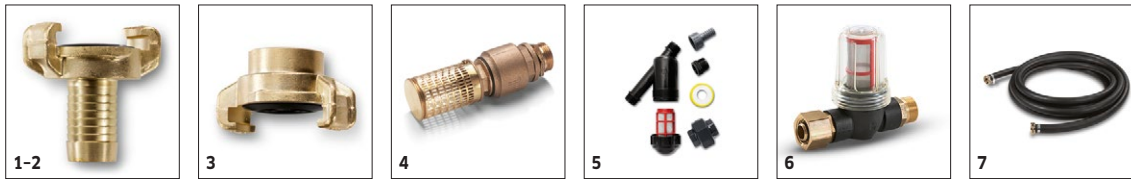

		Order no.			Price	Description	
Geka coupling							
Geka connector with hose barb, R 1/2"	1	6.388-461.0				with hose liner	<input type="checkbox"/>
Geka connector with hose barb, R 3/4"	2	6.388-455.0				with hose liner	<input type="checkbox"/>
Geka connector with internal thread, R 1"	3	6.388-458.0				with female thread	<input type="checkbox"/>
Suction filter							
Suction filter with check valve	4	4.730-012.0				Brass suction filter suitable for ponds, storage tanks, etc. With check valve.	<input type="checkbox"/>
Water fine filter							
Water fine filter, with adapter	5	4.730-102.0				Fine-mesh water filter, 125 µm, max. temperature 50°C. Protects the	<input type="checkbox"/>
Water fine filter, 100 µm, R 1"	6	2.638-270.0				Fine-mesh water filter, 100 µm, max. temperature 60°C. Connects to	<input type="checkbox"/>
Water supply hose							
Water supply hose	7	4.440-270.0				NW 19 R1" / R1", up to 85 °C	<input type="checkbox"/>

☐ Available accessories.