



HD 5/17 C

Convenient, mobile, versatile: the HD 5/17 C cold water high-pressure cleaner for vertical and horizontal operation. With accessory storage, brass cylinder head and automatic pressure relief.



1 Mobility

- The integrated carrying handle on the front of the machine enables easy loading and convenient transport.
- Push handle can be retracted at the push of a button.

2 Flexibility

- Vertical and horizontal operation possible.
- The wheels are not on during horizontal operation. As such, the machine offers maximum stability.

3 Accessory storage

- Screw connections (M 18 × 1.5) for storing surface cleaner directly on the machine.
- Practical nozzle compartments for triple nozzle and rotary nozzle.

4 Quality

- The automatic pressure relief protects the components and extends the service life of the machine.
- High-quality brass cylinder head.



HD 5/17 C

- Automatic pressure relief
- For horizontal and vertical operation
- Save time and effort: EASY!Force high-pressure gun and EASY!Lock quick-release couplings.

Technical data

Order no.		1.520-150.0
EAN code		4039784607477
Current type	Ph / V / Hz	1 / 230 / 50
Flow rate	l/h	480
Working pressure	bar / MPa	170 / 17
Max. pressure	bar / MPa	200 / 20
Max. inlet temperature	°C	up to 60
Connection load	kW	3
Weight	kg	25.2
Dimensions (L × W × H)	mm	380 × 360 × 930

Equipment

Spray gun		Easy Press trigger gun
Spray gun with soft grip		■
High-pressure hose	m	10 / DN 6, 250 bar
Spray lance	mm	850
Triple nozzle (0°/25°/40°)		Manual
ANTI!Twist		-
Pressure cut-off		■
Servo Control		-

■ Included in the scope of supply.

HD 5/17 C 1.520-150.0

KÄRCHER


		Order no.	ID	Max. working pressure	Length	Price	Description	
Standard with unions on both sides								
High-pressure hose, 10 m, ID 8, 315 bar, extension	1	6.391-342.0	ID 8	315 bar	10 m		To extend the operating radius with the high-pressure cleaner. Connection on both sides M22 x 1.5.	▲
High-pressure hose, 15 m, ID 8, 315 bar, including rotary coupling	2	6.390-010.0	ID 8	315 bar	15 m		With screw connections on both sides, M 22 x 1.5 with bend protection.	▲
High-pressure hose, 20 m, ID 8, 315 bar, extension piece	3	6.390-031.0	ID 8	315 bar	20 m		Screw connections at both ends, M 22 x 1.5, with kink protection.	▲
High-pressure hose, 30 m, ID 8, incl. rotary coupling	4	6.390-293.0	ID 8	315 bar	30 m		To extend the operating radius with the high-pressure cleaner. Connection on both sides M22 x 1.5.	▲
Longlife 400 with unions on both sides								
High pressure hose ID 6, 10 m, including rotary coupling	5	6.391-883.0	ID 6	400 bar	10 m		With rotary coupling, 2 x M 22 x 1.5	▲
High-pressure hose Longlife 400, 10 m, ID 8, extension	6	6.391-354.0	ID 8	400 bar	10 m		To extend the operating radius with the high-pressure cleaner. Connection on both sides M22 x 1.5.	▲
High-pressure hose Longlife 400, 15 m, ID 8, including rotary coupling	7	6.389-709.0	ID 8	400 bar	15 m		With rotary coupling, 2 x M 22 x 1.5	▲
High-pressure hose Longlife 400, 30 m, ID 8, including rotary coupling	8	6.390-294.0	ID 8	400 bar	30 m			▲
High-pressure hose 1.5 m, ID 8, including connectors	9	6.390-178.0	ID 8	400 bar	1.5 m		1.5 m high-pressure hose (DN 8, M 22 x 1.5) with kink protection and connectors at both ends. For connecting to hose reels with appropriate connector (M 22 x 1.5).	□
Food industry version with unions on both sides								
High-pressure hose, 10 m, DN 8, suitable for the food industry, extension piece	10	6.389-479.0	ID 8	250 bar	10 m		10 m high-pressure hose (DN 8) with patented (rotating) AVS trigger gun connector. Non-discolouring outer layer for use in the food industry. M 22 x 1.5 with anti-kink sleeve.	▲
High-pressure hose, 20 m, ID 8, suitable for food industry, extension piece	11	6.389-581.0	ID 8	250 bar	20 m		20 m high-pressure hose (DN 8) with swivel coupling. Non-discolouring outer layer for use in the food industry. Connectors at both ends, M 22 x 1.5, with kink protection. NW 8/155°C/250 bar.	▲
Longlife food design with screw connections at both ends								
High pressure hose food ID 8, 10 m	12	6.391-864.0	ID 8	400 bar	10 m		Longlife HP hose for use in the food industry. Außen-decke## animal-grease-resistant, non-colour-bleeding material. With rotary coupling, 2 x M 22 x 1.5	▲
High-pressure hose food industry 400 bar, 20 m, ID 8, including rotary coupling	13	6.391-887.0	ID 8	400 bar	20 m			▲
Standard								
High-pressure hose, 10 m, ID 6, AVS trigger gun connector	14	6.391-238.0	ID 6	250 bar	10 m		10 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 6/155°C/250 bar.	■
High-pressure hose, 15 m, ID 6, AVS gun connection	15	6.391-394.0	ID 6	250 bar	15 m		With patented AVS trigger gun connection (rotatable) and hand screw connection, M 22 x 1.5 with kink protection.	□
High-pressure hose, 10 m, ID 6, 300 bar, AVS trigger gun connection	16	6.391-875.0	ID 6	300 bar	10 m		With patented AVS connection in the trigger gun (pivot-mounted) and hand screw union. M 22 x 1.5 with anti-kink protection. NW 6/155°C/300 bar	□
High-pressure hose, 10 m, ID 8, AVS trigger gun connector	17	6.390-025.0	ID 8	315 bar	10 m		10 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	□
High-pressure hose, 15 m, ID 8, AVS trigger gun connector	18	6.390-185.0	ID 8	315 bar	15 m		15 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	□

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.

HD 5/17 C 1.520-150.0

KÄRCHER



		Order no.	ID	Max. working pressure	Length	Price	Description	
High-pressure hose, 20 m, ID 8, AVS trigger gun connector	19	6.390-171.0	ID 8	315 bar	20 m		20 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	☐
Longlife 400								
Longlife 400 high-pressure hose, 10 m, DN 6, M 22 x 1.5	20	6.391-882.0	ID 6	400 bar	10 m		With patented AVS connection in the trigger gun (pivot-mounted).	☐
High-pressure hose Longlife 400, 10 m, ID 8, AVS trigger gun connection	21	6.391-351.0	ID 8	400 bar	10 m		With patented AVS connection in the trigger gun (rotatable) and hand screw connection, M 22 x 1.5 with kink protection. With double steel reinforcement.	☐
High-pressure hose Longlife 400, 20 m, DN 8, AVS trigger gun connector	22	6.390-208.0	ID 8	400 bar	20 m		20 m high-pressure hose Longlife 400 (DN 8) with patented (rotating) AVS trigger gun connector and manual coupling. Two layer high-strength steel wire reinforced.	☐
Food industry version								
High-pressure hose, 10 m, DN 8, AVS trigger gun connection, food, grey	23	6.390-704.0	ID 8	250 bar	10 m		Food industry version, AVS connection in the trigger gun. grey NW 8/155 °C/250 bar	☐
High-pressure hose, 20 m, ID 8, AVS trigger gun connector, suitable for food industry, grey	24	6.390-705.0	ID 8	250 bar	20 m		20 m high-pressure hose (DN 8) with patented (rotating) AVS trigger gun connector. Non-discolouring outer layer for use in the food industry. NW 8/155°C/250 bar.	☐
Longlife food design								
High-pressure hose Longlife 400, 10 m, ID 8, AVS trigger gun connection	25	6.391-885.0	ID 8	400 bar	10 m		Longlife HP hose for use in the food industry. Außen-decke## animal-grease-resistant, non-colour-bleeding material. With patented AVS connection in the pistol (pivot mounted)	☐
High-pressure hose Longlife 400, 20 m, ID 8, AVS trigger gun connection	26	6.391-886.0	ID 8	400 bar	20 m			☐
Special hoses								
High-pressure hose, 1.5 m, ID 8, incl. connection parts, curved outflow	27	6.388-886.0	ID 8	400 bar	1.5 m		Connection hose in longlife quality with 2x M22 x 1.5, with angled connection on one side.	☐

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.

HD 5/17 C 1.520-150.0

KÄRCHER




		Order no.	Flow rate				Price	Description	
Easy Press high-pressure trigger gun with holding force reduction (Kärcher patent)									
Easy Press HP trigger gun with soft grip	1	4.775-463.0						Easy press high-pressure trigger gun with softgrip. For high-pressure hoses DN 6 and DN 8 with 11 mm swivel diameter.	■
Trigger guns									
High-end HP trigger gun	2	4.775-823.0						High-end spray guns with optimised flow. Small pressure losses also with water volumes up to 2500 l/h. Robustness and durability for professional use. Food-safe and saltwater-resistant materials offer the best conditions for use in the food sector and in industry. Connector for HP hoses M 22 x 1.5.	□
Quick connect									
Quick coupling	3	6.401-458.0						For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit, suitable for trigger gun/spray lance interface. With M 22 x 1.5 internal thread.	□
Male coupling	4	6.401-459.0						Hardened stainless steel male coupling for quick coupling 6.401-458. With M 22 x 1.5 external thread.	□

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.

HD 5/17 C

1.520-150.0

KÄRCHER

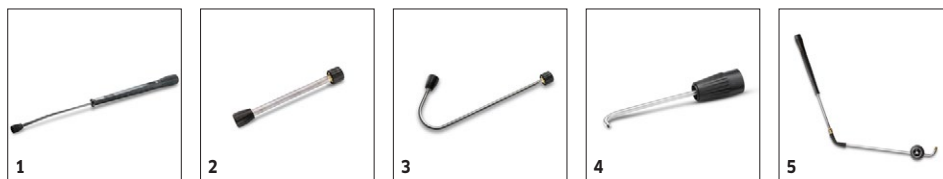

		Order no.	Max. working pressure	Length			Price	Description	
Rotating spray lances									
Spray lance, 840 mm, rotatable	1	4.760-663.0	300 bar	840 mm				850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	■
Spray lance									
250 mm lance, non-rotatable	2	4.760-667.0		250 mm				250 mm stainless steel lance. With manual coupling. Non-rotatable.	□
Angular spray lance									
Spray lance for toilets and rain gutters	3	4.760-073.0						Stainless steel lance WC and gutter with nozzle insert. Specially shaped for effective and hygienic cleaning of gutters and toilets.	□
Gutter cleaner									
Gutter cleaning lance	4	2.642-305.0						The lance is suited for cleaning of gutter systems. Because of the shape of the lance and the special nozzle the gutter can be cleaned without removing the cover plates.	□
Undercarriage spray lance									
Underbody lance	5	4.760-245.0		700 mm				Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle.	□

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.

HD 5/17 C 1.520-150.0



		Order no.	Max. working pressure	Nozzle size			Price	Description	
Triple nozzles									
Triple nozzle 028	1	4.767-144.0	300 bar	28				Triple nozzle with manual nozzle changeover. Convenient spray adjustment. For machines with an injector, the low-pressure flat stream is useful for cleaning agent suction and application. Connection M 18 x 1.5.	■
Dirt Blaster, small									
Dirt blaster - more Performance	2	4.767-229.0	180 bar	30				Less power loss, higher spray quality: the new performance dirt blaster with nozzle size 030 achieves up to 50% higher cleaning and area performance than its predecessor.	□

■ Included in the scope of supply.
 □ Available accessories.
 ▲ Extension hose.

HD 5/17 C
1.520-150.0



		Order no.	Nozzle size				Price	Description	
Power nozzle spray angle 25°									
25° power nozzle for cleaning agent suction	1	2.884-521.0	250					Brass power nozzle for low pressure operation and cleaning agent suction.	☐

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.

HD 5/17 C 1.520-150.0

KÄRCHER



		Order no.	Max. working pressure	Nozzle size	Diameter	Price	Description	
Pipe cleaning hose, ID 6								
Pipe cleaning hose, DN 6, 20 m, max. 120 bar	1	6.390-028.0	120 bar				The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐
Pipe cleaning hose, DN 6, 30 m, max. 120 bar	2	6.390-029.0	120 bar				30 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle).	☐
Pipe cleaning hose, DN 6, 20 m, max. 250 bar	3	6.390-030.0	250 bar				The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐
Pipe cleaning nozzle								
Pipe cleaning dirt blaster D21/040	4	4.765-001.0		40	21 mm		The forward-tilted rotating pencil jet removes the most stubborn dirt. The three backwards-tilted jets ensure the necessary forward movement, as well as convenient handling.	☐
Pipe cleaning dirt blaster D30/040	5	4.765-004.0		40	30 mm			☐

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.

HD 5/17 C 1.520-150.0

KÄRCHER



		Order no.	Flow rate	Nozzle size	Diameter	Price	Description	
Hard surface cleaner FR 30								
Surface Cleaner FR 30	1	2.642-997.0			300 mm		Up to 10 times greater area coverage compared with the conventional high pressure jet. Plastic casing for optimal manoeuvrability, double ceramic bearing for long working times, flexible connection joint for ergonomic handling and integrated parking position. Machine specific nozzle kit must be ordered separately.	☐
FR 30 Me surface cleaner								
Hard surface cleaner FR 30 Me	2	2.640-355.0			300 mm		Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry.	☐
Machine-specific nozzle kits for FR								
Nozzle kit for surface cleaners	3	2.640-482.0	450 – 500 l/h				Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (450 to 500 l/h).	☐

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.

HD 5/17 C

1.520-150.0



		Order no.	Flow rate				Price	Description	
Cup foam lance									
Cup foam lance Advanced 042	1	6.394-969.0						Short, handy foam lance with adjustable spray angle with 1 litre detergent tank. Ideal for cleaning cars due to its compact design.	☐
Inno Foam Kit									
Inno Foam Set with detergent injector	2	2.640-151.0						High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or disinfection.	☐
Easy Foam Set									
Easy Foam Set with RM injector	3	2.640-691.0						HP foam system for use with. HD/HDS units for cleaning and disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine specific nozzle kit has to be ordered separately.	☐
Nozzle kits for Inno/Easy Foam Set									
Nozzle kit 055 for Inno / Easy Set 500-600 l/h	4	2.640-870.0	500 - 600 l/h					Optimal adaptation to different machine outputs for economic use.	☐
Foam nozzle mounting kit									
Foam nozzle attachment kit	5	2.637-926.0						Foaming agent kit. The foam nozzle is ideal for use in sanitary areas and the food industry and wherever long application times are necessary.	☐

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.

HD 5/17 C 1.520-150.0

KÄRCHER


		Order no.					Price	Description	
Cleaning agent injector									
Cleaning agent injector for high pressure (without nozzle)	1	3.637-170.0						Cleaning agent dosage at high pressure 3 - 5 %	☐
Machine-specific nozzle kit with order no. 4.637-033.0									
Nozzle kit HD 500-700 l/h	2	4.769-005.0						For HD 500 - 700 l/h. Consists of nozzle insert + HP power nozzle + union	☐
	3	4.769-045.0							☐
Coupling									
Coupler -2 x M22 x 1,5	4	4.403-002.0						For overriding the dismantled heating coil for cleaning alternative: 4.111-029.0 adapter 1 - hose old / hose new	☐
Connector									
Nozzle screws / screw socket	5	4.402-022.0						Nozzle connector/screw connector for connecting high-pressure nozzles and accessories to the high-pressure trigger gun (with nozzle connector). Connectors: 1x M 22 x 1.5 and 1x M 18 x 1.5.	☐
Adapters									
Sealing cone complete	6	4.424-004.0						In order to install high-pressure hose with male coupling on thread with M22 x 1.5 Alternative: 4.111-032.0 Adapter 4 - Device new / Hose old Swivel	☐
EASY!Lock adapter									
Adapter 1 M22AG-TR22AG	7	4.111-029.0						Adapter 1 to connect the old hose with the new hose	☐
Adapter 2 M22IG-TR22AG	8	4.111-030.0						Adapter 2 to connect the old device with the new hose and the old gun with the new hose	☐
Adapter 3 M22IG-TR22AG	9	4.111-031.0						Adapter 3 to connect the old gun with the new spray lance and new servo regulator	☐
Adapter 4 TR22IG-D11	10	4.111-032.0						Adapter 4 to connect the new gun with the old swivel hose	☐
Adapter 5 TR22IG-M22AG	11	4.111-033.0						Adapter 5 to connect the new gun with the old spray lance and new servo regulator with the old spray lance	☐
Adapter 6 TR22IG-M22AG	12	4.111-034.0						Adapter 6 to connect the new device with the old hose and the old hose with the new gun	☐
Adapter 7 M18IG-TR20AG	13	4.111-035.0						Adapter 7 to connect the old spray lance with the new nozzle	☐
Adapter 8 TR20IG-M18AG	14	4.111-036.0						Adapter 8 to connect the new spray lance with the old nozzle	☐

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.

HD 5/17 C 1.520-150.0



		Order no.	Length				Price	Description	
Automatic, self-winding hose reels for wall mounting									
Powder-coated swivel holder	1	2.639-931.0						Swivel holder for automatic hose reel wall mounting. For maximum action radius and flexibility of high-pressure hose. Rotatable 120°. Galvanised steel.	☐

■ Included in the scope of supply.
 ☐ Available accessories.
 ▲ Extension hose.

HD 5/17 C

1.520-150.0

KÄRCHER



		Order no.	Nozzle size				Price	Description	
Wet blasting attachment (without nozzle)									
Wet blasting attachment with flow control (without nozzles)	1	4.762-010.0						Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet.	☐
Wet blasting attachment without flow control (nozzles not included)	2	4.762-022.0						Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet. Without flow control.	☐
Nozzle kits for wet jet unit									
Nozzle kit for wet jet unit 035	3	2.638-526.0	30					Nozzle kit with wet blasting nozzle and nozzle insert (type specific). For optimal Kärcher wet blasting attachment performance. Only in combination with wet blasting attachment 4.762-010/-022.	☐
Boron carbide nozzle									
Boron carbide nozzle, for machines up to 1,000 l/h	4	6.415-084.0	6 mm					In addition to nozzle packs. Very wear-resistant nozzle with boron carbide chuck for continuous-duty operation.	☐

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.

HD 5/17 C 1.520-150.0

KÄRCHER



		Order no.			Price	De- scrip- tion	
Geka coupling							
Geka connector with hose barb, R 1/2"	1	6.388-461.0				with hose liner	☐
Geka connector with hose barb, R 3/4"	2	6.388-455.0				with hose liner	☐
Geka connector with inner thread, R 3/4"	3	6.388-473.0				with female thread	☐
Suction filter							
Suction filter with check valve	4	4.730-012.0				Brass suction filter suitable for ponds, storage tanks, etc. With check valve.	☐
Water fine filter							
Water fine filter, with adapter	5	4.730-102.0				Fine- mesh water filter, 125 µm, max. temper- ature 50°C. Protects the	☐
Water supply hose							
Water supply hose	6	4.440-038.0				NW 13 R1" / R 3/4", up to 30 °C	☐
	7	4.440-207.0				NW 19 R1" / R 3/4", up to 85 °C, for pick-up	☐

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.

HD 5/17 C 1.520-150.0



		Order no.			Price	De- scrip- tion	
Backflow check valve							
Backflow preventer	8	2.641-374.0				To pre-vent deter-gent getting into the drinking water cycle in case of inlet at	☐
Other HP Accessories							
Starting current limiter	9	2.637-495.0				Reduces starting current in sin-gle-phase supply and protects line fuse.	☐

■ Included in the scope of supply.
 ☐ Available accessories.
 ▲ Extension hose.

HD 5/17 C 1.520-150.0



		Order no.	Flow rate				Price	Description	
Push-on washing brush									
Push-on wash brush	1	4.762-497.0						The wash brush is fitted directly onto the devices' new dual and triple nozzles using clamping.	☐
Rotating washing brush									
Rotating wash brush for < 800 l/h machines, nylon bristles	2	4.762-561.0	500 - 800 l/h					The rotating wash brush gently removes fine dust and traffic film from all surfaces. Temperature resistant up to 60°C. (M 18 x 1.5, replaceable brush insert).	☐
Rotating wash brush for < 800 l/h machines, natural bristles	3	4.762-560.0	500 - 800 l/h					Driven by water stream. Gently removes fine dust and traffic film from any surface. Temperature resistant up to 60°C, M 18 x 1.5 (replaceable brush insert).	☐

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.