


HD 9/18-4 Cage *KAP

The HD 9/18-4 Cage Classic is sure to impress with its powerful three phase four-pole motor, crankshaft pump, brass cylinder head and ceramic pistons.



1 Durable and reliable

- 4-pole electric motor.
- Brass cylinder head and ceramic piston.

2 Robust and secure

- Robust tubular frame construction ensures optimum protection of the machine.
- Built-in handles for transport.

3 Service-friendly

- Excellent access to all relevant components.
- Large water inlet filter for easy servicing.

4 Versatile

- The machine can be attached to the floor or the wall.



HD 9/18-4 Cage *KAP

Technical data

Order No.	1.367-321.0	
EAN code	4054278336121	
Type of current	Ph / V / Hz	3 / 400 / 50
Flow rate	l/h	450-900
Operating pressure	bar / MPa	70-180 / 7-18
Max. pressure	bar	250
Max. feed temperature	°C	60
Power rating	kW	5.9
Weight	kg	55.5
Dimensions (L x W x H)	mm	625 × 500 × 360

Equipment

Trigger gun		Standard
High-pressure hose	m	10 / ID 8, 315 bar
Spray lance	mm	600
Power nozzle		■
ANTI!Twist		-
Pressure cut-off		■
High-pressure hose	m	10
Servo Control		-
Crankshaft pump with ceramic pistons		■

■ Included in delivery.

HD 9/18-4 CAGE *KAP 1.367-321.0



	Order No.	ID	Max. working pressure	Length	Price	Description	
Standard with unions on both sides							
High-pressure hose, 30 m DN 8, including rotary coupling	1	6.390-293.0	ID 8	315 bar	30 m	With rotary coupling, 2 x M 22 x 1.5	▲
High-pressure hose, 15 m DN 8, 315 bar, including rotary coupling	2	6.390-010.0	ID 8	315 bar	15 m		▲
High-pressure hose, 20 m DN 8, 315 bar, extension	3	6.390-031.0	ID 8	315 bar	20 m	With M 22x1.5 union at both ends and anti-kink protection ID 8/155°C/315 bar	▲
High-pressure hose packaged	4	6.391-342.0	ID 8	315 bar	10 m		□
Longlife 400 with unions on both sides							
High-pressure hose Longlife 400, 15 m, ID 8, including rotary coupling	5	6.389-709.0	ID 8	400 bar	15 m	With rotary coupling, 2 x M 22 x 1.5	▲
High-pressure hose Longlife 400, 20 m, ID 8, extension	6	6.390-027.0	ID 8	400 bar	20 m	with rotary coupling, 2 x M 22 x 1.5	▲
High-pressure hose Longlife 400, 30 m ID 8, including rotary coupling	7	6.390-294.0	ID 8	400 bar	30 m	With rotary coupling, 2 x M 22 x 1.5	▲
	8	6.392-282.0	ID 8	400 bar	1.5 m		□
High-pressure hose 1.5 m, ID 8, including connectors	9	6.390-178.0	ID 8	400 bar	1.5 m	1.5 m high-pressure hose (DN 8, M 22 x 1.5) with kink protection and connectors at both ends. For connecting to hose reels with appropriate connector (M 22 x 1.5).	□
High-pressure hose Longlife 400, 10 m, ID 8, including rotary coupling	10	6.388-083.0	ID 8	400 bar	10 m	10 m high-pressure hose Longlife 400 (DN 8) with rotary coupling, two layer high-strength steel wire reinforced. Connectors at both ends. M 22 x 1.5, with kink protection.	□

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 9/18-4 CAGE *KAP 1.367-321.0



		Order No.	Flow rate				Price	Description	
Trigger guns									
Pistol for replacement	1	9.751-139.0							■
EASY!Force Advanced	2	4.118-005.0						Effortless, not energy-sapping: the EASY!Force high-pressure gun uses the recoil force of the high-pressure jet to reduce the holding force for the operator to zero.	□
Quick connect									
Quick coupling	3	6.401-458.0						For quick change of different spray lances and accessories. Optimum adaption to Kärcher accessories, especially for connection between trigger gun and spray lance. With M22 x 1,5 female.	□
Plug nipple	4	6.401-459.0						Hardened stainless steel nipple for quick coupling 6.401-458. With M22 x 1,5 male.	□

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 9/18-4 CAGE *KAP 1.367-321.0



		Order No.	Nozzle size				Price	Description	
Power nozzle spray angle 25°									
Power nozzle spray angle 25°	1	2.883-399.0	50					Fan jet nozzle with 25° spray angle, suitable for large areas and removing stubborn dirt and stains.	■
Power nozzle spray angle 15°									
Power nozzle spray angle 15°	2	2.883-390.0	55					Fan jet nozzle with 15° spray angle suitable for stubborn dirt.	□
Power nozzle spray angle 40°									
Power nozzle spray angle 40°	3	2.884-524.0	50					Power nozzle with a 40° spray angle and fan jet, suitable for large areas and sensitive surfaces.	□
HP nozzle spray angle 0°									
High-pressure nozzle spray angle 0°	4	2.884-535.0	50					High-pressure nozzle with powerful jet for extremely stubborn dirt.	□

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 9/18-4 CAGE *KAP 1.367-321.0

KÄRCHER



		Order No.	Max. working pressure	Length		Price	Description	
Spray lance								
Lance 250 mm, non-rotatable	1	4.760-667.0		250 mm			250 mm stainless steel lance. With manual coupling. Non-rotatable.	<input type="checkbox"/>
550 mm lance, non-rotatable	2	4.760-665.0		550 mm			550 mm stainless steel lance. With manual coupling. Non-rotatable.	<input type="checkbox"/>
Anti-vibration lance	3	6.415-951.0	250 bar	950 mm			The spring-loaded 360° loop handle significantly reduces the vibrations on the spray lance, reducing the physical burden on the user, e.g. when working with the dirt blaster.	<input type="checkbox"/>
Jet pipe for replacement 600mm	4	9.751-140.0						<input type="checkbox"/>
Rotating spray lances								
Rotatable lance, 600 mm, ergonomic	5	4.760-664.0	300 bar	600 mm			600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	<input type="checkbox"/>
Lance 850 mm, rotatable, ergonomic	6	4.760-663.0	300 bar	840 mm			850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	<input type="checkbox"/>
1050 mm lance, rotatable, ergonomic	7	4.760-660.0	300 bar	1050 mm			1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	<input type="checkbox"/>
Lance 1550 mm, rotatable, ergonomic	8	4.760-661.0	300 bar	1550 mm			1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	<input type="checkbox"/>
Lance 2050 mm, rotatable, ergonomic	9	4.760-662.0	300 bar	2050 mm			2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	<input type="checkbox"/>
Angular spray lance								
WC and gutter lance	10	4.760-073.0					Stainless steel lance WC and gutter with nozzle insert. Specially shaped for effective and hygienic cleaning of gutters and toilets.	<input type="checkbox"/>
Flexible spray lance								
Flexible lance 1050 mm	11	6.394-654.0	210 bar	1050 mm			1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters.	<input type="checkbox"/>
Articulated joint M18x1,5	12	4.481-039.0	300 bar					<input type="checkbox"/>
Telescopic spray lance								
Telescopic jet pipe	13	6.394-690.0	225 bar	5400 mm				<input type="checkbox"/>
Restraint belt for telescopic jet pipe	14	6.373-987.0					Convenient strap for relief when working with the telescopic spray lance (6.394-690). The burden is optimally distributed on the body and longer periods of use are possible.	<input type="checkbox"/>
Gutter cleaner								
Gutter cleaning lance	15	2.642-305.0					The lance is suited for cleaning of gutter systems. Because of the shape of the lance and the special nozzle the gutter can be cleaned without removing the cover plates.	<input type="checkbox"/>
Undercarriage spray lance								
Underbody lance	16	4.760-245.0		700 mm			Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 9/18-4 CAGE *KAP 1.367-321.0



		Order No.	Max. working pressure	Nozzle size		Price	Description	
Dirt Blaster, small								
	1	4.767-233.0	180 bar	50				<input type="checkbox"/>
Dirt blaster, large								
Dirt blaster - without changeover function	2	4.763-253.0	300 bar	50			The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C.	<input type="checkbox"/>
Triple nozzles								
Triple nozzle 053	3	4.767-155.0	300 bar	53			Triple nozzle with manual nozzle changeover. Convenient spray adjustment. For high-pressure cleaners with injector; low-pressure fan jet for detergent removal and application. Connector M 18x1.5.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 9/18-4 CAGE *KAP 1.367-321.0



		Order No.	Max. working pressure	Nozzle size	Diameter		Price	Description	
Pipe cleaning hose, ID 6									
Hose assembly TR pipe cleaning DN6 max.2	1	6.110-046.0	250 bar						<input type="checkbox"/>
Pipe cleaning hose	2	6.390-028.0	120 bar					20 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle).	<input type="checkbox"/>
Pipe cleaning hose, ID 6, 20 m, max. 250 bar	3	6.110-008.0	250 bar					The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	<input type="checkbox"/>
Pipe cleaning hose, DN 6, 30 m	4	6.390-029.0	120 bar					30 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle).	<input type="checkbox"/>
Hose assembly TR pipe cleaning DN6 max.2	5	6.110-047.0	250 bar						<input type="checkbox"/>
Pipe cleaning hose, DN 6, 20 m, 220 bar	6	6.390-030.0	250 bar					20 m flexible high-pressure hose (DN 6) for cleaning pipes up to 220 bar (threaded connection for R 1/8 nozzle).	<input type="checkbox"/>
Pipe cleaning nozzle									
Dirt blaster pipe cleaning D21/060	7	4.765-002.0		60	21 mm				<input type="checkbox"/>
Dirt blaster pipe cleaning D30/060	8	4.765-005.0		60	30 mm				<input type="checkbox"/>
Pipe cleaning nozzle	9	5.763-015.0		55	16 mm			16 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes.	<input type="checkbox"/>
	10	5.763-016.0		60	16 mm				<input type="checkbox"/>
	11	5.763-017.0		50	30 mm				30 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes.
Rotating pipe cleaning nozzle	12	6.415-428.0		50	16 mm			Rotating pipe cleaning nozzle with internal thread and four rotating jets for environmentally-friendly cleaning of blocked drains and pipes.	<input type="checkbox"/>
Drain cleaning dirt blaster D 25/060	13	6.415-945.0		60	25 mm			The forward-tilted rotating pencil jet removes the most stubborn dirt. The three backwards-tilted jets ensure the necessary forward movement, as well as convenient handling.	<input type="checkbox"/>
Drain cleaning dirt blaster D 30/060	14	6.415-947.0		60	30 mm				<input type="checkbox"/>
Drain cleaning dirt blaster D 35/060	15	6.415-949.0		60	35 mm				<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 9/18-4 CAGE *KAP 1.367-321.0

KÄRCHER



		Order No.	Flow rate	Nozzle size	Diame-ter	Price	Description	
Hard Surface Cleaner FRV 30								
FRV 30	1	2.642-999.0						<input type="checkbox"/>
Add-on kit rubber lip	2	2.642-910.0					For smooth floors indoors. The squeegee increases the suction performance of the FRV 30 and minimises the amount of water remaining. This means the floor is dry in just a few minutes.	<input type="checkbox"/>
Extension hose 5 m	3	4.440-939.0					5m extension hose for FRV 30. Connection sleeve included.	<input type="checkbox"/>
Add-on kit hose attachment	4	2.642-528.0						<input type="checkbox"/>
Add-on kit dirt trap	5	2.642-532.0						<input type="checkbox"/>
Hard surface cleaner FR 30								
FR 30	6	2.642-997.0			300 mm			<input type="checkbox"/>
Hard surface cleaner FR 30 ME								
FR 30 ME surface cleaner	7	2.640-355.0			300 mm		Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry.	<input type="checkbox"/>
Hard Surface Cleaner FR 50								
FR 50 surface cleaner	8	2.640-679.0			500 mm		Hot water resistant stainless steel surface cleaner with 500 mm working width. Ideal for large areas. With double ceramic bearings, push handle, non-marking swivel castors and detergent dosing system.	<input type="checkbox"/>
Machine-specific nozzle kit for FR								
Nozzle kit for surface cleaners (type-specific) 850 - 1100 l/h	9	2.640-442.0	850-1100 l/h				Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (850 to 1100 l/h).	<input type="checkbox"/>
Machine-specific nozzle kits for FRV								
Nozzle kit 050 for FRV 30	10	2.642-433.0		50				<input type="checkbox"/>
FRV 30 Me surface cleaner								
FRV 30 ME	11	2.642-911.0						<input type="checkbox"/>
Suction hose FRV 30 me	12	4.441-040.0						<input type="checkbox"/>
Surface Cleaner FR 50 Me								
	13	2.643-598.0						<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 9/18-4 CAGE *KAP 1.367-321.0

KÄRCHER



		Order No.	Flow rate				Price	Description	
Cup foam lance									
Foam lance nozzle Ø1,25	1	6.394-968.0							<input type="checkbox"/>
Tank grey only for replacement 1L	2	6.414-050.0							<input type="checkbox"/>
Inno Foam Kit									
Inno foam kit with detergent injector	3	2.640-151.0						High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or disinfection.	<input type="checkbox"/>
Easy Foam Set									
Easy Foam Set with RM injector	4	2.640-691.0						HP foam system for use with HD/HDS units for cleaning and disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine specific nozzle kit has to be ordered separately.	<input type="checkbox"/>
Nozzle kits for Inno/Easy Foam Set									
Nozzle kit 090 Inno/Easy kit 700 - 1000 l/h	5	2.640-688.0	700-1000 l/h					Nozzle kit contains Kärcher power nozzles and nozzle inserts. For Inno/Easy-Foam set 700-1000 l/h. For optimal foam system performance.	<input type="checkbox"/>
Foam nozzle mounting kit									
Foam nozzle kit	6	2.637-926.0						Foaming agent kit. The foam nozzle is ideal for use in sanitary areas and the food industry and wherever long application times are necessary.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 9/18-4 CAGE *KAP 1.367-321.0

KÄRCHER



		Order No.					Price	Description	
HP detergent injector									
Detergent injector for high pressure	1	3.637-170.0						Cleaning agent dosage at high pressure 3 - 5 %	<input type="checkbox"/>
Detergent injector for high and low pressure (without nozzles)	2	3.637-001.0						Detergent injector for independent high and low pressure dosage. Maximum dosage about 15%.	<input type="checkbox"/>
Machine-specific nozzle kit with order no. 3.637-170									
Nozzle insert trapezoidal thread HDS-GER	3	4.769-011.0							<input type="checkbox"/>
Machine-specific nozzle kit with order no. 3.637-170.0 750-1000 l/h	4	4.769-047.0						For HD/HDS 750 - 1000 l/h. Consists of nozzle insert + HP power nozzle + union	<input type="checkbox"/>
Nozzle insert with order no. 3.637-001									
Nozzle insert for Order No. 3.637-001, high-pressure for machines up to 1100 l/h.	5	4.769-003.0						Nozzle insert for detergent injector 3.637-001 for high-pressure detergent application. For high-pressure cleaners with a water flow rate up to 1100 l/h.	<input type="checkbox"/>
Low pressure for units rated up to 1100 l/h	6	4.769-001.0						For low pressure with machines up to 1.100 l/h	<input type="checkbox"/>
Rotary coupling									
Rotary coupling	7	4.401-091.0						Kärcher rotary coupling prevents twisting and kinking of high-pressure hoses for ease of use. Connector M 22 x 1.5 m. With grip protection.	<input type="checkbox"/>
Coupling									
Coupler -2xM22x1,5	8	4.403-002.0						Brass double connector for connecting and extending high-pressure hoses. With rubber protection. Connector: 2x M 22 x 1.5 m.	<input type="checkbox"/>
Connector									
Nozzle connector/screw connector	9	4.402-022.0						Nozzle connector/screw connector for connecting high-pressure nozzles and accessories to the high-pressure trigger gun (with nozzle connector). Connectors: 1x M 22 x 1.5 and 1x M 18 x 1.5.	<input type="checkbox"/>
Adapter									
Adapter M22 - Swivel	10	4.424-004.0						M22 x 1,5female and swivel connection. For extension of high-pressure hoses with AVS connection or for usage of the telescopic lance with a high-pressure hose with AVS connection.	<input type="checkbox"/>
Adapter EASY!Lock									
Adapter 1 M22AG-TR22AG	11	4.111-029.0							<input type="checkbox"/>
Adapter 2 M22IG-TR22AG	12	4.111-030.0							<input type="checkbox"/>
Adapter 3 M22IG-TR22AG	13	4.111-031.0							<input type="checkbox"/>
Adapter 5 TR22IG-M22AG	14	4.111-033.0							<input type="checkbox"/>
Adapter 6 TR22IG-M22AG	15	4.111-034.0							<input type="checkbox"/>
Adapter 7 M18IG-TR20AG	16	4.111-035.0							<input type="checkbox"/>
Adapter 8 TR20IG-M18AG	17	4.111-036.0							<input type="checkbox"/>
ADAPTER for replacement TR22IG-M22AG Er	18	4.111-046.0							<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 9/18-4 CAGE *KAP 1.367-321.0

KÄRCHER




		Order No.	Length				Price	Description	
Automatic, self-winding hose reels									
Add-on kit hose reel TR 40m	1	6.392-442.0	40 m						<input type="checkbox"/>
Swivel holder	2	2.639-931.0						Swivel holder for automatic hose reel wall mounting. For maximum action radius and flexibility of high-pressure hose. Rotatable 120°. Galvanised steel.	<input type="checkbox"/>
ABS wall fastening stainless steel	3	2.641-867.0						Swivelling wall bracket made of high-grade steel (for 2.641-866). This makes maximum flexibility and convenience possible when working with the HP hose.	<input type="checkbox"/>
Add-on kit hose reel plastics	4	6.392-975.0	20 m					Automatic hose reel for 20 m high-pressure hose. The console is made from powder-coated steel, the drum is made from plastic.	<input type="checkbox"/>
Add-on kit hose reel	5	6.392-965.0	20 m					Automatic hose reel for 20 m high-pressure hose. The console consists of stainless steel, the drum is made from plastic.	<input type="checkbox"/>
Hose reel, automatic, 20 m, painted	6	2.639-919.0	20 m					Automatic hose reel of durable plastic. Painted steel bracket. Suitable for 20 m high-pressure hose.	<input type="checkbox"/>
Hose reel, automatic, 20 m, stainless steel	7	6.391-421.0	20 m					Automatic stainless steel hose reel. With swivel holder. Suitable for 20 m high-pressure hose.	<input type="checkbox"/>
ABS hose reel stainless steel	8	2.641-866.0	20 m					High-grade, automatic steel hose reel. Especially suitable for use in the food industry. The material and finish provide for a corrosion-resistant, watertight capsuled sprong drive. Connection for HP hoses with nipple.	<input type="checkbox"/>
Add-on kit hose reel plastics	9	6.392-074.0	20 m					Automatic hose reel for 20 m high-pressure hose. The console is made from powder-coated steel, the drum is made from plastic.	<input type="checkbox"/>
Add-on kit hose reel	10	6.392-083.0	20 m					Automatic hose reel for 20 m high-pressure hose. The console consists of stainless steel, the drum is made from plastic.	<input type="checkbox"/>
Hose reel, automatic, 20 m, painted	11	6.392-106.0	20 m					Automatic hose reel of durable plastic. Painted steel bracket. Suitable for 20 m high-pressure hose.	<input type="checkbox"/>
Add-on kit hose reel lacquered basaltgra	12	6.392-105.0	20 m						<input type="checkbox"/>
Hose reel, automatic, 20 m, stainless steel	13	6.392-076.0	20 m					Automatic stainless steel hose reel. With swivel holder. Suitable for 20 m high-pressure hose.	<input type="checkbox"/>
ABS hose reel stainless steel	14	6.392-122.0	20 m					High-grade, automatic steel hose reel. Especially suitable for use in the food industry. The material and finish provide for a corrosion-resistant, watertight capsuled sprong drive. Connection for HP hoses with nipple.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 9/18-4 CAGE *KAP

1.367-321.0

KÄRCHER

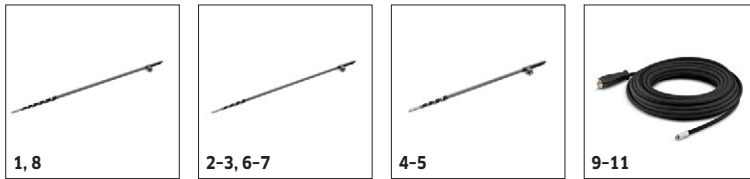

		Order No.	Flow rate	Feed temperature	Length	Length	Price	Description	
Solar cleaning - telescopic lances									
Telescopic rod complete 14m	1	4.110-002.0		max. 60 °C				Full carbon telescopic rod for maximum rigidity with minimal weight. With 14 m max. reach and practical quick-release couplings for easy extension and retraction.	<input type="checkbox"/>
Telescopic rod complete 10m CFK	2	4.110-007.0		max. 60 °C					<input type="checkbox"/>
Telescopic rod complete 10m	3	4.110-003.0		max. 60 °C				Telescopic rod made from a carbon/fibreglass mixture for maximum rigidity with minimum weight. With 10 m max. reach and practical quick-release couplings for easy extension and retraction.	<input type="checkbox"/>
iSolar TL 7 H (without hose)	4	4.110-004.0		max. 60 °C				Telescopic rod made from a carbon/fibreglass mixture for maximum rigidity with minimum weight. With 7.2 m max. reach and practical quick-release couplings for easy extension and retraction.	<input type="checkbox"/>
	5	4.107-054.0		max. 60 °C					<input type="checkbox"/>
Telescopic rod complete 10m	6	4.107-053.0		max. 60 °C				Telescopic rod made from a carbon/fibreglass mixture for maximum rigidity with minimum weight. With 10 m max. reach and practical quick-release couplings for easy extension and retraction.	<input type="checkbox"/>
Telescopic rod complete 10m CFK	7	4.107-055.0		max. 60 °C					<input type="checkbox"/>
Telescopic rod complete 14m	8	4.107-052.0		max. 60 °C				Full carbon telescopic rod for maximum rigidity with minimal weight. With 14 m max. reach and practical quick-release couplings for easy extension and retraction.	<input type="checkbox"/>
Hose solar	9	6.392-978.0		max. 155 °C				High-quality, flexible HP hose (with rubber covering) for the iSolar TL 7. The outer layer has especially good sliding properties when extending and retracting the telescopic rod.	<input type="checkbox"/>
	10	6.392-977.0		max. 155 °C				High-quality, flexible HP hose (with rubber covering) for the iSolar TL 10. The outer layer has especially good sliding properties when extending and retracting the telescopic rod.	<input type="checkbox"/>
	11	6.392-976.0		max. 155 °C				High-quality, flexible HP hose (with rubber covering) for the iSolar TL 14. The outer layer has especially good sliding properties when extending and retracting the telescopic rod.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 9/18-4 CAGE *KAP

1.367-321.0



		Order No.	Nozzle size				Price	Description	
Wet blasting attachment (without nozzle)									
Wet blasting attachment with flow control (without nozzles)	1	4.762-010.0						Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet.	<input type="checkbox"/>
Wet blasting attachment without flow control (nozzles not included)	2	4.762-022.0						Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet. Without flow control.	<input type="checkbox"/>
Nozzle pack for wet blasting attachment									
Nozzle kit for wet blasting attachment 050	3	2.637-902.0	50					Nozzle kit with wet blasting nozzle and nozzle insert (type specific). For optimal Kärcher wet blasting attachment performance. Only in combination with wet blasting attachment 4.762-010/-022.	<input type="checkbox"/>
Boron carbide nozzle									
Boron carbide nozzle, for machines as of 1000 l/h	4	6.415-084.0	6 mm					In addition to nozzle packs. Very wear-resistant nozzle with boron carbide chuck for continuous-duty operation.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 9/18-4 CAGE *KAP 1.367-321.0



		Order No.					Price	Description	
Y distributor									
Y distributor	1	4.405-048.0							<input type="checkbox"/>
	2	4.111-024.0							<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 9/18-4 CAGE *KAP 1.367-321.0

KÄRCHER



		Order No.	Length	Diameter		Price	Description	
Geka coupling								
With hose nozzle, R 3/4"	1	6.388-455.0					with hose liner	<input type="checkbox"/>
With female thread, R 3/4"	2	6.388-473.0					with female thread	<input type="checkbox"/>
Suction filter								
Water filter	3	6.414-956.0						<input type="checkbox"/>
Suction filter with check valve	4	4.730-012.0					Brass suction filter suitable for ponds, storage tanks, etc. With check valve.	<input type="checkbox"/>
Fine-mesh water filter								
Fine-mesh water filter with adapter	5	4.730-102.0					Fine-mesh water filter, 125 µm, max. temperature 50°C. Protects the high-pressure cleaner from dirt particles contained in the water. Water flow rate up to 1200 l/h. Connection 3/4", with adapter, 1".	<input type="checkbox"/>
Water supply hose								
Water supply hose	6	4.440-038.0	7.5 m				NW 13 R1" / R 3/4", up to 30 °C	<input type="checkbox"/>
Backflow check valve								
Backflow preventer	7	2.641-374.0					To prevent detergent getting into the drinking water cycle in case of inlet at low-pressure. - hot water resistant up to 80 °C - tested according to IEC 60335-2-79 - integrated leakage protection	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

HD 9/18-4 CAGE *KAP 1.367-321.0



		Order No.	Flow rate				Price	Description	
Push-on washing brush									
Push-on washing brush	1	4.762-497.0						With clamp for mounting directly to units' double or triple nozzle. Fits on new double and triple nozzles.	<input type="checkbox"/>
Rotating washing brush									
Washing brush rotary	2	4.762-559.0	900-1300 l/h						<input type="checkbox"/>
	3	4.762-562.0	900-1300 l/h						<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.