

NT 65/2 TACT² 15 AMP

The Kärcher Tact² systems are ever popular as specialist systems and as all-rounders thanks to their high level of mobility and excellent performance, their solid construction and their wide range of practical design features. The NT 65/2 Tact² is supplied with the entire antistatic package as standard. The system tackles even large amounts of fine dust.



Order no.

1.667-310.0

- Automatic Filter Cleaning System Tact²
- Anti-static system
- Adjustable push handle

Technical data

| | | |
|-----------------------------------|--------------------|-----------------|
| EAN code | | 886622021506 |
| Supply voltage | Ph / V / Hz | 1 / 120 / 60 |
| Air flow | l/s | 2 × 66 |
| Vacuum | mbar / kPa | 221 / 22.1 |
| Container content | l | 65 |
| Container material | | Plastic |
| Rated input power | W | max. 2760 |
| Standard nominal width | | ID 40 |
| Cable length | m | 10 |
| Sound pressure level | dB(A) | 73 |
| Colour | | anthracite |
| Weight without accessories | kg | 24.5 |
| Weight incl. packaging | kg | 32.8 |
| Dimensions (L × W × H) | mm | 575 × 490 × 880 |

Equipment


| | | |
|---|-----------------|--|
| Suction hose length | m | 4 |
| Suction hose type | | electrically conductive |
| Quantity of suction tubes | Piece(s) | 1 |
| Suction tubes length | mm | 550 |
| Suction tubes material | | Steel, chromed |
| Filter bag material | | Paper |
| Wet/dry floor nozzle width | mm | 360 |
| Crevice nozzle | | ■ |
| Drain hose (oil-resistant) | | ■ |
| Automatic cut-out features at max. filling quality | | ■ |
| Anti-static system | | ■ |
| Flat pleated filter | | PES |
| Filter cleaning | | Automatic Filter Cleaning System Tact ² |
| Sturdy bumper | | ■ |
| Protection class | | I |

■ included in the scope of supply.




Easy to transport

- Adjustable push handle and large wheels make transport easy even on uneven surfaces.

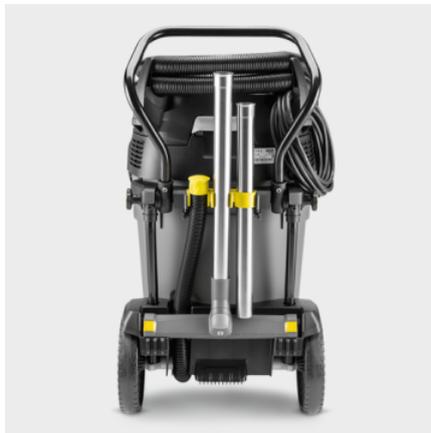

Intelligent accessory storage

- For example, the floor nozzle can be quickly fixed any way round.

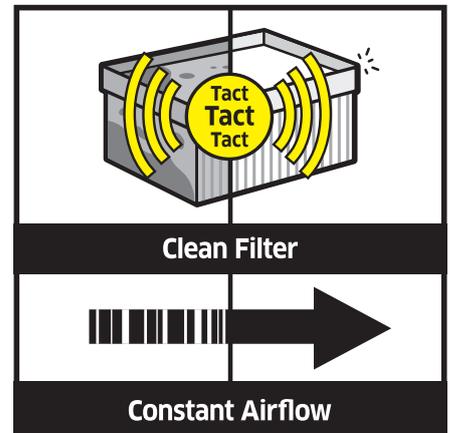

Automatic Filter Cleaning System Tact²

- The flat pleated filter can be removed from the clean side; it is divided into two halves, which are cleaned alternately by targeted blasts of air.
- Fine dusts cannot block the filter. A constant high air flow is maintained.
- Over 1000 kg of category A fine dust can be vacuumed without the need to change the filter.

ACCESSORIES FOR NT 65/2 TACT² 15 AMP

1.667-310.0



| | | Order no. | Description | |
|--|---|-------------|--|---|
| SUCTION NOZZLES | | | | |
| Floor nozzles | | | | |
| Wet/dry floor nozzle, DN 40, width 360 mm | 1 | 6.907-408.0 | For wet and dry vacuuming of fine dust, coarse dirt or liquids: plastic floor nozzle with rollers, 360 mm width and nominal size DN 40. Includes brush strips and squeegees. | ■ |
| Crevice nozzles | | | | |
| Crevice nozzle, NT, DN 40, plastic, 290 mm | 2 | 6.903-033.0 | Plastic crevice tool (DN 40) for vacuuming in crevices and corners. Length: 290 mm. | ■ |

Included in the scope of supply.
 Available accessories.