HDS 13/20-4 S

For maximum performance in the harshest conditions: the super class hot water high-pressure cleaner with 4-pole, water-cooled electric motor and robust 3-piston axial pump.














Order no.

1.071-937.0

Technical data		
EAN code		4054278955841
Current type	Ph / V / Hz	3 / 400 / 50
Flow Rate	l/h	600 - 1300
Operating pressure	bar / MPa	30 - 200 / 3 - 20
Temperature (supply 12°C)	°C	min. 80 - max. 155
Consumption fuel oil	kg/h	9.5
Heating oil consumption, eco!efficiency	kg/h	7.6
Power rating	kW	9.5
Power cable	m	5
Fuel tank	1	25
Weight (with accessories)	kg	206
Weight incl. packaging	kg	215.9
Dimensions (L × W × H)	mm	1330 × 750 × 1060

This device does not require instruction.

lieb preserve base		EASY!Force Advanced
ligh-pressure hose	m	10 / Longlife / DN 8,400 bar
Spray lance	mm	1050
Power nozzle		
Pressure switch control		
Optional two-lance operation		
Pole reversing plug (three-phase)		
SDS system		
Two detergent tanks		
Ory running protection		

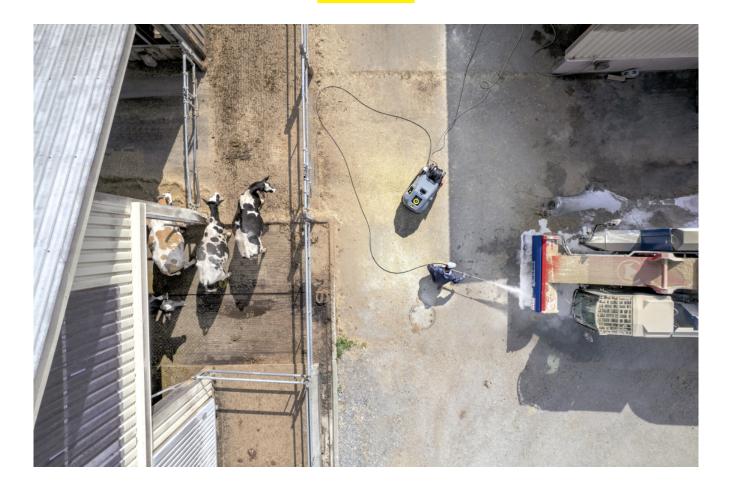



Multiple storage spaces for accessories integrated into the machine

- On-board storage for full range of accessories.
 Includes 2 hooks for suction hose and power cord.
- Spacious storage compartment, e.g. for detergents, gloves or tools.

Operational safety

- Easy-to-access water filter protects the pump against dirt particles in the water.
- Safety valves, water shortage and fuel protection ensure the availability of the machine.
- The Soft Damping System (SDS) compensates for vibration and pressure peaks in the high-pressure system.

Wide-ranging accessories with EASY!Lock

- EASY!Force Advanced for fatigue-free work without any holding force.
- Pressure and water volume can be adjusted on the Servo Control controller positioned between the lance and trigger gun.
- Rotating 1050 mm stainless steel lance.



























•
14

				T
		Order no.	Description	
TRIGGER GUNS		oraci no.	- State Patrick	H
Trigger guns				
EASY!Force Advanced	1	4.118-005.0	Effortless, not energy-sapping: the EASY!Force high-pressure gun uses the recoil force of the high-pressure jet to reduce the holding force for the operator to zero.	•
EASY!Force conversion kit 1 - from high-pressure hose	2	4.111-050.0	For retrofitting Kärcher high-pressure cleaners with existing high-pressure hose: EASY!Force conversion kit 1 with EASY!Force high-pressure gun, spray lance and all adapters through to the nozzle.	
EASY!Force conversion kit 2 - from machine	3	4.111-051.0	Developed for retrofitting existing high-pressure cleaners from Kårcher: EASY!Force conversion kit 2 with EASY!Force high-pressure gun, spray lance, high-pressure hose and necessary adapters.	
EASY!Force conversion kit 3 – high-pressure gun	4	4.111-052.0	Compatible with existing high-pressure hose and spray lance: EASY!Force conversion kit 3, incl. EASY!Force trigger gun and all necessary adapters for upgrading your high-pressure cleaner.	
Servo Control				
Servo Control, 1100 l/h -	5	4.118-009.0	Servo control for water flow and pressure control (> 1100 l/h) on the trigger gun.	
SPRAY LANCES				
Rotating spray lances				
Spray lance, 1050 mm, rotatable	6	4.112-000.0	1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	-
LED nozzle light	7	2.680-002.0	Bright, lightweight LED work light for direct mounting on spray lance of EASY!Force high-pressure gun. Better view in unfavourable lighting conditions for up to 5 working hours.	
Spray lance, 250 mm, rotatable	8	4.112-027.0	Spray lance, 250 mm, rotatable, ergonomic	
Spray lance, 400 mm, rotatable	9	4.112-024.0	Spray lance, 400 mm, rotatable, ergonomic	
Spray lance, 600 mm, rotatable	10	4.112-007.0	600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	
Spray lance, 840 mm, rotatable	11	4.112-006.0	850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	
Spray lance, 1550 mm, rotatable	12	4.112-018.0	1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	
Spray lance, 2050 mm, rotatable	13	4.112-021.0	2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	
Spray lance extender, 1000 mm	14	4.112-048.0	Spray lance extension with EASY!Lock connection. Length 1000 mm.	

[■] Included in delivery.

□ Available accessories.

EQUIPMENT FOR HDS 13/20-4 S 1.071-937.0























		Order no.	Description	
SPRAY LANCES				_
Double lance				Г
Double lance, 960 mm	15	2.112-016.0	960 mm double lance for variable pressure adjustment on handle at full water flow rate. Suitable for agricultural use (e.g. stable cleaning).	
Angular spray lance				
WC and gutter lance	16	4.112-029.0	Stainless steel lance WC and gutter with nozzle insert. Specially shaped for effective and hygienic cleaning of gutters and toilets.	
Flexible spray lance				Ī
Flexible lance, 1050 mm	17	4.112-035.0	1050 mm flexible lance with variable bend from 20° to 140° , ideal for cleaning difficult to reach areas, e.g. gutters.	
High pressure articulated joint	18	4.112-057.0	For hard-to-reach areas: High-pressure articulated joint with infinite angle adjustment up to 120°. Simply attach directly to the spray lance of the pressure washer.	
Gutter cleaner				Ī
Gutter cleaning lance	19	2.112-015.0	The lance is suited for cleaning of gutter systems. Because of the shape of the lance and the special nozzle the gutter can be cleaned without removing the cover plates.	I
Undercarriage spray lance				Ī
Underbody lance	20	4.112-032.0	Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle.	
Additional handle				Ī
Additional handle for EASY!Lock spray lances	21	4.321-380.0	Comfortable in every situation – the additional handle is easy to attach to the spray lance of our new EASY!Lock generation and makes work easier by allowing you to adjust your posture to suit the particular task.	
KÄRCHER POWER NOZZLE				
Power nozzie spray angle 25°				Ī
Power Nozzle , 070	22	2.113-028.0	Fan jet nozzle for large-area coverage and stubborn dirt and stains.	
HP nozzle spray angle 0°		I.		
Power nozzle 0°, 075	23	2.113-037.0	High-pressure nozzle with powerful jet for extremely stubborn dirt.	
Power nozzie spray angle 15°		I.		
Power nozzle 15°, 070	24	2.113-049.0	Fan jet nozzle with 15° spray angle suitable for stubborn dirt.	Ī
Power nozzle spray angle 40°		I.		_
Power Nozzle 40°, 075	25	2.113-056.0	Power nozzle with a 40° spray angle and fan jet, suitable for large areas and sensitive surfaces.	1
HIGH-PRESSURE HOSES				j
Longlife 400 with unions on both sides				ĺ
High-pressure hose Longlife, 10 m, DN 8, 400 bar, 2 × EASY!Lock	26	6.110-038.0	Durable, 10 m long high-pressure hose (ID 8) with double steel reinforcement and EASY!Lock hand screw connection at both ends and ANTIITwist. Approved for 400 bar pressure.	
High-pressure hose Longlife, 1,5 m, DN 8, 400 bar, 2 × EASY!Lock	27	6.110-024.0	1.5 m high-pressure hose (DN 8, M 22×1.5) with kink protection and connectors at both ends. For connecting to hose reels with appropriate connector (M 22×1.5).	_
Standard with unions on both sides				ĺ
High-pressure hose, 10 m, DN 8, 315 bar, 2 × EASY!Lock	28	6.110-031.0	10 m high-pressure hose (M 22 × 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	

 \blacksquare Included in delivery. \qed Available accessories.

























		Order no.	Description	
HIGH-PRESSURE HOSES		order no.	- State Profit	+
Standard with unions on both sides				
High-pressure hose, 15 m, DN 8, 315 bar, 2 × EASY!Lock	29	6.110-030.0	15 m high-pressure hose (M 22×1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN $8/155^{\circ}$ C/315 bar.	[
High-pressure hose, 20 m, DN 8, 315 bar, 2 × EASY!Lock	30	6.110-032.0	20 m high-pressure hose (M 22×1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN $8/155^{\circ}$ C/315 bar.	[
High-pressure hose, 30 m, DN 8, 315 bar, 2 × EASY!Lock	31	6.110-014.0	With rotary coupling, 2 × M 22 × 1.5	[
Food industry version with unions on both side	es	·		
High-pressure hose food grade, 10 m, DN 8, 250 bar, 2 × EASY!Lock	32	6.110-051.0	10 m high-pressure hose (DN 8) with patented (rotating) AVS trigger gun connector. Non-discolouring outer layer for use in the food industry. M 22×1.5 with anti-kink sleeve.	
High-pressure hose food grade, 20 m, DN 8, 250 bar, 2 × EASY!Lock	33	6.110-052.0	20 m high-pressure hose (DN 8) with swivel coupling. Non-discolouring outer layer for use in the food industry. Connectors at both ends, M 22 × 1.5, with kink protection. NW 8/155°C/250 bar.	
Longlife food industry version with unions on	both s	ides		
High-pressure hose food grade Longlife, 10 m, DN 8, 400 bar, $2 \times EASY!Lock$	34	6.110-053.0	With blue, non-marking and animal fat resistant outer covering: durable high-pressure hose (ID 8), 10 m long, ANTI!Twist and EASY!Lock hand screw connection at both ends.	
WEED CONTROL		<u> </u>		
WR 50	35	2.114-013.0	In combination with a hot water high-pressure cleaner from Kärcher, the 50 cm wide weed remover WR 50 is ideal for removing weeds. It comes with an adaptive chassis and nozzle adapter.	. [
WR 20	36	2.114-014.0	For thorough weed removal: The WR 20 weed remover for use with a hot water high-pressure cleaner from Kärcher. Equipped with a 20 cm wide nozzle bar and nozzle adapter.	
WR 100	37	2.114-015.0	Comfortable and fast weed removal: WR 100 weed remover with chassis, 100 cm wide nozzle bar and integrated nozzle adapter for use with hot water high-pressure cleaners.	
WR 10	38	2.114-016.0	In combination with hot water high-pressure cleaners our WR 10 weed remover enables fast and thorough weed removal. With 10 cm spray head and nozzle adapter.	
ECO!BOOSTER				
HydroBooster JET TR 080 Professional	39	2.113-089.0		Ε
QUICK CONNECT				Ė
Quick-fitting pipe union coupler trapezo	40	2.115-000.0	For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit, suitable for trigger gun/spray lance interface. With M 22 × 1.5 internal thread.	
Quick-fitting pipe union plug nipple tra	41	2.115-001.0	Hardened stainless steel male coupling for quick coupling 2.115-000. With M 22×1.5 external thread.	
DRUM AND TANK CLEANING				
Add-on kit mud sucker	42	2.641-798.0		

 $[\]blacksquare$ Included in delivery. \qed Available accessories.

























		l		_
		Order no.	Description	
OTHER HP ACCESSORIES	1			
Jet gun	43	2.869-067.0	Short set-up time, easy transport, instant switch off - the jet gun is the affordable cleaning method for all kinds of small to medium-sized areas. Adjustable pressure/water volume.	1 [
FLUE PIPE				
Flue gas adapter	44	4.656-079.0	Flue gas adapter with draught damper for flue pipe connection (adapter for HDS burners for connection to a stack system).	[
ROTARY NOZZLES (DIRT BLASTERS)				
Dirt blaster, large				
Dirt blaster, large, 070/080	45	4.114-030.0	The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzl and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C.	e [
MULTIPLE-JET NOZZLES				
Angle vario nozzle 0°-90°				
Angled Vario nozzle, 055	46	4.113-008.0	Variable angle nozzle for spray angle adjustment from 0° to 90° . For easy adjustment to all kinds o soiling and surfaces.	f
STEAM NOZZLE / NOZZLE PROTECTOR / ROLLO	VER N	OZZLE		T
Steam nozzle				
Steam jet nozzle 50°	47	4.116-001.0	50° flat jet for cleaning and thawing operations in steam mode, e.g. thawing sand and gravel, de-icing formwork, dewaxing vehicles.	
Steam jet nozzle 40°, 110	48	2.114-012.0		[
NOZZLE UNION / SPACER				Ť
Nozzle union				
Nozzle screws	49	4.112-011.0	Nozzle screws with protectors for high-pressure and power nozzles	[
PIPE CLEANING				Ť
Pipe cleaning hose, ID 6				
Hose assembly TR pipe cleaning DN6 max.2	50	6.110-046.0	The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	
Pipe cleaning hose, DN 6, 20 m, 220 bar	51	6.110-008.0	$20\mathrm{m}$ flexible high-pressure hose (DN 6) for cleaning pipes up to 220 bar (threaded connection for R $1/8$ nozzle).	[
Hose assembly TR pipe cleaning DN6 max.2	52	6.110-047.0	The 30 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	[
Pipe cleaning nozzle		·		
Dirt blaster pipe cleaning D21/090	53	4.765-003.0	The forward-tilted rotating pencil jet removes the most stubborn dirt. The three backwards-tilted	[
Dirt blaster pipe cleaning D30/090	54	4.765-010.0	jets ensure the necessary forward movement, as well as convenient handling.	[
Nozzle pipe cleaning size 100	55	5.763-088.0	Pipe cleaning nozzle with 24 mm diameter. With 4 nozzles tilted back at a 30° angle.	[
Pipe cleaning nozzle	56	5.763-019.0	16 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes.	

 $[\]hfill \square$ Available accessories.





























				Т
		Order no.	Description	\perp
PIPE CLEANING				
Pipe cleaning nozzle		1		
Pipe cleaning nozzle	57	5.763-020.0	16 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes.	
	58	5.763-021.0	30 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes.	
FLOOR AND HARD SURFACE CLEANER	<u>'</u>			
Hard Surface Cleaner FRV 30				
Add-on kit hose attachment	59	2.642-528.0	Suction cup for fixing the suction hose to smooth surfaces.	
Add-on kit dirt trap	60	2.642-532.0	Galvanised steel bucket for collecting coarse dirt and for fixing the suction hose in outside areas.	Г
Hard surface cleaner FR 30 ME				
FR 30 ME surface cleaner	61	2.111-013.0	Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry.	
Hard Surface Cleaner FR 50				
FR 50 surface cleaner	62	2.111-023.0	Hot water resistant stainless steel surface cleaner with 500 mm working width. Ideal for large areas.With double ceramic bearings, push handle, non-marking swivel castors and detergent dosing system.	g
Machine-specific nozzle kit for FR				
Nozzle kit for FR, 1100 l/h - 1300 l/h	63	2.639-188.0	Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (1100 to 1300 l/h).	
Machine-specific nozzle kits for FRV	•			
Nozzle kit for FRV, 080	64	2.642-982.0	Machine-specific nozzle kit with Kärcher power nozzles and jet nozzle for FRV 30.	
Hard surface cleaner FRV 30 Me				
FRV 30 Me Surface Cleaner	65	2.111-012.0	Thanks to automatic suction of the dirty water, the stainless steel FRV 30 Me Surface Cleaner makes surface cleaning more efficient in both inside and outside areas. Hot water cleaning up to 85°C.	
Extension hose FRV 30 Me and FRV 50 Me	66	4.441-040.0	5 m extension hose for FRV 30 Me. Includes connecting adapter.	Г
Surface Cleaner FR 50 Me				
FRV 50 Me surface cleaner	67	2.111-024.0	Surface cleaning with automatic suction of the dirty water for very large surfaces. Hot water cleaning up to 85°C.	
FOAM SYSTEMS				
Cup foam lance				
Cup foam lance Advanced 3, 900 l/h - 2500 l/h	68	4.112-065.0		
Cup foam lance DUO Advanced 3, 900 l/h - 2500 l/h	69	4.112-069.0		
Cup foam lance Basic 3, 900 l/h - 2500 l/h	70	4.112-055.0	For high-pressure cleaners with a flow rate of 900-2500 l/h: new, robust and very high-quality foam cup lance with outstanding foam quality while consuming half as much cleaning agent.	
☐ Available accessories.		1		

 $[\]hfill \square$ Available accessories.



























		Order no.	Description	
FOAM SYSTEMS				
Cup foam lance				
1-litre cleaning agent container for cup foam lance basic	71	5.071-414.0		
1-litre cleaning agent container for cup foam lance advanced	72	6.414-050.0	Additional 1-litre cleaning agent container for quick replacement of the cleaning agent (for foam lance 2.112-017.0 and 2.112-018.0).	
Inno Foam Set				
Inno foam kit with detergent injector	73	2.112-000.0	High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For	
Inno foam kit	74	2.112-008.0	use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or disinfection.	
Easy Foam Set		•		
Easy Foam Set with RM injector	75	2.112-010.0	HP foam system for use with. HD/HDS units for cleaning and disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine	
Easy foam set	76	2.112-011.0	12-011.0 specific nozzle kit has to be ordered separately.	
Nozzle kits for Inno/Easy Foam Set		'		
Nozzle kit 110 Inno/Easy set 1000 - 1300 l/h	77	2.111-020.0	Nozzle kit 110 contains Kärcher power nozzles and nozzle inserts. For Inn/Easy-Foam set 1000-1300 l/h. For optimal foam system performance.	
Foam nozzle mounting kit				
Foam nozzle kit	78	2.112-013.0	Foaming agent kit. The foam nozzle is ideal for use in sanitary areas and the food industry and wherever long application times are necessary.	
MIXERS AND INJECTORS				T
HP detergent injector				
Detergent injector for high and low pressure (without nozzles)	79	4.637-032.0	Detergent injector for independent high and low pressure dosage. Maximum dosage about 15%.	
Detergent injector for high pressure	80	4.637-033.0	Cleaning agent dosage at high pressure 3 - 5 %	
Machine-specific nozzle kit with order no. 3.63	7-170)		
Nozzle insert trapezoidal thread	81	4.769-013.0	For HD/HDS 1000 - 1200 l/h. Consists of nozzle insert + HP power nozzle + union	
Nozzle insert with order no. 3.637-001				Ť
High pressure for units rated 1100 l/h or more	82	4.769-002.0	For high pressure with machines above 1.100 l/h	
Low pressure for units rated 1100 l/h or more	83	4.769-006.0	For low pressure with machines above 1.100 l/h	
COUPLING PARTS				
Rotary coupling				
Rotary coupling	84	4.111-021.0	Kärcher rotary coupling prevents twisting and kinking of high-pressure hoses for ease of use. Connector Easy!Lock. With grip protection.	

[☐] Available accessories.





























				\top
		Order no.	Description	
COUPLING PARTS				
Connector				l,
Nozzle connector/screw connector	85	4.111-022.0	Nozzle connector/screw connector for connecting high-pressure nozzles and accessories to the high-pressure trigger gun (with nozzle connector). Connectors: $1x M 22 \times 1.5$ and $1x M 18 \times 1.5$.	[
Y distributor	86	4.111-024.0	Offers the option to connect two spray units to the machine. Installation on the high pressure outlet.	[
Short spray unit	87	4.111-038.0	For attaching high-pressure nozzles and accessory parts to HP trigger gun (with nozzle screws). No compatible with triple nozzles.	t [
Adapter EASY!Lock		'		Ť
Adapter 1 M22AG-TR22AG	88	4.111-029.0	Adapter 1 to connect the old hose with the new hose	[
Adapter 2 M22IG-TR22AG	89	4.111-030.0	Adapter 2 to connect the old device with the new hose and the old gun with the new hose	[
Adapter 3 M22IG-TR22AG	90	4.111-031.0	Adapter 3 to connect the old gun with the new spray lance and new servo regulator	1
Adapter M22 – Swivel	91	4.111-032.0	M22 \times 1,5female and swivel connection. For extension of high-pressure hoses with AVS connection or for usage of the telescopic lance with a high-pressure hose with AVS connection.	n [
Adapter 5 TR22IG-M22AG	92	4.111-033.0	Adapter 5 to connect the new gun with the old spray lance and new servo regulator with the old spray lance	
Adapter 6 TR22IG-M22AG	93	4.111-034.0	Adapter 6 to connect the new device with the old hose and the old hose with the new gun	
Adapter 7 M18IG-TR20AG	94	4.111-035.0	Adapter 7 to connect the old spray lance with the new nozzle	
Adapter 8 TR20IG-M18AG	95	4.111-036.0	Adapter 8 to connect the new spray lance with the old nozzle	[
Coupler -2xM22x1,5	96	4.111-037.0	Brass double connector for connecting and extending high-pressure hoses. With rubber protection. Connector: $2x \ M \ 22 \times 1.5 \ m$.	[
ADAPTER for replacement TR22IG-M22AG Er	97	4.111-046.0	Rotatable adapter for connecting EASY!Force high-pressure gun and high-pressure hoses with M 22x1.5 connection	[
HOSE REELS				Ċ
Automatic, self-winding hose reels				
Automatic plastic hose reel incl. high-pressure hose, 15 $\ensuremath{\mathrm{m}}$	98	2.639-257.0		
Available accessories		•		

[☐] Available accessories.

























				_
		Order no.	Description	
HOSE REELS				
Automatic, self-winding hose reels				
Automatic hose reel, powder-coated steel / plastic, 20 m	99	6.392-074.0	Automatic hose reel for 20 m high-pressure hose. The console is made from powder-coated steel, the drum is made from plastic.	
Automatic stainless steel / synthetic material hose drum, 20 m	100	6.392-083.0	Automatic hose reel for 20 m high-pressure hose. The console consists of stainless steel, the drum is made from plastic.	
Automatic hose reel, coated, 20 m	101	6.392-106.0	Automatic hose reel of durable plastic. Painted steel bracket. Suitable for 20 m high-pressure hose.	
Hose reel, automatic, basalt grey-coated, 20 m	102	6.392-105.0	Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses.	
Automatic hose reel, stainless steel, includes swivel holder, 20 m	103	6.392-076.0	Automatic stainless steel hose reel. With swivel holder. Suitable for 20 m high-pressure hose.	
Automatic stainless steel hose reel, 40 m	104	6.392-442.0	Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses. Compatible high-pressure hose, e.g. order no. 6.110-076.0 (ID 8, 40 m, 400 bar, 1x hose reel connection attachment kit).	
Powder-coated swivel holder	105	2.639-931.0	Swivel holder for automatic hose reel wall mounting. For maximum action radius and flexibility of high-pressure hose. Rotatable 120°. Galvanised steel.	
Stainless steel swivel holder	106	2.641-867.0	Swivelling wall bracket made of high-grade steel (for 2.641-866). This makes maximum flexibility and convenience possible when working with the HP hose.	
Anbausatz Schlauchtrommel automatik		!		
Attachment kit automatic hose reel HDS M/S	107	2.110-011.0	Automatic hose reel as a complete attachment kit that's easy to mount. Suitable for HDS medium and super class. For maximum convenience when winding and unwinding the high-pressure hose.	
Attachment kit automatic hose reel holder HDS M/S	108	2.110-020.0	Holder includes connection material for installing an automatic hose reel to machines in the HDS Middle and Super classes.	
Mounting kit AHR HDS-M/S Next	109	2.110-030.0		
FACADE AND SOLAR PANEL CLEANING				
Brushes				
Brush hard	110	6.960-133.0	Brush with hard bristles for cleaning industry facades and floor coverings and removing coarse dirt. Simple installation on telescopic lances or high-pressure lances from Kärcher.	
Brush medium	111	6.960-134.0	Optimally cleans facades, roller shutters and textile fabrics: the brush with medium-hard bristles for fast and simple attachment to telescopic lances or high-pressure lances from Kärcher.	
Brush soft	112	6.960-135.0	For simple installation on telescopic lances or high-pressure lances from Kärcher: brush with soft bristles for deep cleaning of sensitive surfaces such as glass or solar systems.	

[☐] Available accessories.





















				Т
		Order no.	Description	L
FACADE AND SOLAR PANEL CLEANIN	IG			
Brushes		1		
iSolar 800 Advanced	113	6.368-095.0	For water flow rates of 1,100-1,300 l/h: The 800-mm iSolar water-driven brush head with two contra-rotating disc brushes and flexible angle joint ensures that photovoltaic systems are given an even clean.	n _
iSolar 400 Advanced	114	6.368-093.0	The iSolar 400 water-driven disc brush (working width 400 mm) is designed for water flow rates of 1,100-1,300 l/h. For small to medium-sized photovoltaic systems (including elevated systems).	f
Telescopic				
TL low pressure adapter	115	4.580-097.0	TL low-pressure adapter comprising ball valve for tool-free installation on telescopic lances. Ideal for applications with rotating high-pressure brushes.	
Telescopic lance TL 7 F	116	4.762-609.0	Telescopic lance TL 7F with up to 7m reach made from robust and lightweight glass fibre. With practical quick-release fasteners for simple retraction and extension.	
Telescopic lance TL 7 H	117	4.762-610.0	Multifunctional hybrid telescopic lance TL 7 H made of rigid and lightweight carbon-glass fibre mix. Telescopic thanks to quick-release fastenings. Up to 7 m reach.	
Telescopic lance TL 10 H	118	4.762-611.0	Up to 10 m reach: hybrid telescopic lance TL 10 H. Comprising carbon-glass fibre mix and suitable for multifunctional use. Simple retraction and extension thanks to quick-release fasteners.	
Telescopic lance TL 10 C	119	4.762-612.0	Carbon fibre telescopic lance TL 10 C. With up to 10 m reach and practical quick-release fasteners. Multifunctional use for cleaning facades, windows or solar panels.	
Telescopic lance TL 14 C	120	4.762-613.0	Maximum rigidity with minimum weight: telescopic lance TL 14 C made from carbon fibre. Enormous reach of 14 m, multifunctional use and easy to use thanks to quick-release fasteners.	
TL high pressure adapter	121	4.775-154.0	TL high-pressure adapter, flexible high-pressure gun for high-pressure cleaning with telescopic lances. Ergonomic, easy to install, suitable for right- and left-handed individuals.	
Wasserenthärtung		<u> </u>		
WS 50	122	6.368-463.0	The mobile WS 50 water softening unit prevents lime residue on clean surfaces. A special ion-exchange resin removes the dissolved limescale from the water.	
WS 100	123	6.368-464.0	The mobile WS 100 water softening unit prevents lime residue on clean surfaces. A special ion-exchange resin removes the dissolved limescale from the water.	
WS Regenerator	124	6.368-465.0	With the WS Regenerator regeneration system, the softening cartridges of the water softening units WS 50 and WS 100 can be backflushed and regenerated at the push of a button.	5 C
Hoses				Ė
Hose solar	125	6.392-978.0	High-quality, flexible HP hose (with rubber covering) for the iSolar TL 7. The outer layer has especially good sliding properties when extending and retracting the telescopic rod.	
	126	6.392-977.0	High-quality, flexible HP hose (with rubber covering) for the iSolar TL 10. The outer layer has especially good sliding properties when extending and retracting the telescopic rod.	

 $[\]hfill \square$ Available accessories.

























	_			
		Order no.	Description	\perp
FACADE AND SOLAR PANEL CLEANING				
Hoses	1			
Hose solar	127	6.392-976.0	High-quality, flexible HP hose (with rubber covering) for the iSolar TL 14. The outer layer has especially good sliding properties when extending and retracting the telescopic rod.	
Attachment kits and adapters				
Case sheet steel	128	6.988-152.0	Certified personal security system for rooftop work. Contents: Travelling fall arrestor with shock absorber and 15 m kernmantle rope, harness, anchoring sling and sheet steel case.	
WET BLASTING ATTACHMENT				
Wet blasting attachment (without nozzle)				
Wet blasting attachment with flow control (without nozzles)	129	4.115-000.0	Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet.	
Wet blasting attachment without flow control (nozzles not included)	130	4.115-006.0	Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet. Without flow control.	
Nozzle pack for wet blasting attachment				
Nozzle pack TR wet jet set 0070	131	2.112-027.0	Consisting of wet jet nozzle and nozzle insert – only for use in combination with wet jet unit 4.115-000.0 4.115-006.0.	
Boron carbide nozzle				
Boron carbide nozzle, for machines as of 1000 $\mbox{l/h}$	132	6.415-083.0	In addition to nozzle packs. Very wear-resistant nozzle with boron carbide chuck for continuous-duty operation.	
DRUM AND TANK CLEANING				
Barrel and tank cleaning				
Barrel cleaner BC 14/12	133	2.112-020.0	The barrel cleaner BC 14/12 is a spray unit for the internal cleaning of containers and drums – in particular oak barrels with a capacity between 225 and 600 liters.	
Rotary cleaner head M63E	134	6.751-061.0		
ADD-ON KITS				Ė
Flame monitoring attachment kit				
ABS flame monitor for HDS M/S	135	2.641-796.0	More safety thanks to ABS HDS M/S flame monitoring system: A light sensor monitors the burner flame. The fuel supply cuts out automatically if the flame extinguishes.	
WATER CONNECTION				
Geka coupling				
With hose nozzle, R 3/4"	136	6.388-455.0	with hose liner	
With hose nozzle, R 1"	137	6.388-465.0	with hose barb	
Hose coupling	138	6.388-458.0	with female thread	
Suction filter				t
Water filter	139	6.414-956.0	Suitable for ponds, storage tanks or similar, polyamide filter casing, stainless steel strainer, 800 μm mesh, R 3/4" and R 1" connection, without non-return valve	u [
Suction filter with check valve	140	4.730-012.0	Brass suction filter suitable for ponds, storage tanks, etc. With check valve.	Г

[☐] Available accessories.















		Order no.	Description	
WATER CONNECTION				_
Fine-mesh water filter				
Add-on kit water filter universal	141	2.637-020.0		
Fine-mesh water filter with adapter	142	4.730-102.0	Fine-mesh water filter, $125 \mu m$, max. temperature 50° C. Protects the high-pressure cleaner from dirt particles contained in the water. Water flow rate up to 1200 l/h . Connection $3/4^{\circ}$, with adapter, 1° .	,
Fine-mesh water filter, 100 μ m, R 1"	143	2.638-270.0	Fine-mesh water filter, $100 \mu m$, max. temperature 60° C. Connects to high-pressure cleaner. Protects the high-pressure cleaner from dirt particles contained in the water. Water flow rate up to $1200 l/h$. Connector 1".	; <u> </u>
Water supply hose				
Water supply hose	144	4.440-207.0	NW 19 R1" / R 3/4", up to 85 $^{\circ}$ C, for pick-up	
	145	4.440-270.0	NW 19 R1" / R1", up to 85 °C	
WASHING BRUSHES				
Push-on washing brush				
Push-on wash brush, M 18×1.5	146	4.113-001.0	Push-on wash brush for universal use. Simply push on to lance. Connector: M 18×1.6 .	
Rotating washing brush				
Rotating wash brush for > 800 l/h machines, nylon bristles	147	4.113-002.0	Driven by water stream. Gently removes fine dust and traffic film from any surface. Temperature resistant up to 60° C, M 18×1.5 (replaceable brush insert).	
Rotating wash brush for > 800 l/h machines, natural bristles	148	4.113-005.0		

[☐] Available accessories.