

HDS 7/10-4 M

Medium class hot water pressure washer with a host of user-friendly features.



Order no.

1.077-901.0

Axial pump with turbo blower

Users must receive training on this device.

Economical eco!efficiency mode

SDS system

Technical data		
EAN code		4054278140032
Current type	Ph / V / Hz	1 / 240 / 50
Flow Rate	l/h	350 - 700
Operating pressure	bar / MPa	30 - 100 / 3 - 10
Temperature (supply 12°C)	°C	min. 80 - max. 155
Power rating	kW	3.4
Consumption fuel oil	kg/h	4.6
Heating oil consumption, eco!efficiency	kg/h	3.7
Power cable	m	5
Fuel tank	1	25
Weight (with accessories)	kg	159.3
Weight incl. packaging	kg	171.3
Dimensions (L × W × H)	mm	1330 × 750 × 1060

Equipment		-
Trigger gun		EASY!Force Advanced
High-pressure hose length	m	10
High-pressure hose type		Longlife
Spray lance	mm	1050
Power nozzle		
ANTI!Twist		
Tanks for detergent, scale inhibitor and fuel can be filled from outside		•
Control panel with indicator lamps		•
Pressure switch control		
Electronic service control with LED display		•
Servo Control		•
Two detergent tanks		-
Dry running protection		

HDS 7/10-4 M, 1.077-901.0, 2025-05-05







Efficiency

- In ecolefficiency mode, the machine operates in the most economical temperature range (60 °C) – with full water flow.
- The burner cycles are optimised to reduce fuel consumption by 20% compared to full load operation.



Maximum efficiency

- Highly efficient burner technology.
- 4-pole, slow-running electric motor guarantees a long working time.



Operational safety

- The large, integrated fine-mesh water filter reliably protects the high-pressure pump against dirt particles.
- An integrated exhaust gas thermostat switches off the drive motor if the exhaust gas temperature exceeds 300°C.
- The Soft Damping System (SDS) compensates for vibration and pressure peaks in the high-pressure system.

EQUIPMENT FOR HDS 7/10-4 M 1.077-901.0



		Order no.	Description	
TRIGGER GUNS				
Trigger guns				
EASY!Force Advanced	1	4.118-005.0	Effortless, not energy-sapping: the EASY!Force high-pressure gun uses the recoil force of the high-pressure jet to reduce the holding force for the operator to zero.	
EASY!Force conversion kit 1 - from high-pressure hose	2	4.111-050.0	For retrofitting Kårcher high-pressure cleaners with existing high-pressure hose: EASY!Force conversion kit 1 with EASY!Force high-pressure gun, spray lance and all adapters through to the nozzle.	
EASY!Force conversion kit 2 - from machine	3	4.111-051.0	Developed for retrofitting existing high-pressure cleaners from Kärcher: EASY!Force conversion kit 2 with EASY!Force high-pressure gun, spray lance, high-pressure hose and necessary adapters.	
EASY!Force conversion kit 3 - high-pressure gun	4	4.111-052.0	Compatible with existing high-pressure hose and spray lance: EASY!Force conversion kit 3, incl. EASY!Force trigger gun and all necessary adapters for upgrading your high-pressure cleaner.	
Servo Control				
Servo Control, 750 l/h - 1100 l/h	5	4.118-008.0	Water quantity and pressure regulated directly from the hand spray gun.	
SPRAY LANCES				
Rotating spray lances				
Spray lance, 1050 mm, rotatable	6	4.112-000.0	1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	
LED nozzle light	7	2.680-002.0	Bright, lightweight LED work light for direct mounting on spray lance of EASY!Force high-pressure gun. Better view in unfavourable lighting conditions for up to 5 working hours.	
Spray lance, 250 mm, rotatable	8	4.112-027.0	Spray lance, 250 mm, rotatable, ergonomic	
Spray lance, 400 mm, rotatable	9	4.112-024.0	Spray lance, 400 mm, rotatable, ergonomic	
Spray lance, 600 mm, rotatable	10	4.112-007.0	600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	
Spray lance, 840 mm, rotatable	11	4.112-006.0	850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	
Spray lance, 1550 mm, rotatable	12	4.112-018.0	1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	
Spray lance, 2050 mm, rotatable	13	4.112-021.0	2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	
Spray lance extender, 1000 mm	14	4.112-048.0	Spray lance extension with EASY!Lock connection. Length 1000 mm.	

■ Included in delivery. □ Available accessories.

EQUIPMENT FOR HDS 7/10-4 M 1.077-901.0



		1		—
		Order no.	Description	
SPRAY LANCES				
Double lance				
Double lance, 960 mm	15	2.112-016.0	960 mm double lance for variable pressure adjustment on handle at full water flow rate. Suitable for agricultural use (e.g. stable cleaning).	
Angular spray lance				
WC and gutter lance	16	4.112-029.0	Stainless steel lance WC and gutter with nozzle insert. Specially shaped for effective and hygienic cleaning of gutters and toilets.	
Flexible spray lance				
Flexible lance, 1050 mm	17	4.112-035.0	1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters.	
High pressure articulated joint	18	4.112-057.0	For hard-to-reach areas: High-pressure articulated joint with infinite angle adjustment up to 120°. Simply attach directly to the spray lance of the pressure washer.	
Gutter cleaner				
Gutter cleaning lance	19	2.112-015.0	The lance is suited for cleaning of gutter systems. Because of the shape of the lance and the special nozzle the gutter can be cleaned without removing the cover plates.	il 🗆
Undercarriage spray lance				
Underbody lance	20	4.112-032.0	Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle.	
Additional handle				
Additional handle for EASY!Lock spray lances	21	4.321-380.0	Comfortable in every situation - the additional handle is easy to attach to the spray lance of our new EASY!Lock generation and makes work easier by allowing you to adjust your posture to suit the particular task.	
KÄRCHER POWER NOZZLE				
Power nozzle spray angle 25°				
Power Nozzle , 054	22	2.113-011.0	Flat jet nozzle for large area performance and stubborn dirt.	
HP nozzle spray angle 0°		1		
Power nozzle 0°, 055	23	2.113-035.0	High-pressure nozzle with powerful jet for extremely stubborn dirt.	
Power nozzle spray angle 15°	1	1	L	
Power nozzle 15°, 055	24	2.113-047.0	Fan jet nozzle with 15° spray angle suitable for stubborn dirt.	
Power nozzle spray angle 40°		1		-
Power Nozzle 40°, 055	25	2.113-055.0	Power nozzle with a 40° spray angle and fan jet, suitable for large areas and sensitive surfaces.	
HIGH-PRESSURE HOSES				
Longlife 400 with unions on both sides				
High-pressure hose Longlife, 10 m, ID 8, 400 bar, 2 × EASY!Lock	26	6.110-038.0	Durable, 10 m long high-pressure hose (ID 8) with double steel reinforcement and EASY!Lock hand screw connection at both ends and ANTI!Twist. Approved for 400 bar pressure.	
High-pressure hose Longlife, 1,5 m, ID 8, 400 bar, 2 × EASY!Lock	27	6.110-024.0	1.5 m high-pressure hose (DN 8, M 22×1.5) with kink protection and connectors at both ends. For connecting to hose reels with appropriate connector (M 22×1.5).	· [
High-pressure hose Longlife, 30 m, ID 8, 400	28	6.110-023.0	With rotary coupling, 2 × M 22 × 1.5	

■ Included in delivery. □ Available accessories.

EQUIPMENT FOR HDS 7/10-4 M 1.077-901.0



		Order no.	Description	
HIGH-PRESSURE HOSES				
Longlife 400 with unions on both sides		1		
High-pressure hose Longlife, 20 m, ID 8, 400 bar, 2 × EASY!Lock	29	6.110-027.0	with rotary coupling, 2 × M 22 × 1.5	
High-pressure hose Longlife, 15 m, ID 8, 400 bar, 2 × EASY!Lock	30	6.110-029.0	With rotary coupling, 2 × M 22 × 1.5	
Standard with unions on both sides				
High-pressure hose, 10 m, ID 10, 220 bar, 2 × EASY!Lock	31	6.110-041.0		
High-pressure hose, 10 m, ID 8, 315 bar, 2 × EASY!Lock	32	6.110-031.0	10 m high-pressure hose (M 22 × 1.5) with kink protection. With patented rotating TR22 trigger gui connector and manual coupling. Further data: DN 8/155°C/315 bar.	n 🗆
High-pressure hose, 15 m, ID 8, 315 bar, 2 × EASY!Lock	33	6.110-030.0	15 m high-pressure hose (M 22 × 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	
High-pressure hose, 20 m, ID 8, 315 bar, 2 × EASY!Lock	34	6.110-032.0	20 m high-pressure hose (M 22 × 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	
High-pressure hose, 30 m, ID 8, 315 bar, 2 × EASY!Lock	35	6.110-014.0	With rotary coupling, 2 × M 22 × 1.5	
High-pressure hose, 15 m, ID 10, 220 bar, 2 × EASY!Lock	36	6.110-042.0	15 m high-pressure hose M 22 \times 1.5) with kink protection and threaded couplings at both ends. Further data: DN 10/155°C/220 bar.	
High-pressure hose, 20 m, ID 10, 220 bar, 2 × EASY!Lock	37	6.110-043.0	with union on both sides, M 22 \times 1.5 with anti-kink protection. NW 10/155°C/220 bar	
High-pressure hose, 25 m, ID 10, 220 bar, 2 × EASY!Lock	38	6.110-044.0		
High-pressure hose, 40 m, ID 10, 220 bar, 2 × EASY!Lock	39	6.110-045.0		
High-pressure hose, 15 m, ID 12, 210 bar, 2 × EASY!Lock	40	6.110-059.0	High-pressure hose for water volumes greater than 1,800 l / h. With union on both sides. 2x M 22×1.5 with anti-kink protection.	
High-pressure hose, 40 m, ID 12, 210 bar, 2 × EASY!Lock	41	6.110-060.0		
Food industry version with unions on both sid	les	1	1	_
High-pressure hose food grade, 10 m, ID 8, 250 bar, 2 × EASY!Lock	42	6.110-051.0	10 m high-pressure hose (DN 8) with patented (rotating) AVS trigger gun connector. Non-discolouring outer layer for use in the food industry. M 22 × 1.5 with anti-kink sleeve.	

EQUIPMENT FOR HDS 7/10-4 M 1.077-901.0



			_
	Order no.	Description	
les			
43	6.110-052.0	20 m high-pressure hose (DN 8) with swivel coupling. Non-discolouring outer layer for use in the food industry. Connectors at both ends, M 22 × 1.5, with kink protection. NW 8/155°C/250 bar.	
both s	sides		
, 44	6.110-053.0	With blue, non-marking and animal fat resistant outer covering: durable high-pressure hose (ID 8), 10 m long, ANTI!Twist and EASY!Lock hand screw connection at both ends.	
45	2.114-013.0	In combination with a hot water high-pressure cleaner from Kärcher, the 50 cm wide weed remover WR 50 is ideal for removing weeds. It comes with an adaptive chassis and nozzle adapter	r.
46	2.114-014.0	For thorough weed removal: The WR 20 weed remover for use with a hot water high-pressure cleaner from Kärcher. Equipped with a 20 cm wide nozzle bar and nozzle adapter.	
47	2.114-015.0	Comfortable and fast weed removal: WR 100 weed remover with chassis, 100 cm wide nozzle bar and integrated nozzle adapter for use with hot water high-pressure cleaners.	
48	2.114-016.0	In combination with hot water high-pressure cleaners our WR 10 weed remover enables fast and thorough weed removal. With 10 cm spray head and nozzle adapter.	
49	2.115-000.0	For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit, suitable for trigger gun/spray lance interface. With M 22 × 1.5 internal thread.	
50	2.115-001.0	Hardened stainless steel male coupling for quick coupling 2.115-000. With M 22 × 1.5 external thread.	
51	2.641-798.0		
52	2.869-067.0	Short set-up time, easy transport, instant switch off – the jet gun is the affordable cleaning method for all kinds of small to medium-sized areas. Adjustable pressure/water volume.	1
53	4.656-149.0	Flue gas adapter with draught damper for flue pipe connection (adapter for HDS burners for	
54	4.656-080.0	connection to a stack system).	
55	2.880-001.0		
56	4.114-036.0	The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzl and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C.	ie 🗆
	• • • 44 • 45 • 45 • 46 • 47 • 47 • 50 • 50 • 51 • 52 • 52 • 53 • 54	43 6.110-052.0 both sides 44 6.110-053.0 44 6.110-053.0 45 2.114-013.0 46 2.114-014.0 47 2.114-015.0 48 2.114-016.0 49 2.115-000.0 50 2.115-001.0 51 2.641-798.0 53 4.656-149.0 54 4.656-080.0 55 2.880-001.0	43 6.110-052.0 20 m high-pressure hose (DN 8) with swivel coupling. Non-discolouring outer layer for use in the food industry. Connectors at both ends, M 22 × 1.5, with kink protection. NW 8/155°C/250 bar. both sides 44 6.110-053.0 With blue, non-marking and animal fat resistant outer covering: durable high-pressure hose (ID 8), 10 m long. ANTIFIWist and EASYLock hand screw connection at both ends. 45 2.114-013.0 In combination with a hot water high-pressure cleaner from Kärcher, the 50 cm wide weed remover WR 50 is ideal for removing weeds. It comes with an adaptive chassis and nozzle adapter cleaner from Kärcher. Equipped with a 2.0 cm wide nozzle bar and nozzle adapter. 47 2.114-014.0 For thorough weed removal: The WR 20 weed remover for use with and adaptive chassis, 100 cm wide nozzle bar and nozzle adapter. 48 2.114-015.0 Comfortable and fast weed removal: WR 100 weed remover with chassis, 100 cm wide nozzle bar and integrated nozzle adapter for use with hot water high-pressure cleaners. 49 2.115-000.0 For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit, suitable for trigger gur/spray lance interface. With M 22 × 1.5 internal thread. 50 2.115-001.0 Hardened stainless steel male coupling for quick coupling 2.115-000. With M 22 × 1.5 external thread. 51 2.641-798.0 Short set-up time, easy transport, instant switch off - the jet gun is the affordable cleaning methoc for all kinds of small to medium-sized areas. Adjustable pressure/water volume.

□ Available accessories.


HDS 7/10-4 M, 1.077-901.0, 2025-05-05

EQUIPMENT FOR HDS 7/10-4 M 1.077-901.0







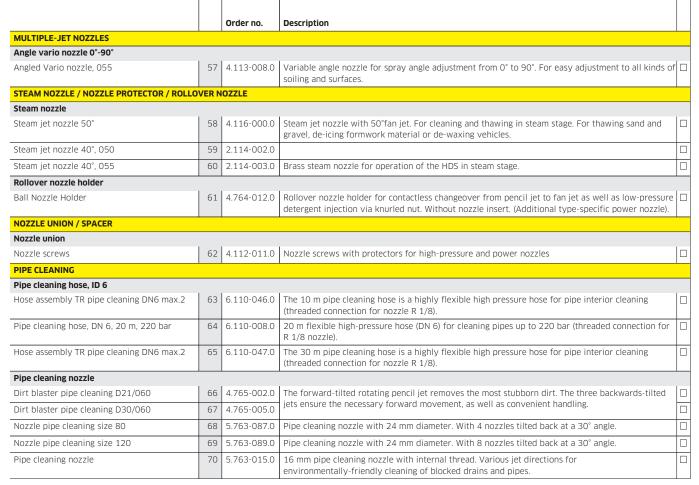

EQUIPMENT FOR HDS 7/10-4 M 1.077-901.0

70-71 72 72 72 72 72 72 72 72 72 72 72 72 72 72 72	7		$ \begin{array}{c} \begin{array}{c} \begin{array}{c} \end{array}\\ \end{array}\\ \end{array}\\ \end{array}\\ \end{array} $	
		Order no	Description	
PIPE CLEANING		Order no.	Description	
Pipe cleaning nozzle				
Pipe cleaning nozzle	71	5.763-016.0	16 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes.	
	72	5.763-021.0	30 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes.	
Rotating pipe cleaning nozzle	73	6.415-428.0	Rotating pipe cleaning nozzle with internal thread and four rotating jets for environmentally-friendly cleaning of blocked drains and pipes.	
FLOOR AND HARD SURFACE CLEANER				
Hard Surface Cleaner FRV 30				
Add-on kit hose attachment	74	2.642-528.0	Suction cup for fixing the suction hose to smooth surfaces.	
Add-on kit dirt trap	75	2.642-532.0	Galvanised steel bucket for collecting coarse dirt and for fixing the suction hose in outside areas.	
Hard surface cleaner FR 30 ME		1		
FR 30 ME surface cleaner	76	2.111-013.0	Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry.	
Hard Surface Cleaner FR 50				
FR 50 surface cleaner	77	2.111-023.0	Hot water resistant stainless steel surface cleaner with 500 mm working width. Ideal for large areas.With double ceramic bearings, push handle, non-marking swivel castors and detergent dosing system.	3
Machine-specific nozzle kit for FR				
Nozzle kit for FR, 650 l/h - 850 l/h	78	2.639-187.0	Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (650 to 850 l/h).	
Machine-specific nozzle kits for FRV				
Nozzle kit for FRV, 080	79	2.642-982.0	Machine-specific nozzle kit with Kärcher power nozzles and jet nozzle for FRV 30.	
Hard surface cleaner FRV 30 Me				
FRV 30 Me Surface Cleaner	80	2.111-012.0	Thanks to automatic suction of the dirty water, the stainless steel FRV 30 Me Surface Cleaner makes surface cleaning more efficient in both inside and outside areas. Hot water cleaning up to 85°C.	
Extension hose FRV 30 Me and FRV 50 Me	81	4.441-040.0	5 m extension hose for FRV 30 Me. Includes connecting adapter.	
FOAM SYSTEMS				
Cup foam lance				
Cup foam lance Advanced 2, 700 l/h - 800 l/h	82	4.112-064.0		
Cup foam lance DUO Advanced 2, 700 I/h - 800 I/h	83	4.112-068.0		
Cup foam lance Basic 2, 700 l/h - 800 l/h	84	4.112-054.0	For high-pressure cleaners with a flow rate of 700-800 l/h: new, robust and very high-quality foam cup lance with outstanding foam quality while consuming half as much cleaning agent.	

EQUIPMENT FOR HDS 7/10-4 M 1.077-901.0



		Order no.	Description	
FOAM SYSTEMS				
Cup foam lance				
1-litre cleaning agent container for cup foam lance basic	85	5.071-414.0		
1-litre cleaning agent container for cup foam lance advanced	86	6.414-050.0	Additional 1-litre cleaning agent container for quick replacement of the cleaning agent (for foam lance 2.112-017.0 and 2.112-018.0).	
Inno Foam Set				
Inno foam kit with detergent injector	87	2.112-000.0	High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or	
Inno foam kit	88	2.112-008.0	disinfection.	
Easy Foam Set				
Easy Foam Set with RM injector	89	2.112-010.0	HP foam system for use with. HD/HDS units for cleaning and disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine	
Easy foam set	90	2.112-011.0	specific nozzle kit has to be ordered separately.	
Nozzle kits for Inno/Easy Foam Set				
Nozzle kit 090 Inno/Easy kit 700 - 1000 l/h	91	2.111-019.0	Nozzle kit contains Kärcher power nozzles and nozzle inserts. For Inno/Easy-Foam set 700-1000 l/h. For optimal foam system performance.	
Foam nozzle mounting kit				
Foam nozzle kit	92	2.112-013.0	Foaming agent kit. The foam nozzle is ideal for use in sanitary areas and the food industry and wherever long application times are necessary.	
MIXERS AND INJECTORS				
HP detergent injector				
Detergent injector for high and low pressure (without nozzles)	93	4.637-032.0	Detergent injector for independent high and low pressure dosage. Maximum dosage about 15%.	
Detergent injector for high pressure	94	4.637-033.0	Cleaning agent dosage at high pressure 3 - 5 %	
Machine-specific nozzle kit with order no. 3.63	37-170)		
Nozzle insert trapezoidal thread HDS-GER	95	4.769-011.0	For HD/HDS 750 - 1000 l/h. Consists of nozzle insert + HP power nozzle + union	
Nozzle insert with order no. 3.637-001			•	
Nozzle insert for Order No. 3.637-001, high-pressure for machines up to 1100 l/h.	96	4.769-003.0	Nozzle insert for detergent injector 3.637-001 for high-pressure detergent application. For high-pressure cleaners with a water flow rate up to 1100 l/h.	
Low pressure for units rated up to 1100 l/h	97	4.769-001.0	For low pressure with machines up to 1.100 l/h	
COUPLING PARTS				
Rotary coupling				
Rotary coupling	98	4.111-021.0	Kårcher rotary coupling prevents twisting and kinking of high-pressure hoses for ease of use. Connector Easy!Lock. With grip protection.	

EQUIPMENT FOR HDS 7/10-4 M 1.077-901.0



		Order no.	Description	
COUPLING PARTS				
Connector				
Nozzle connector/screw connector	99	4.111-022.0	Nozzle connector/screw connector for connecting high-pressure nozzles and accessories to the high-pressure trigger gun (with nozzle connector). Connectors: $1 \times M 22 \times 1.5$ and $1 \times M 18 \times 1.5$.	
Y distributor	100	4.111-024.0	Offers the option to connect two spray units to the machine. Installation on the high pressure outlet.	
Short spray unit	101	4.111-038.0	For attaching high-pressure nozzles and accessory parts to HP trigger gun (with nozzle screws). Not compatible with triple nozzles.	(
Adapter EASY!Lock				
Adapter 1 M22AG-TR22AG	102	4.111-029.0	Adapter 1 to connect the old hose with the new hose	
Adapter 2 M22IG-TR22AG	103	4.111-030.0	Adapter 2 to connect the old device with the new hose and the old gun with the new hose	
Adapter 3 M22IG-TR22AG	104	4.111-031.0	Adapter 3 to connect the old gun with the new spray lance and new servo regulator	
Adapter M22 - Swivel	105	4.111-032.0	M22 × 1,5female and swivel connection. For extension of high-pressure hoses with AVS connection or for usage of the telescopic lance with a high-pressure hose with AVS connection.	
Adapter 5 TR22IG-M22AG	106	4.111-033.0	Adapter 5 to connect the new gun with the old spray lance and new servo regulator with the old spray lance	
Adapter 6 TR22IG-M22AG	107	4.111-034.0	Adapter 6 to connect the new device with the old hose and the old hose with the new gun	
Adapter 7 M18IG-TR20AG	108	4.111-035.0	Adapter 7 to connect the old spray lance with the new nozzle	
Adapter 8 TR20IG-M18AG	109	4.111-036.0	Adapter 8 to connect the new spray lance with the old nozzle	
Coupler -2xM22x1,5	110	4.111-037.0	Brass double connector for connecting and extending high-pressure hoses. With rubber protection. Connector: $2 \times M 22 \times 1.5$ m.	
ADAPTER for replacement TR22IG-M22AG Er	111	4.111-046.0	Rotatable adapter for connecting EASY!Force high-pressure gun and high-pressure hoses with M 22x1.5 connection	
HOSE REELS				
Automatic, self-winding hose reels				
Automatic plastic hose reel incl. high-pressure hose, 15 \mbox{m}	112	2.639-257.0		

EQUIPMENT FOR HDS 7/10-4 M 1.077-901.0



				-
		Order no.	Description	
HOSE REELS				
Automatic, self-winding hose reels				
Automatic hose reel, powder-coated steel / plastic, 20 m	113	6.392-074.0	Automatic hose reel for 20 m high-pressure hose. The console is made from powder-coated steel, the drum is made from plastic.	
Automatic stainless steel / synthetic material hose drum, 20 m	114	6.392-083.0	Automatic hose reel for 20 m high-pressure hose. The console consists of stainless steel, the drum is made from plastic.	
Automatic hose reel, coated, 20 m	115	6.392-106.0	Automatic hose reel of durable plastic. Painted steel bracket. Suitable for 20 m high-pressure hose.	. 🗆
Hose reel, automatic, basalt grey-coated, 20 m	116	6.392-105.0	Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses.	
Automatic hose reel, stainless steel, includes swivel holder, 20 m	117	6.392-076.0	Automatic stainless steel hose reel. With swivel holder. Suitable for 20 m high-pressure hose.	
Automatic stainless steel hose reel, 40 m	118	6.392-442.0	Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses. Compatible high-pressure hose, e.g. order no. 6.110-076.0 (ID 8, 40 m, 400 bar, 1x hose reel connection attachment kit).	
Powder-coated swivel holder	119	2.639-931.0	Swivel holder for automatic hose reel wall mounting. For maximum action radius and flexibility of high-pressure hose. Rotatable 120°. Galvanised steel.	
Stainless steel swivel holder	120	2.641-867.0	Swivelling wall bracket made of high-grade steel (for 2.641-866). This makes maximum flexibility and convenience possible when working with the HP hose.	
Anbausatz Schlauchtrommel automatik				
Attachment kit automatic hose reel HDS M/S	121	2.110-011.0	Automatic hose reel as a complete attachment kit that's easy to mount. Suitable for HDS medium and super class. For maximum convenience when winding and unwinding the high-pressure hose.	
Attachment kit automatic hose reel holder HDS M/S	122	2.110-020.0	Holder includes connection material for installing an automatic hose reel to machines in the HDS Middle and Super classes.	
FACADE AND SOLAR PANEL CLEANING				
Brushes				
Drive for roller brush 500	123	4.762-584.0	Hydraulic drive for rotating roller brushes. For cleaning façades or solar power installations with our professional high-pressure cleaners. Installation on spray lance or telescopic lance.	
Splash guard for roller brush 500	124	4.762-621.0	Splash guard with velcro fastening for rotating roller brush. Clear view of the brush thanks to transparent film, with protection against splashes at the same time.	
Roller brush 500 soft	125	4.762-623.0	Soft brush attachment for use with hydraulic drive (4.762-584.0). Ideal for glass and solar power installation cleaning. Easy quick-change system and secure mounting on drive.	
Roller brush 500 medium	126	4.762-624.0	Medium-hard brush attachment for use with hydraulic drive (4.762-584.0). Suitable for sensitive façades, foils and fabrics. Easy and safe quick-change system.	

EQUIPMENT FOR HDS 7/10-4 M 1.077-901.0

137

138-139



140

				Т
		Order no.	Description	
FACADE AND SOLAR PANEL CLEANING				
Brushes		1		
Roller brush 500 hard	127	4.762-625.0	Hard brush attachment for use with hydraulic drive (4.762-584.0). For rough façades, stone and wooden patios. Safe and easy quick-change system.	
Brush hard	128	6.960-133.0	Brush with hard bristles for cleaning industry facades and floor coverings and removing coarse dirt. Simple installation on telescopic lances or high-pressure lances from Kärcher.	
Brush medium	129	6.960-134.0	Optimally cleans facades, roller shutters and textile fabrics: the brush with medium-hard bristles for fast and simple attachment to telescopic lances or high-pressure lances from Kärcher.	
Brush soft	130	6.960-135.0	For simple installation on telescopic lances or high-pressure lances from Kärcher: brush with soft bristles for deep cleaning of sensitive surfaces such as glass or solar systems.	
Telescopic		1		
TL low pressure adapter	131	4.580-097.0	TL low-pressure adapter comprising ball valve for tool-free installation on telescopic lances. Ideal for applications with rotating high-pressure brushes.	
Telescopic lance TL 7 F	132	4.762-609.0	Telescopic lance TL 7 F with up to 7 m reach made from robust and lightweight glass fibre. With practical quick-release fasteners for simple retraction and extension.	
Telescopic lance TL 7 H	133	4.762-610.0	Multifunctional hybrid telescopic lance TL 7 H made of rigid and lightweight carbon-glass fibre mix Telescopic thanks to quick-release fastenings. Up to 7 m reach.	. 🗆
Telescopic lance TL 10 H	134	4.762-611.0	Up to 10 m reach: hybrid telescopic lance TL 10 H. Comprising carbon-glass fibre mix and suitable for multifunctional use. Simple retraction and extension thanks to quick-release fasteners.	
Telescopic lance TL 10 C	135	4.762-612.0	Carbon fibre telescopic lance TL 10 C. With up to 10 m reach and practical quick-release fasteners. Multifunctional use for cleaning facades, windows or solar panels.	
Telescopic lance TL 14 C	136	4.762-613.0	Maximum rigidity with minimum weight: telescopic lance TL 14 C made from carbon fibre. Enormous reach of 14 m, multifunctional use and easy to use thanks to quick-release fasteners.	
TL high pressure adapter	137	4.775-154.0	TL high-pressure adapter, flexible high-pressure gun for high-pressure cleaning with telescopic lances. Ergonomic, easy to install, suitable for right- and left-handed individuals.	
WET BLASTING ATTACHMENT				
Wet blasting attachment (without nozzle)				
Wet blasting attachment with flow control (without nozzles)	138	4.115-000.0	Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet.	
Wet blasting attachment without flow control (nozzles not included)	139	4.115-006.0	Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet. Without flow control.	
Nozzle pack for wet blasting attachment			1	_
Nozzle pack TR wet jet set 0050	140	2.112-023.0	Nozzle kit with wet blasting nozzle and nozzle insert (type specific). For optimal Kärcher wet blasting attachment performance. Only in combination with wet blasting attachment .	

□ Available accessories.

136

HDS 7/10-4 M, 1.077-901.0, 2025-05-05

EQUIPMENT FOR HDS 7/10-4 M 1.077-901.0

141 142 142 142 142 142	,	43	$ \begin{array}{c} \begin{array}{c} \begin{array}{c} \begin{array}{c} \end{array}\\ \end{array}\\ \end{array}\\ \end{array}\\ \end{array}\\ \end{array}\\ \end{array}\\ \begin{array}{c} \end{array}\\ \end{array}\\ \end{array}\\ \end{array}\\ \begin{array}{c} \end{array}\\ \end{array}\\ \begin{array}{c} \end{array}\\ \end{array}\\ \end{array}\\ \begin{array}{c} \end{array}\\ \end{array}\\ \end{array}\\ \begin{array}{c} \end{array}\\ \end{array}\\ \begin{array}{c} \end{array}\\ \end{array}\\ \begin{array}{c} \end{array}\\ \end{array}\\ \end{array}$	ζ ζ
		Ourden and	Provide the	
WET BLASTING ATTACHMENT		Order no.	Description	
Boron carbide nozzle				
Boron carbide nozzle, for machines as of 1000 l/h	141	6.415-084.0	In addition to nozzle packs. Very wear-resistant nozzle with boron carbide chuck for continuous-duty operation.	
DRUM AND TANK CLEANING				
Barrel and tank cleaning				
Barrel cleaner BC 14/12	142	2.112-020.0	The barrel cleaner BC 14/12 is a spray unit for the internal cleaning of containers and drums – in particular oak barrels with a capacity between 225 and 600 liters.	
Nozzle kit for HKF 50 spray head (3.631-009.0		1		
Nozzle 090 for single nozzle operation HKF 50			Nozzle for single-nozzle operation	
Double handle for exact control of the spray head	144	2.863-036.0	Double handle. Precise control of the spray head	
Screw plug for using a spray head with one nozzle	145	5.411-061.0	Screw plug for using a spray head with one nozzle	
ADD-ON KITS				
Crane lifting kit Transport eyelet attachment kit	146	2.644-053.0	Robust transport eyelet attachment kit for the secure fixing of HDS Medium and Super Class	
Flame monitoring attachment kit			pressure washers during transport.	
Flame monitoring attachment kit ABS flame monitor for HDS M/S	147	2.641-796.0	More safety thanks to ABS HDS M/S flame monitoring system: A light sensor monitors the burner flame. The fuel supply cuts out automatically if the flame extinguishes.	
Accumulator kits Add-on accumulator for HDS M/S	148	2.641-803.0	The accumulator can be mounted on the HDS machine in order to dampen pressure surges, which	
Remote control set			conserves the machine's line system.	
	149	2.642-157.0	Remote control for the machines of the HDS Middle and Super class with the functions on/off, hot/cold water and cleaning agent on/off. For mounting to a wall.	
Coin-op remote control				_
Coin-op remote control	150	2.642-158.0	Retrofittable coin acceptor for machines in the HDS Middle and Super class for self-service operation. For installation on the machine.	
WATER CONNECTION				
Geka coupling				
With hose nozzle, R 3/4"	151	6.388-455.0	with hose liner	
With hose nozzle, R 1"	152		with hose barb	
Hose coupling	153	6.388-458.0	with female thread	
Suction filter	154	6 414 050 0	Cuitable for pende storage table or similar polyamide filter seeing staiplass storages at 200 mm	
Water filter	154	6.414-956.0	Suitable for ponds, storage tanks or similar, polyamide filter casing, stainless steel strainer, 800 µm mesh, R 3/4" and R 1" connection, without non-return valve	

EQUIPMENT FOR HDS 7/10-4 M 1.077-901.0















		Order no.	Description	
WATER CONNECTION		order no.		
Suction filter				
Suction filter with check valve	155	4.730-012.0	Brass suction filter suitable for ponds, storage tanks, etc. With check valve.	
Fine-mesh water filter				
Add-on kit water filter universal	156	2.637-020.0		
Fine-mesh water filter with adapter	157	4.730-102.0	Fine-mesh water filter, 125 μ m, max. temperature 50°C. Protects the high-pressure cleaner from dirt particles contained in the water. Water flow rate up to 1200 I/h. Connection 3/4", with adapter 1".	,
Fine-mesh water filter, 100 $\mu m,$ R 1"	158	2.638-270.0	Fine-mesh water filter, 100 μ m, max. temperature 60°C. Connects to high-pressure cleaner. Protects the high-pressure cleaner from dirt particles contained in the water. Water flow rate up to 1200 I/h. Connector 1".	ŝ 🗌
Water supply hose				
Water supply hose	159	4.440-038.0	NW 13 R1" / R 3/4", up to 30 °C	
	160	4.440-207.0	NW 19 R1" / R 3/4", up to 85 °C, for pick-up	
WASHING BRUSHES				
Push-on washing brush				
Push-on wash brush, M 18 \times 1.5	161	4.113-001.0	Push-on wash brush for universal use. Simply push on to lance. Connector: M 18 \times 1.6.	
Rotating washing brush				
Rotating wash brush for < 800 l/h machines, nylon bristles	162	4.113-004.0	The rotating wash brush gently removes fine dust and traffic film from all surfaces. Temperature resistant up to 60° C. (M 18 × 1.5, replaceable brush insert).	
Rotating wash brush for < 800 l/h machines, natural bristles	163	4.113-003.0	Driven by water stream. Gently removes fine dust and traffic film from any surface. Temperature resistant up to 60°C, M 18 × 1.5 (replaceable brush insert).	