

HD 13/18-4 SX PLUS

Super class cold water pressure washer for continuous operation in tough operating conditions. Like the HD 10/25-4 SX Plus model but with higher water flow and lower pressure. With built-in high-pressure hose reel.



Order no.

1.286-936.0

- Save energy and time: EASY!Force high-pressure guns and EASY!Lock quick-release locks.
- Water-cooled three-phase motor
- Outstanding cleaning performance

2	Technical data		
	EAN code		4054278171968
	Current type	Ph / V / Hz	3 / 400 / 50
	Flow Rate	l/h	650 - 1300
	Water feed temperature	°C	60
	Operating pressure	bar / MPa	30 - 180 / 3 - 18
	Max. Pressure	bar / MPa	198 / 19.8
	Power rating	kW	9.2
	Weight (with accessories)	kg	73.6
	Weight incl. packaging	kg	79.6
	Dimensions (L × W × H)	mm	560 × 500 × 1090

Trigger gun		EASY!Force Advanced
Trigger gun with soft grip		•
High-pressure hose	m	20
Spray lance	mm	1050
Power nozzle		•
Dirt Blaster spray lance		•
Integral high-pressure hose reel		
4-pole three-phase motor with air and water cooling		•
Pressure switch control		
Integrated fine mesh water filter		
Electronic motor protection system with LED display		•
Oil sight glass		•
Bypass detergent injector		
Servo Control		
Brass water inlet fitting		

Included in delivery.







Save energy and time: EASY!Force high-pressure guns and EASY!Lock quick-release locks.

- At last work without getting tired: the EASY!Force high-pressure gun.
- EASY!Lock quick-release locks: durable and robust. And five times faster than screws.



Proven Kärcher quality

- 4-pole water-cooled electric motor.
- Robust brass cylinder head and ceramic pistons.
- Reinforced, unbreakable plastic chassis.



Hose storage

- Supported on both sides; for 20 m high-pressure hose.
- Hose guide passes under the unit; high stability.
- For fast, convenient fitting and removal.

EQUIPMENT FOR HD 13/18-4 SX PLUS 1.286-936.0



Trigger guns				
EASY!Force Advanced	1	4.118-005.0	Effortless, not energy-sapping: the EASY!Force high-pressure gun uses the recoil force of the high-pressure jet to reduce the holding force for the operator to zero.	
Conversion kit 1 from high pressure hose	2	4.111-050.0	A conversion kit which enables secure connection from an M22 hose onto our innovative EASY!Force trigger gun. The kit includes the EASY!Force Trigger gun, adaptors and lance.	
Conversion kit 2 from device	3	4.111-051.0	Provides all the parts required to utilise our EASY!Force technology even on our non-Easy!Force machines. Including adaptors, lance, Easy!Force trigger gun and hose.	
Conversion kit 3 only EASY!Force	4	4.111-052.0	A conversion kit for the EASY!Force gun, which includes the correct adaptors to conncect to the M22 style lance and hose.	
Servo Control				
Servo Control, 1100 l/h -	5	4.118-009.0	Servo control for water flow and pressure control (> 1100 l/h) on the trigger gun.	
SPRAY LANCES				
Rotating spray lances				
Spray lance, 1050 mm, rotatable	6	4.112-000.0	1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	
LED nozzle light	7	2.680-002.0	LED work light for assembly on EASY!Force spray lances, providing a clear view in poor lighting conditions ensuring controlled cleaning results.	
Spray lance, 250 mm, rotatable	8	4.112-027.0	250 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	
Spray lance, 400 mm, rotatable	9	4.112-024.0	400 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	
Spray lance, 600 mm, rotatable	10	4.112-007.0	600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	
Spray lance, 840 mm, rotatable	11	4.112-006.0	850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	
Spray lance, 1550 mm, rotatable	12	4.112-018.0	1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	
Spray lance, 2050 mm, rotatable	13	4.112-021.0	2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	
Spray lance extender, 1000 mm	14	4.112-048.0	Spray lance extension with EASY!Lock connection. Length 1000 mm.	

■ Included in delivery. □ Available accessories.

EQUIPMENT FOR HD 13/18-4 SX PLUS 1.286-936.0



		Order no.	Description	
SPRAY LANCES				
Double lance				
Double lance, 960 mm	15	2.112-016.0	960 mm double lance for variable pressure adjustment on handle at full water flow rate. Suitable for agricultural use (e.g. stable cleaning).	
Angular spray lance				
WC and gutter lance	16	4.112-029.0	Stainless steel lance WC and gutter with nozzle insert. Specially shaped for effective and hygienic cleaning of gutters and toilets.	
Flexible spray lance				
Flexible lance, 1050 mm	17	4.112-035.0	1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters.	
High pressure articulated joint	18	4.112-057.0	For hard-to-reach areas: High-pressure articulated joint with infinite angle adjustment up to 120°. Simply attach directly to the spray lance of the pressure washer.	
Gutter cleaner				
Gutter cleaning lance	19	2.112-015.0	The lance is suited for cleaning of gutter systems. Because of the shape of the lance and the specia nozzle the gutter can be cleaned without removing the cover plates.	
Undercarriage spray lance				
Underbody lance	20	4.112-032.0	Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle.	
Additional handle			•	
Additional handle for EASY!Lock spray lances	21	4.321-380.0	Comfortable in every situation – the additional handle is easy to attach to the spray lance of our new EASY!Lock generation and makes work easier by allowing you to adjust your posture to suit the particular task.	
ROTARY NOZZLES (DIRT BLASTERS)				
Dirt blaster, large				
Dirt Blaster Nozzle, large, 070/080	22	4.114-030.0	The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C.	e 🔳
KÄRCHER POWER NOZZLE				
Power nozzle spray angle 25°				
Power Nozzle , 080	23	2.113-015.0	Fan jet nozzle for large-area coverage and stubborn dirt and stains.	
HP nozzle spray angle 0°				
Power Nozzle 0°, 080	24	2.113-038.0	High-pressure nozzle with powerful jet for extremely stubborn dirt.	
Power nozzle spray angle 15°			1	
Power Nozzle 15°, 080	25	2.113-051.0	Fan jet nozzle with 15° spray angle suitable for stubborn dirt.	
Power nozzle spray angle 40°		1		
Power Nozzle 40°, 080	26	2.113-057.0	Power nozzle with a 40° spray angle and fan jet, suitable for large areas and sensitive surfaces.	
HIGH-PRESSURE HOSES				<u>_</u>
Standard				
High-pressure hose, 20 m, 315 bar, 1 × EASY!Lock / 1 × AVS-hose reel connection	27	6.110-011.0	High-pressure hose with AVS hose reel connection and EASY!Lock hand screw connection.	
Standard with unions on both sides		1	1	
High-pressure hose, 10 m, 315 bar, 2 × EASY!Lock	28	6.110-031.0	10 m high-pressure hose (M 22 × 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN $8/155^{\circ}C/315$ bar.	
			1	

■ Included in delivery. □ Available accessories.

EQUIPMENT FOR HD 13/18-4 SX PLUS 1.286-936.0



				—
		Order no.	Description	
HIGH-PRESSURE HOSES				
Standard with unions on both sides				
High-pressure hose, 15 m, 315 bar	29	6.110-033.0	15 m high-pressure hose (M 22 × 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155 $^{\circ}$ C/315 bar.	
High-pressure hose, 20 m, 315 bar, 2 × EASY!Lock	30	6.110-032.0	20 m high-pressure hose (M 22 × 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN $8/155$ °C/315 bar.	
High-pressure hose, 15 m, 220 bar, 2 × EASY!Lock	31	6.110-042.0	15 m high-pressure hose M 22 \times 1.5) with kink protection and threaded couplings at both ends. Further data: DN 10/155°C/220 bar.	
High-pressure hose, 20 m, 220 bar, 2 × EASY!Lock	32	6.110-043.0	with union on both sides, M 22 \times 1.5 with anti-kink protection. NW 10/155°C/220 bar	
High-pressure hose, 25 m, 220 bar, 2 × EASY!Lock	33	6.110-044.0		
High-pressure hose, 40 m, 220 bar, 2 × EASY!Lock	34	6.110-045.0		
High-pressure hose, 15 m, 210 bar, 2 × EASY!Lock	35	6.110-059.0	High-pressure hose for water volumes greater than 1,800 l / h. With union on both sides. 2x M 22 × 1.5 with anti-kink protection.	
High-pressure hose, 40 m, 210 bar, 2 × EASY!Lock	36	6.110-060.0		
High-pressure hose, 10 m, 220 bar, 2 × EASY!Lock	37	6.110-041.0		
Longlife 400		•		
High-pressure hose Longlife, 20 m, 400 bar, 1 × EASY!Lock / 1 × AVS-hose reel connection	38	6.110-028.0	20 m high-pressure hose Longlife 400 (DN 8) with patented (rotating) AVS trigger gun connector and manual coupling. Two layer high-strength steel wire reinforced.	
Longlife food industry version				
High-pressure hose food grade, 20 m, 400 bar, 1 × EASY!Lock / 1 × AVS-hose reel connection	39	6.110-075.0		
INTERIOR CLEANING HEADS				
HKF 50				
HKF 50 P	40	3.631-008.0	Spray head driven by a compressed air motor for the industrial container cleaning Cleaning of small barrels (200 - 500 l)	
Spray head HKF 50, stainless steel	41	3.631-009.0		
MULTIPLE-JET NOZZLES				
Angle vario nozzle 0°-90°				
Angled Vario Nozzle, 080	42	4.113-006.0	Variable angle nozzle for spray angle adjustment from 0° to 90°. For easy adjustment to all kinds o soiling and surfaces.	f

EQUIPMENT FOR HD 13/18-4 SX PLUS 1.286-936.0

















		Order no.	Description	
NOZZLE UNION / SPACER		oraci no.		
Nozzle union				
Nozzle screws	43	4.112-011.0	Nozzle screws with protectors for high-pressure and power nozzles	
PIPE CLEANING				
Pipe cleaning hose, ID 6				
Hose assembly TR pipe cleaning DN6 max.2	44	6.110-046.0	The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	
Pipe cleaning hose, DN 6, 20 m, 220 bar	45	6.110-008.0	20 m flexible high-pressure hose (DN 6) for cleaning pipes up to 220 bar (threaded connection for R 1/8 nozzle).	
Hose assembly TR pipe cleaning DN6 max.2	46	6.110-047.0	The 30 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	
Pipe cleaning nozzle				
Dirt blaster pipe cleaning D21/060	47	4.765-002.0		
Dirt blaster pipe cleaning D21/090	48	4.765-003.0	jets ensure the necessary forward movement, as well as convenient handling.	
Dirt blaster pipe cleaning D30/060	49	4.765-005.0		
Dirt blaster pipe cleaning D30/090	50	4.765-010.0		
Nozzle pipe cleaning size 100	51	5.763-088.0	Pipe cleaning nozzle with 24 mm diameter. With 4 nozzles tilted back at a 30° angle.	
Pipe cleaning nozzle	52	5.763-019.0	16 mm pipe cleaning nozzle with internal thread. Various jet directions for	
	53	5.763-016.0	environmentally-friendly cleaning of blocked drains and pipes.	
	54	5.763-021.0	30 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes.	
Rotating pipe cleaning nozzle	55	6.415-440.0	Rotating pipe cleaning nozzle with internal thread and four rotating jets for environmentally-friendly cleaning of blocked drains and pipes.	
FLOOR AND HARD SURFACE CLEANER				
Hard Surface Cleaner FRV 30				
Add-on kit rubber lip	56	2.642-910.0	For smooth floors indoors. The squeegee increases the suction performance of the FRV 30 and minimises the amount of water remaining. This means the floor is dry in just a few minutes.	

EQUIPMENT FOR HD 13/18-4 SX PLUS 1.286-936.0

57, 65	58	5			
م م الم الم الم الم الم الم الم الم الم	66	6	7		
			Order no.	Description	
FLOOR AND HARD SURF	ACE CLEANER	L	0.00.00		
Hard Surface Cleaner FR	V 30				
Extension hose 5 m		57	4.440-939.0	5m extension hose for FRV 30. Connection sleeve included.	
Add-on kit hose attachm	nent	58	2.642-528.0	Suction cup for fixing the suction hose to smooth surfaces.	
Add on kit dirt tran		50	2642 5220	Calvanised steel busket for collecting searce dirt and for fiving the sustien base in outside areas	

Add-on kit hose attachment	58	2.642-528.0	Suction cup for fixing the suction hose to smooth surfaces.	
Add-on kit dirt trap	59	2.642-532.0	Galvanised steel bucket for collecting coarse dirt and for fixing the suction hose in outside areas.	
FRV 30	60	2.111-010.0	Surface cleaner with integrated waste water pick-up	
Hard surface cleaner FR 30 ME				
FR 30 ME surface cleaner	61	2.111-013.0	Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry.	
Hard Surface Cleaner FR 50				
FR 50 surface cleaner	62	2.111-023.0	Hot water resistant stainless steel surface cleaner with 500 mm working width. Ideal for large areas.With double ceramic bearings, push handle, non-marking swivel castors and detergent dosing system.	g
Machine-specific nozzle kit for FR				
Nozzle kit for FR, 1100 l/h - 1300 l/h	63	2.639-188.0	Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (1100 to 1300 l/h).	
Machine-specific nozzle kits for FRV		•		
Nozzle kit for FRV, 080	64	2.642-982.0	Machine-specific nozzle kit with Kärcher power nozzles and jet nozzle for FRV 30.	
Hard surface cleaner FRV 30 Me				
Extension hose FRV 30 Me and FRV 50 Me	65	4.441-040.0	5 m extension hose for FRV 30 Me. Includes connecting adapter.	
FRV 30 Me Surface Cleaner	66	2.111-012.0	Thanks to automatic suction of the dirty water, the stainless steel FRV 30 Me Surface Cleaner makes surface cleaning more efficient in both inside and outside areas. Hot water cleaning up to 85°C.	
Surface Cleaner FR 50 Me				
FRV 50 Me surface cleaner	67	2.111-024.0	Surface cleaning with automatic suction of the dirty water for very large surfaces. Hot water cleaning up to 85°C.	
FOAM SYSTEMS				
Cup foam lance				
Cup foam lance Basic 3, 900 l/h - 2500 l/h	68	4.112-055.0	For high-pressure cleaners with a flow rate of 900-2500 l/h: new, robust and very high-quality foam cup lance with outstanding foam quality while consuming half as much cleaning agent.	
1-litre cleaning agent container for cup foam lance basic	69	5.071-414.0		
1-litre cleaning agent container for cup foam lance advanced	70	6.414-050.0	Additional 1-litre cleaning agent container for quick replacement of the cleaning agent (for foam lance 2.112-017.0 and 2.112-018.0).	

EQUIPMENT FOR HD 13/18-4 SX PLUS 1.286-936.0



				٦
		Order no.	Description	_
FOAM SYSTEMS				
Cup foam lance		1		
Cup foam lance Advanced 3, 900 l/h - 2500 l/h	71	4.112-065.0		
Cup foam lance DUO Advanced 3, 900 I/h - 2500 I/h	72	4.112-069.0		
Inno Foam Set				
Inno foam kit with detergent injector	73	2.640-151.0	High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or	ļ
	74	2.112-000.0	disinfection.	
Easy Foam Set				
Easy Foam Set with RM injector	75	2.112-010.0	HP foam system for use with. HD/HDS units for cleaning and disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine specific nozzle kit has to be ordered separately.	
Nozzle kits for Inno/Easy Foam Set				
Nozzle kit 110 Inno/Easy set 1000 - 1300 I/h	76	2.640-689.0	Nozzle kit 110 contains Kärcher power nozzles and nozzle inserts. For Inn/Easy-Foam set 1000-1300 l/h. For optimal foam system performance.	
Nozzle kit 110 z. Inno/Easy set for HD 13/18	77	2.111-022.0	Optimal adaptation to different machine outputs for economic use.	
Foam nozzle mounting kit				
Foam nozzle kit	78	2.112-013.0	Foaming agent kit. The foam nozzle is ideal for use in sanitary areas and the food industry and wherever long application times are necessary.	
MIXERS AND INJECTORS				
HP detergent injector				
Detergent injector for high pressure	79	3.637-170.0	Cleaning agent dosage at high pressure 3 - 5 %	
Machine-specific nozzle kit with order no. 3.63	7-170)		_
Nozzle insert trapezoidal thread	80	4.769-013.0	For HD/HDS 1000 - 1200 l/h. Consists of nozzle insert + HP power nozzle + union	
Machine-specific nozzle kit with order no. 3.637-170.0 1000-1200 l/h l/h	81	4.769-048.0		
Nozzle insert with order no. 3.637-001				
High pressure for units rated 1100 l/h or more	82	4.769-002.0	For high pressure with machines above 1.100 l/h	
Low pressure for units rated 1100 l/h or more	83	4.769-006.0	For low pressure with machines above 1.100 l/h	-
QUICK CONNECT				
Quick-fitting pipe union coupler trapezo	84	2.115-000.0	For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit, suitable for trigger gun/spray lance interface. With M 22 × 1.5 internal thread.	
			1	_

EQUIPMENT FOR HD 13/18-4 SX PLUS 1.286-936.0



				-
		Order no.	Description	
QUICK CONNECT				
Quick-fitting pipe union plug nipple tra	85	2.115-001.0	Hardened stainless steel male coupling for quick coupling 2.115-000. With M 22 \times 1.5 external thread.	
DRUM AND TANK CLEANING				
Add-on kit mud sucker	86	2.641-798.0		C
OTHER HP ACCESSORIES				
Jet gun	87	2.869-067.0	Short set-up time, easy transport, instant switch off - the jet gun is the affordable cleaning method for all kinds of small to medium-sized areas. Adjustable pressure/water volume.	ı [
COUPLING PARTS				
Rotary coupling				
Rotary coupling	88	4.111-021.0	Kårcher rotary coupling prevents twisting and kinking of high-pressure hoses for ease of use. Connector Easy!Lock. With grip protection.	C
Connector				
Nozzle connector/screw connector	89	4.111-022.0	Nozzle connector/screw connector for connecting high-pressure nozzles and accessories to the high-pressure trigger gun (with nozzle connector). Connectors: 1x M 22 × 1.5 and 1x M 18 × 1.5.	
Y distributor	90	4.111-024.0	Offers the option to connect two spray units to the machine. Installation on the high pressure outlet.	
Short spray unit	91	4.111-038.0	For attaching high-pressure nozzles and accessory parts to HP trigger gun (with nozzle screws). Not compatible with triple nozzles.	t 🗆
Adapter EASY!Lock				
Adapter 1 M22AG-TR22AG	92	4.111-029.0	Adapter 1 to connect the old hose with the new hose	E
Adapter 2 M22IG-TR22AG	93	4.111-030.0	Adapter 2 to connect the old device with the new hose and the old gun with the new hose	C
Adapter 3 M22IG-TR22AG	94	4.111-031.0	Adapter 3 to connect the old gun with the new spray lance and new servo regulator	E
Adapter M22 – Swivel	95	4.111-032.0	M22 × 1,5female and swivel connection. For extension of high-pressure hoses with AVS connection or for usage of the telescopic lance with a high-pressure hose with AVS connection.	۱C
Adapter 5 TR22IG-M22AG	96	4.111-033.0	Adapter 5 to connect the new gun with the old spray lance and new servo regulator with the old spray lance	C
Adapter 6 TR22IG-M22AG	97	4.111-034.0	Adapter 6 to connect the new device with the old hose and the old hose with the new gun	E
Adapter 7 M18IG-TR20AG	98	4.111-035.0	Adapter 7 to connect the old spray lance with the new nozzle	E

EQUIPMENT FOR HD 13/18-4 SX PLUS 1.286-936.0

99 100 100 108		01	$\begin{bmatrix} 1 \\ 103 \end{bmatrix} \begin{bmatrix} 104 \\ 104 \end{bmatrix} \begin{bmatrix} 105 \\ 105 \end{bmatrix} \begin{bmatrix} 105 \\ 106 \end{bmatrix} \begin{bmatrix} 105 \\ 106 \end{bmatrix}$	
		Order pe	Description	
COUPLING PARTS		Order no.	Description	<u> </u>
Adapter EASY!Lock				
Adapter 8 TR20IG-M18AG	99	4.111-036.0	Adapter 8 to connect the new spray lance with the old nozzle	
Coupler -2xM22x1.5	100	4.111-037.0		
	100		Connector: 2x M 22 × 1.5 m.	
ADAPTER for replacement TR22IG-M22AG Er	101	4.111-046.0	Rotatable adapter for connecting EASY!Force high-pressure gun and high-pressure hoses with M 22x1.5 connection	
HOSE REELS				
Automatic, self-winding hose reels				
Automatic plastic hose reel incl. high-pressure hose, 15 m	102	2.639-257.0		
Automatic hose reel, powder-coated steel / plastic, 20 m	103	6.392-074.0	Automatic hose reel for 20 m high-pressure hose. The console is made from powder-coated steel, the drum is made from plastic.	
Automatic stainless steel / synthetic material hose drum, 20 m	104	6.392-083.0	Automatic hose reel for 20 m high-pressure hose. The console consists of stainless steel, the drum is made from plastic.	
Automatic hose reel, coated, 20 m	105	6.392-106.0	Automatic hose reel of durable plastic. Painted steel bracket. Suitable for 20 m high-pressure hose.	
Hose reel, automatic, basalt grey-coated, 20 m	106	6.392-105.0	Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses.	
Automatic hose reel, stainless steel, includes swivel holder, 20 m	107	6.392-076.0	Automatic stainless steel hose reel. With swivel holder. Suitable for 20 m high-pressure hose.	
Automatic stainless steel hose reel, 40 m	108	6.392-442.0	Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses. Compatible high-pressure hose, e.g. order no. 6.110-076.0 (ID 8, 40 m, 400 bar, 1x hose reel connection attachment kit).	
Powder-coated swivel holder	109	2.639-931.0	Swivel holder for automatic hose reel wall mounting. For maximum action radius and flexibility of high-pressure hose. Rotatable 120°. Galvanised steel.	
Stainless steel swivel holder	110	2.641-867.0	Swivelling wall bracket made of high-grade steel (for 2.641-866). This makes maximum flexibility and convenience possible when working with the HP hose.	
FACADE AND SOLAR PANEL CLEANING				
Brushes				
iSolar 800 Advanced	111	6.368-095.0	For water flow rates of 1,100-1,300 l/h: The 800-mm iSolar water-driven brush head with two contra-rotating disc brushes and flexible angle joint ensures that photovoltaic systems are given an even clean.	
iSolar 400 Advanced	112	6.368-093.0	The iSolar 400 water-driven disc brush (working width 400 mm) is designed for water flow rates of 1,100-1,300 l/h. For small to medium-sized photovoltaic systems (including elevated systems).	
Available accessories.				

EQUIPMENT FOR HD 13/18-4 SX PLUS 1.286-936.0






125

115


126-128









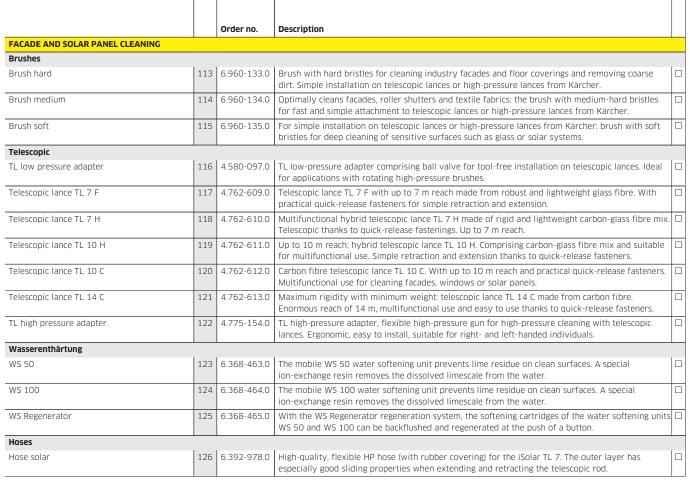

EQUIPMENT FOR HD 13/18-4 SX PLUS 1.286-936.0

130

















		Order no.	Description	
FACADE AND SOLAR PANEL CLEANING				
Hoses				
Hose solar	127	6.392-977.0	High-quality, flexible HP hose (with rubber covering) for the iSolar TL 10. The outer layer has especially good sliding properties when extending and retracting the telescopic rod.	
	128	6.392-976.0	High-quality, flexible HP hose (with rubber covering) for the iSolar TL 14. The outer layer has especially good sliding properties when extending and retracting the telescopic rod.	
Attachment kits and adapters				
Case sheet steel	129	6.988-152.0	Certified personal security system for rooftop work. Contents: Travelling fall arrestor with shock absorber and 15 m kernmantle rope, harness, anchoring sling and sheet steel case.	
WET BLASTING ATTACHMENT				
Nozzle pack for wet blasting attachment				
Nozzle pack TR wet jet set 0080	130	2.112-029.0	Consisting of wet jet nozzle and nozzle insert - only for use in combination with wet jet unit 4.115-000.0 4.115-006.0.	
Boron carbide nozzle				
Boron carbide nozzle, for machines as of 1000 l/h	131	6.415-083.0	In addition to nozzle packs. Very wear-resistant nozzle with boron carbide chuck for continuous-duty operation.	
DRUM AND TANK CLEANING				
Barrel and tank cleaning				
Barrel cleaner BC 14/12	132	2.112-020.0	The barrel cleaner BC 14/12 is a spray unit for the internal cleaning of containers and drums - in particular oak barrels with a capacity between 225 and 600 liters.	
HKF 50 spray head, brass				
HKF 50 spray head , brass	133	3.631-039.0	Interior cleaning head for barrels and containers with bungholes of 50 mm and more.	
HKF 50 spray head, brass	134	3.631-058.0		
Nozzle kit for HKF 50 spray head (3.631-009.0	/ 3.63	31-039.0)		
Nozzle 045 for dual nozzle operation HKF 50 $$	135	6.415-446.0	Nozzle for dual-nozzle operation	
Nozzle 090 for single nozzle operation HKF 50	136	6.415-447.0	Nozzle for single-nozzle operation	
Double handle for exact control of the spray head	137	2.863-036.0	Double handle. Precise control of the spray head	
Screw plug for using a spray head with one nozzle	138	5.411-061.0	Screw plug for using a spray head with one nozzle	
WATER CONNECTION				
Geka coupling				
With hose nozzle, R 3/4"	139	6.388-455.0	with hose liner	
With hose nozzle, R 1"	140	6.388-465.0	with hose barb	
			r	_

EQUIPMENT FOR HD 13/18-4 SX PLUS 1.286-936.0





151















		Order no.	Description	
WATER CONNECTION	1			
Geka coupling				
Hose coupling	141	6.388-458.0	with female thread	
Suction filter				
Water filter	142	6.414-956.0	Suitable for ponds, storage tanks or similar, polyamide filter casing, stainless steel strainer, 800 µm mesh, R 3/4" and R 1" connection, without non-return valve	
Suction filter with check valve	143	4.730-012.0	Brass suction filter suitable for ponds, storage tanks, etc. With check valve.	
Fine-mesh water filter				
Add-on kit water filter universal	144	2.637-020.0		
Fine-mesh water filter with adapter	145	4.730-102.0	Fine-mesh water filter, 125μ m, max. temperature 50°C. Protects the high-pressure cleaner from dirt particles contained in the water. Water flow rate up to 1200 I/h. Connection 3/4", with adapter 1".	·, □
Fine-mesh water filter, 100 $\mu m,$ R 1"	146	2.638-270.0	Fine-mesh water filter, 100 μ m, max. temperature 60°C. Connects to high-pressure cleaner. Protects the high-pressure cleaner from dirt particles contained in the water. Water flow rate up to 1200 I/h. Connector 1".	s 🗆
Water supply hose				
Water supply hose	147	4.440-207.0	NW 19 R1" / R 3/4", up to 85 °C, for pick-up	
	148	4.440-270.0	NW 19 R1" / R1", up to 85 °C	
Backflow check valve				
Backflow preventer	149	2.641-374.0	To prevent detergent getting into the drinking water cycle in case of inlet at low-pressure. – hot water resistant up to 80 $^\circ$ C – tested according to IEC 60335-2-79 – integrated leakage protection	
WASHING BRUSHES				
Push-on washing brush				
Push-on wash brush, M 18 \times 1.5	150	4.113-001.0	Push-on wash brush for universal use. Simply push on to lance. Connector: M 18 \times 1.6.	
Rotating washing brush				
Rotating wash brush for > 800 l/h machines, nylon bristles	151	4.113-002.0	Driven by water stream. Gently removes fine dust and traffic film from any surface. Temperature resistant up to 60° C, M 18 × 1.5 (replaceable brush insert).	
Rotating wash brush for > 800 l/h machines, natural bristles	152	4.113-005.0		