

HDS 13/35 DE TR1

The HDS 13/35 trailer can be used self-sufficiently and reaches pressures of 350 bar. It is the perfect solution for hot water high-pressure cleaning in the municipal sector, at construction sites and in industry.



Order no. 1.524-521.2

- Automatic speed reduction
- Speed regulation
- Stationary and mobile versions available

Technical data


Drive type		Diesel
Motor manufacturer		Yanmar
Power Rating	kW / hp	19 / 26
Flow Rate	l/h	650 - 1300
Pressure	bar / MPa	100 - 350 / 10 - 35
Heating oil consumption, ecoefficiency	kg/h	9.3
Dimensions (L × W × H)	mm	3646 × 1747 × 1735

This device does not require instruction.

Equipment

Trigger gun		Industry
High-pressure hose	m	30
Spray lance	mm	700
Power nozzle		■

■ included in delivery.

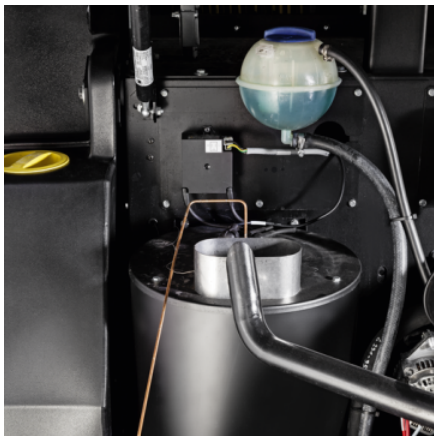

Maximum efficiency

- Highly efficient burner technology.
- Heat recovery through use of waste heat from the engine.
- Environmentally-friendly operation and low operating costs thanks to Kärcher's ecoefficiency mode.



Simple operation

- The machine is easy to operate using a central selector switch.
- Two optional hose reels in operating area allow easy set-up and dismantling.
- Safe and ample storage for protective gear, accessories and cleaning agents.



Self-sufficient application

- Large 500 l water tank for up to 30-minute cleaning applications with full water performance.
- 100-litre diesel tank: ideal for long periods of use.
- Powerful Yanmar diesel engines allow the machine to be used independently of any power source.

EQUIPMENT FOR HDS 13/35 DE TR1 1.524-521.2



		Order no.	Description	
COUPLING PARTS				
Coupling				
Coupler -2xM22x1,5	1	4.403-002.0	Brass double connector for connecting and extending high-pressure hoses. With rubber protection. Connector: 2x M 22 x 1.5 m.	<input type="checkbox"/>
KITS				
Fleet mounting kit				
Add-on kit	2	2.644-391.0		<input type="checkbox"/>
COLD WATER CAGE MACHINES				
High-pressure hoses				
Pressure hose, 3 m, 640 bar, M22 x 1,5	3	6.391-856.0	650 bar, M 22 x 1,5.	<input type="checkbox"/>
Pressure hose, 10 m, 640 bar, M22 x 1,5	4	6.391-848.0	640 bar, M 22 x 1,5	<input type="checkbox"/>
Pressure hose, 20 m, 640 bar, M22 x 1,5	5	6.391-857.0	650 bar, M 22 x 1,5.	<input type="checkbox"/>
Pressure hose, 10 m, 620 bar, M22 x 1,5	6	6.391-846.0	650 bar, M 22 x 1,5	<input type="checkbox"/>
Pressure hose, 20 m, 620 bar, M22 x 1,5	7	6.391-847.0	650 bar, M 22 x 1,5.	<input type="checkbox"/>
Pressure hose, 30 m, 620 bar, M22 x 1,5	8	6.391-019.0	Durable, abrasion-resistant and flexible multi-layer steel-reinforced hose with connection size M 22 x 1.5. Suitable for up to 620 bar working pressure.	<input type="checkbox"/>
Couplings and connectors				
Coupling	9	4.403-004.0	For connecting and extending HP hoses. Connection 2 x M22 x 1.5. Brass with rubber protection.	<input type="checkbox"/>
Lances				
Kärcher industry gun	10	4.775-824.0	650 bar - industrial spray gun with optimised flow. Robustness and durability for professional use. Food-safe and saltwater-resistant materials. Connector for HP hoses M 22 x 1.5.	<input type="checkbox"/>
Shoulder support	11	2.639-251.0	Sturdy shoulder support that must be used from a recoil force of more than 150 N. Fits all Kärcher industrial lances.	<input type="checkbox"/>
Jet tube				
Spray lance	12	4.760-679.0	With nozzle holder.	<input type="checkbox"/>
	13	4.760-653.0		<input type="checkbox"/>
Jet pipe complete 1550 mm 65 MPa	14	4.760-675.3		<input type="checkbox"/>

■ Included in delivery. □ Available accessories.


EQUIPMENT FOR HDS 13/35 DE TR1 1.524-521.2



		Order no.	Description	
COLD WATER CAGE MACHINES				
Jet tube				
Spray lance	15	4.760-677.0	With nozzle holder.	<input type="checkbox"/>
Pipe cleaning				
Foot valve for pipe cleaning	16	6.470-223.0	Foot valve for convenient and safe use of accessories for effective pipe cleaning.	<input type="checkbox"/>
Pipe cleaning nozzle standard 050 50MPa	17	4.765-012.0		<input type="checkbox"/>
Pipe cleaning nozzle Four 050 50MPa	18	4.765-016.0		<input type="checkbox"/>
Pipe cleaning nozzle, Rotor	19	5.763-092.0	For pipe cleaning hoses with G1/4" threaded connection: Rotor pipe cleaning nozzle. Nozzle configuration: 3x backward.	<input type="checkbox"/>
Pipe cleaning hose	20	6.392-401.0	Flexible pressure hose (DN 8) for thorough pipe cleaning. 10 m long. Threaded connection for G1/4" nozzle.	<input type="checkbox"/>
	21	6.392-402.0	Flexible pressure hose (DN 8) for thorough pipe cleaning. With threaded connection for G1/4" nozzle and 20 m long.	<input type="checkbox"/>
	22	6.392-403.0	For through pipe cleaning: flexible, 30 m long pressure hose with threaded connection for G1/4" nozzle.	<input type="checkbox"/>
Surface Cleaner				
FRI 50 Me 50 MPa	23	2.643-577.0	Surface cleaner for efficient cleaning of surfaces up to 500 bar and hot water cleaning up to 100°C. 4 convenient steering rollers. Specific nozzle kits must be ordered separately.	<input type="checkbox"/>
Nozzle pack 025 FRI 50	24	6.415-045.0	Nozzle kit specifically for FRI 50 Me Surface Cleaner. Nozzle size: 025.	<input type="checkbox"/>
Abrasive blaster				
Required adapter for abrasive blasters	25	5.401-325.0	M 20 × 1 IG to 9/16" UNF AG.	<input type="checkbox"/>
Abrasive blaster, incl. 3 × 0.7 nozzle	26	9.872-435.0	Abrasive spray head with nozzle size 3 × 0.7 mm for wet sand blasting. Only includes spray head. Without hose and lance.	<input type="checkbox"/>
Replacement nozzle for abrasive blaster	27	6.025-346.0	Replacement nozzle for abrasive spray head made from boron carbide. Colour blue.	<input type="checkbox"/>
F98 nozzle kit, D 0.70 mm	28	9.886-551.0	For wet sand blasting: three-nozzle kit for abrasive spray head. Nozzle size 0.7 mm.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories.

EQUIPMENT FOR HDS 13/35 DE TR1 1.524-521.2

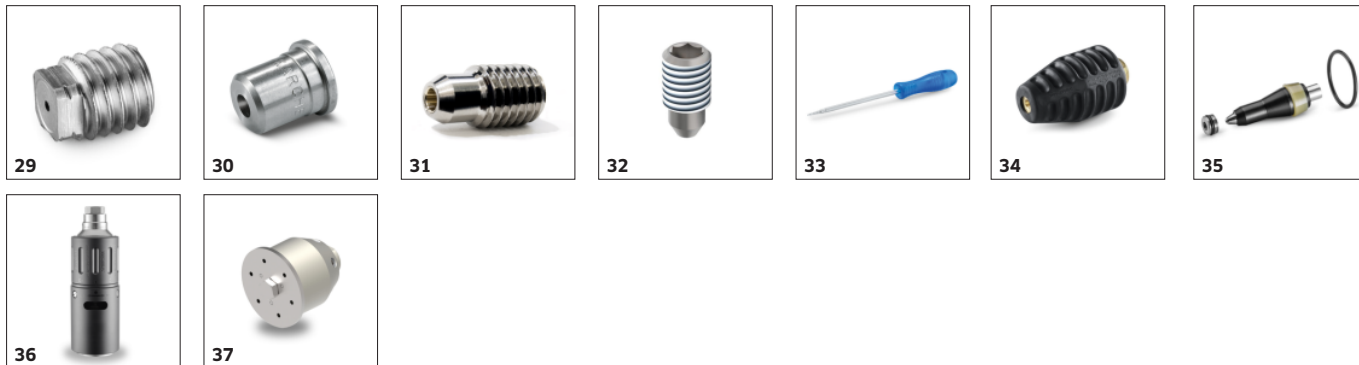

		Order no.	Description	
COLD WATER CAGE MACHINES				
Abrasive blaster				
F98 nozzle for abrasive blaster	29	6.025-255.0	Nozzle (nozzle size 0.7 mm) for abrasive spray head for wet sand blasting.	<input type="checkbox"/>
NOZZLES				
Power nozzles				
Flat jet nozzle, 15051	30	5.765-190.0	15°, 350 bar, 1,300 l/h (HDS trailer).	<input type="checkbox"/>
Screw nozzle				
Dummy nozzle F21	31	6.025-237.0	F21 screw-on dummy nozzle for working pressures of up to 3000 bar.	<input type="checkbox"/>
Round jet nozzle F21, Saphir, 0,9 mm	32	9.886-216.0	F21 screw-on sapphire round jet nozzle, 0.90 mm diameter, suitable for working pressures of up to 3000 bar.	<input type="checkbox"/>
ROTARY NOZZLES				
Single-jet rotary nozzles				
Tool for changing rotor seat	33	6.025-233.0	For single-jet rotary nozzles.	<input type="checkbox"/>
Rotary jet, 049, 1.35 mm	34	4.767-173.0	350 bar, 1.35 mm, 1,300 l/h, M 20 × 1, brass.	<input type="checkbox"/>
Power rotary jet repair kit F7	35	6.025-436.0	Repair kit for power rotary jet for 350 bar working pressure and 1,300 l/h water flow rate. Order No. 6.415-914.0. Includes rotor, seat and O-ring (28 × 2).	<input type="checkbox"/>
Multi-jet rotary nozzles				
Nozzle body	36	9.917-677.0		<input type="checkbox"/>
Nozzle carrier head TD09	37	9.899-828.0	Nozzle holder for F21 nozzle. Suitable for working pressures of up to 3000 bar. 35° spray angle, includes guard and flow conditioner.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories.