

HD 7/12-4 M ST

A stand-alone pump unit for simple stationary and space-saving wall-mounted operation. A 3-point support on the back enables vertical or horizontal mounting.











Order no.

1.524-937.0

- Robust 4-pole low-speed AC motor
- Save time and energy: EASY!Force high-pressure gun and EASY!Lock quick-release fasteners
- Automatic pressure relief and up to 20 percent higher energy efficiency

| Technical data | | |
|---------------------------|-------------|-----------------|
| EAN code | | 4054278504926 |
| Current type | Ph / V / Hz | 1 / 240 / 50 |
| Flow Rate | l/h | 700 |
| Water feed temperature | °C | 60 |
| Operating pressure | / MPa | 120 / 12 |
| Max. Pressure | bar / MPa | 180 / 18 |
| Power rating | kW | 3.1 |
| Power cable | m | 5 |
| Water feed | | 3/4" |
| Weight (with accessories) | kg | 30.5 |
| Weight incl. packaging | kg | 33 |
| Dimensions (L × W × H) | mm | 290 × 300 × 565 |

Equipment Pressure switch control Included in delivery.







High-quality equipment

- Automatic pressure relief for protecting the components extends their service life.
- Powerful, 2-pole, air-cooled electric motor.
- High-quality brass cylinder head.



Flexible operation


Designed for upright and horizontal operation.



Prepared for stationary operation

- Simple and robust 3-point attachment for wall mounting on the rear of unit.
- Space-saving, compact design.
- Integrated storage options reduce the set-up times.

EQUIPMENT FOR HD 7/12-4 M ST 1.524-937.0

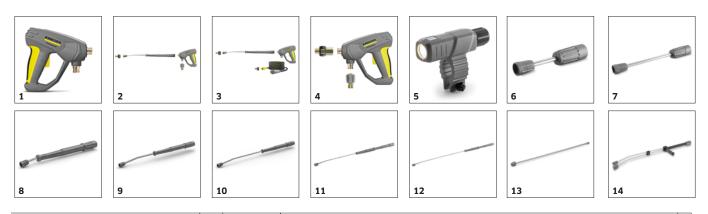

| | | Order no. | Description | |
|--|----|-------------|--|--|
| TRIGGER GUNS | | | | |
| EASY!Force Advanced | 1 | 4.118-005.0 | Effortless, not energy-sapping: the EASY!Force high-pressure gun uses the recoil force of the high-pressure jet to reduce the holding force for the operator to zero. | |
| EASY!Force conversion kit 1 - from high-pressure hose | 2 | 4.111-050.0 | For retrofitting Kårcher high-pressure cleaners with existing high-pressure hose: EASY!Force conversion kit 1 with EASY!Force high-pressure gun, spray lance and all adapters through to the nozzle. | |
| EASY!Force conversion kit 2 - from machine | 3 | 4.111-051.0 | Developed for retrofitting existing high-pressure cleaners from Kärcher: EASY!Force conversion kit 2 with EASY!Force high-pressure gun, spray lance, high-pressure hose and necessary adapters. | |
| EASY!Force conversion kit 3 - high-pressure gun | 4 | 4.111-052.0 | Compatible with existing high-pressure hose and spray lance: EASY!Force conversion kit 3, incl. EASY!Force trigger gun and all necessary adapters for upgrading your high-pressure cleaner. | |
| SPRAY LANCES | | | | |
| Rotating spray lances | | | | |
| LED nozzle light | 5 | 2.680-002.0 | Bright, lightweight LED work light for direct mounting on spray lance of EASY!Force high-pressure gun. Better view in unfavourable lighting conditions for up to 5 working hours. | |
| Spray lance, 250 mm, rotatable | 6 | 4.112-027.0 | Spray lance, 250 mm, rotatable, ergonomic | |
| Spray lance, 400 mm, rotatable | 7 | 4.112-024.0 | Spray lance, 400 mm, rotatable, ergonomic | |
| Spray lance, 600 mm, rotatable | 8 | 4.112-007.0 | 600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure. | |
| Spray lance, 840 mm, rotatable | 9 | 4.112-006.0 | 850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure. | |
| Spray lance, 1050 mm, rotatable | 10 | 4.112-000.0 | 1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure. | |
| Spray lance, 1550 mm, rotatable | 11 | 4.112-018.0 | 1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure. | |
| Spray lance, 2050 mm, rotatable | 12 | 4.112-021.0 | 2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure. | |
| Spray lance extender, 1000 mm | 13 | 4.112-048.0 | Spray lance extension with EASY!Lock connection. Length 1000 mm. | |
| Double lance | | ı | | |
| Double lance, 960 mm | 14 | 2.112-016.0 | 960 mm double lance for variable pressure adjustment on handle at full water flow rate. Suitable for agricultural use (e.g. stable cleaning). | |

■ Included in delivery. □ Available accessories.

EQUIPMENT FOR HD 7/12-4 M ST 1.524-937.0



| | | Order no. | Description |
|--|----|-------------|---|
| SPRAY LANCES | | | |
| Angular spray lance | | | |
| WC and gutter lance | 15 | 4.112-029.0 | Stainless steel lance WC and gutter with nozzle insert. Specially shaped for effective and hygienic cleaning of gutters and toilets. |
| Flexible spray lance | | | |
| Flexible lance, 1050 mm | 16 | 4.112-035.0 | 1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters. $\hfill\square$ |
| High pressure articulated joint | 17 | 4.112-057.0 | For hard-to-reach areas: High-pressure articulated joint with infinite angle adjustment up to 120°. Simply attach directly to the spray lance of the pressure washer. |
| Gutter cleaner | | | |
| Gutter cleaning lance | 18 | 2.112-015.0 | The lance is suited for cleaning of gutter systems. Because of the shape of the lance and the special nozzle the gutter can be cleaned without removing the cover plates. |
| Undercarriage spray lance | | | |
| Underbody lance | 19 | 4.112-032.0 | Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle. |
| Additional handle | | | |
| Additional handle for EASY!Lock spray lances | 20 | 4.321-380.0 | Comfortable in every situation – the additional handle is easy to attach to the spray lance of our new EASY!Lock generation and makes work easier by allowing you to adjust your posture to suit the particular task. |
| ROTARY NOZZLES (DIRT BLASTERS) | | | |
| Dirt Blaster, small | | | |
| Dirt blaster, small, 045 | 21 | 4.114-021.0 | Up to 50% higher cleaning and area performance than its predecessor: with the new performance dirt blaster (nozzle size 045), power losses have been minimised and the spray quality maximised. |
| Dirt blaster, large | | | |
| Dirt blaster Vibrasoft, 050 | 22 | 4.114-066.0 | Vibrasoft rotary nozzle with rotating point jet for ten times greater cleaning performance. Durable dirt blaster thanks to ceramic nozzle. Reduces vibrations by up to 30% for maximum ergonomics. |
| Dirt blaster, large, 045 | 23 | 4.114-042.0 | The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C. |
| MULTIPLE-JET NOZZLES | | | |
| Triple nozzles | | | |
| Triple nozzle, 045 | 24 | 4.117-036.0 | Triple nozzle with manual nozzle changeover. Convenient spray adjustment. For machines with an injector, the low-pressure flat stream is useful for cleaning agent suction and application. |
| Angle vario nozzle 0°-90° | | | |
| Angled Vario nozzle, 050 | 25 | 4.113-007.0 | Variable angle nozzle for spray angle adjustment from 0° to 90°. For easy adjustment to all kinds of \Box soiling and surfaces. |
| KÄRCHER POWER NOZZLE | | | |
| HP nozzle spray angle 0° | | | |
| Power nozzle 0°, 045 | 26 | 2.113-033.0 | High-pressure nozzle with powerful jet for extremely stubborn dirt. $\hfill \square$ |
| Power nozzle spray angle 15° | | 1 | |
| Power nozzle 15°, 045 | 27 | 2.113-046.0 | Fan jet nozzle with 15° spray angle suitable for stubborn dirt. |
| Power nozzle spray angle 25° | | 1 | <u> </u> |
| Power nozzle 25°, 045 | 28 | 2.113-022.0 | Fan jet nozzle with 25° spray angle, suitable for large areas and removing stubborn dirt and stains. \Box |

 \blacksquare Included in delivery. $\hfill\square$ Available accessories.

EQUIPMENT FOR HD 7/12-4 M ST 1.524-937.0

37

36

38, 46



40, 42-45

39, 41

| | | Order no. | Description | |
|--|----|-------------|--|-----|
| KÄRCHER POWER NOZZLE | | | | |
| Power nozzle spray angle 40° | | | | |
| Power Nozzle 40°, 045 | 29 | 2.113-053.0 | Power nozzle with a 40° spray angle and fan jet, suitable for large areas and sensitive surfaces. | |
| ECO!BOOSTER | | | | |
| HydroBooster JET TR 045 Professional | 30 | 2.113-087.0 | | |
| QUICK CONNECT | | | | |
| Quick-fitting pipe union coupler trapezo | 31 | 2.115-000.0 | For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit, suitable for trigger gun/spray lance interface. With M 22 \times 1.5 internal thread. | |
| Quick-fitting pipe union plug nipple tra | 32 | 2.115-001.0 | Hardened stainless steel male coupling for quick coupling 2.115-000. With M 22 \times 1.5 external thread. | |
| DRUM AND TANK CLEANING | | | | |
| Add-on kit mud sucker | 33 | 2.641-798.0 | | |
| OTHER HP ACCESSORIES | | | | |
| Starting current limiter | 34 | 2.637-495.0 | Reduces starting current in single-phase supply and protects line fuse. | |
| Add-on kit coin acceptor | 35 | 2.644-029.0 | Coin remote control with electronic coin acceptor for connecting a high-pressure cleaner as a pre-wash device. Please have the power outlet and cable provided on site. | |
| Jet gun | 36 | 2.869-067.0 | Short set-up time, easy transport, instant switch off - the jet gun is the affordable cleaning method for all kinds of small to medium-sized areas. Adjustable pressure/water volume. | |
| NOZZLE UNION / SPACER | | | | |
| Nozzle union | | | | |
| Nozzle screws | 37 | 4.112-011.0 | Nozzle screws with protectors for high-pressure and power nozzles | |
| HIGH-PRESSURE HOSES | | | | |
| Standard with unions on both sides | | | | |
| High-pressure hose, 10 m, DN 10, 220 bar, 2 × EASY!Lock | 38 | 6.110-041.0 | | |
| High-pressure hose, 10 m, DN 6, 250 bar, | 39 | 6.110-034.0 | 10 m high-pressure hose (M 22 \times 1.5) with kink protection. With patented rotating AVS trigger gun | |
| 2 × EASY!Lock | 40 | 6.110-035.0 | connector and manual coupling. Further data: DN 6/155°C/250 bar. | |
| High-pressure hose, 10 m, DN 6, 300 bar, 2 × EASY!Lock | 41 | 6.110-056.0 | With patented AVS connection in the trigger gun (pivot-mounted) and hand screw union. M 22×1.5 with anti-kink protection. NW 6/155°C/300 bar | 5 0 |
| High-pressure hose, 10 m, DN 8, 315 bar, 2 × EASY!Lock | 42 | 6.110-031.0 | 10 m high-pressure hose (M 22 × 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN $8/155^{\circ}C/315$ bar. | |

■ Included in delivery. □ Available accessories.

HD 7/12-4 M St, 1.524-937.0, 2024-04-29

EQUIPMENT FOR HD 7/12-4 M ST 1.524-937.0







| | | Order no. | Description | |
|---|----|-------------|---|--|
| HIGH-PRESSURE HOSES | | | | |
| Standard with unions on both sides | | | | |
| High-pressure hose, 15 m, DN 8, 315 bar, 2 × EASY!Lock | 43 | 6.110-030.0 | 15 m high-pressure hose (M 22 × 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN $8/155$ °C/315 bar. | |
| High-pressure hose, 20 m, DN 8, 315 bar, 2 × EASY!Lock | 44 | 6.110-032.0 | 20 m high-pressure hose (M 22 × 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar. | |
| High-pressure hose, 30 m, DN 8, 315 bar, 2 × EASY!Lock | 45 | 6.110-014.0 | With rotary coupling, 2 × M 22 × 1.5 | |
| High-pressure hose, 15 m, DN 10, 220 bar, 2 × EASY!Lock | 46 | 6.110-042.0 | 15 m high-pressure hose M 22 × 1.5) with kink protection and threaded couplings at both ends. Further data: DN 10/155°C/220 bar. | |
| High-pressure hose, 20 m, DN 10, 220 bar, 2 × EASY!Lock | 47 | 6.110-043.0 | with union on both sides, M 22 \times 1.5 with anti-kink protection. NW 10/155°C/220 bar | |
| High-pressure hose, 25 m, DN 10, 220 bar, 2 × EASY!Lock | 48 | 6.110-044.0 | | |
| High-pressure hose, 40 m, DN 10, 220 bar, 2 × EASY!Lock | 49 | 6.110-045.0 | | |
| High-pressure hose, 15 m, DN 12, 210 bar, 2 × EASY!Lock | 50 | 6.110-059.0 | High-pressure hose for water volumes greater than 1,800 l / h. With union on both sides. 2x M 22 × 1.5 with anti-kink protection. | |
| High-pressure hose, 40 m, DN 12, 210 bar, 2 × EASY!Lock | 51 | 6.110-060.0 | | |
| Longlife 400 with unions on both sides | | | | |
| High-pressure hose Longlife, 1,5 m, DN 8, 400 bar, 2 × EASY!Lock | 52 | 6.110-024.0 | 1.5 m high-pressure hose (DN 8, M 22×1.5) with kink protection and connectors at both ends. For connecting to hose reels with appropriate connector (M 22×1.5). | |
| High-pressure hose Longlife, 1,5 m, DN 8, 400 bar, 1 × EASY!Lock / 1 × M22 × 1.5 | 53 | 6.110-069.0 | High-pressure hose (ID 8) with double steel reinforcement, 1.5 m long, suitable for up to 400 bar pressure. Connectors: M 22 × 1.5, quick and convenient EASY!Lock hand screw connection. | |
| High-pressure hose Longlife, 10 m, DN 8, 400 bar, 2 × EASY!Lock | 54 | 6.110-038.0 | Durable, 10 m long high-pressure hose (ID 8) with double steel reinforcement and EASY!Lock hand screw connection at both ends and ANTI!Twist. Approved for 400 bar pressure. | |
| High-pressure hose Longlife, 30 m, DN 8, 400 bar, 2 × EASY!Lock | 55 | 6.110-023.0 | With rotary coupling, 2 × M 22 × 1.5 | |
| High-pressure hose Longlife, 20 m, DN 8, 400 bar, 2 × EASY!Lock | 56 | 6.110-027.0 | with rotary coupling, 2 × M 22 × 1.5 | |

EQUIPMENT FOR HD 7/12-4 M ST 1.524-937.0



| | | Order no. | Description | |
|---|--------|-------------|---|--|
| HIGH-PRESSURE HOSES | | | | |
| Longlife 400 with unions on both sides | | | | |
| High-pressure hose Longlife, 15 m, DN 8, 400 bar, 2 × EASY!Lock | 57 | 6.110-029.0 | With rotary coupling, 2 × M 22 × 1.5 | |
| Food industry version with unions on both side | es | • | | |
| High-pressure hose food grade, 10 m, DN 8, 250 bar, 2 × EASY!Lock | 58 | 6.110-051.0 | 10 m high-pressure hose (DN 8) with patented (rotating) AVS trigger gun connector. Non-discolouring outer layer for use in the food industry. M 22 × 1.5 with anti-kink sleeve. | |
| High-pressure hose food grade, 20 m, DN 8, 250 bar, 2 × EASY!Lock | 59 | 6.110-052.0 | 20 m high-pressure hose (DN 8) with swivel coupling. Non-discolouring outer layer for use in the food industry. Connectors at both ends, M 22 \times 1.5, with kink protection. NW 8/155°C/250 bar. | |
| Longlife food industry version with unions on | both s | ides | | |
| High-pressure hose food grade Longlife, 10 m, DN 8, 400 bar, 2 × EASY!Lock | 60 | 6.110-053.0 | With blue, non-marking and animal fat resistant outer covering: durable high-pressure hose (ID 8), 10 m long, ANTI!Twist and EASY!Lock hand screw connection at both ends. | |
| High-pressure hose food grade Longlife, 20 m, DN 8, 400 bar, 2 × EASY!Lock | 61 | 6.110-054.0 | Longlife HP hose for use in the food industry. Außendecke## animal-grease-resistant, non-colour-bleeding material. With patented AVS connection in the pistol (pivot mounted) | |
| PIPE CLEANING | | | | |
| Pipe cleaning hose, ID 6 | | | | |
| Hose assembly TR pipe cleaning DN6 14MPa | 62 | 6.110-108.0 | | |
| | 63 | 6.110-109.0 | | |
| | 64 | 6.110-110.0 | | |
| Hose assembly TR pipe cleaning DN6 max.2 | 65 | 6.110-046.0 | The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8). | |
| Pipe cleaning hose, DN 6, 20 m, 220 bar | 66 | 6.110-008.0 | 20 m flexible high-pressure hose (DN 6) for cleaning pipes up to 220 bar (threaded connection for R 1/8 nozzle). | |
| Hose assembly TR pipe cleaning DN6 max.2 | 67 | 6.110-047.0 | The 30 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8). | |
| Hose assembly TR pipe cleaning DN6 14MPa | 68 | 6.110-048.0 | 10 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle). | |
| Pipe cleaning hose | 69 | 6.110-049.0 | 20 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle). | |
| Pipe cleaning hose, DN 6, 30 m | 70 | 6.110-050.0 | 30 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle). | |

EQUIPMENT FOR HD 7/12-4 M ST 1.524-937.0

83

84



| | | Order no. | Description | |
|------------------------------------|---|---|---|----------|
| PIPE CLEANING | | | · · | |
| Pipe cleaning nozzle | | | | |
| Dirt blaster pipe cleaning D21/040 | 71 | 4.765-001.0 | The forward-tilted rotating pencil jet removes the most stubborn dirt. The three backwards-tilted | |
| Dirt blaster pipe cleaning D21/060 | 72 | iets ensure the peressary forward movement as well as convenient handling | | |
| Dirt blaster pipe cleaning D30/040 | 73 | | | |
| Dirt blaster pipe cleaning D30/060 | 74 | | | |
| Pipe cleaning nozzle | mg nozzle 75 5.763-015.0 16 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes. □ 76 5.763-016.0 and pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes. □ 77 5.763-017.0 30 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes. □ pe cleaning nozzle 78 6.415-428.0 Rotating pipe cleaning nozzle with internal thread and four rotating jets for □ | | | |
| | 76 | 5.763-016.0 | environmentally-friendly cleaning of blocked drains and pipes. | |
| | 77 | 5.763-017.0 | | |
| | | | environmentally-friendly cleaning of blocked drains and pipes. | |
| Rotating pipe cleaning nozzle | 78 | 6.415-428.0 | | |
| FLOOR AND HARD SURFACE CLEANER | | | | |
| Hard Surface Cleaner FRV 30 | | | | |
| FRV 30 | 79 | 2.111-010.0 | Surface cleaner with integrated waste water pick-up | |
| Add-on kit rubber lip | 80 | 2.642-910.0 | For smooth floors indoors. The squeegee increases the suction performance of the FRV 30 and minimises the amount of water remaining. This means the floor is dry in just a few minutes. | |
| Extension hose 5 m | 81 | 4.440-939.0 | 5m extension hose for FRV 30. Connection sleeve included. | |
| Add-on kit hose attachment | 82 | 2.642-528.0 | Suction cup for fixing the suction hose to smooth surfaces. | |
| Add-on kit dirt trap | 83 | 2.642-532.0 | Galvanised steel bucket for collecting coarse dirt and for fixing the suction hose in outside areas. | |
| Hard surface cleaner FR 30 | | | · | |
| FR 30 Surface Cleaner | 84 | 2.111-011.0 | Up to 10 times greater area coverage compared with the conventional high pressure jet. | |
| | | I | 1 | <u> </u> |

□ Available accessories.

EQUIPMENT FOR HD 7/12-4 M ST 1.524-937.0

-

| 85 | 86 | 87 | 81, 88 | 89 | 90 | 91 |
|----|----|----|--------|----------|----|----|
| 92 | 93 | 94 | 95 | 80 96 | 97 | 98 |

| | | Order no. | Description | |
|---|----|-------------|---|---|
| FLOOR AND HARD SURFACE CLEANER | | | | |
| Hard surface cleaner FR 30 ME | | | | |
| FR 30 ME surface cleaner | 85 | 2.111-013.0 | Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry. | |
| Machine-specific nozzle kit for FR | | | | |
| Nozzle kit for FR, 500 l/h - 650 l/h | 86 | 2.640-401.0 | Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (500 to 650 l/h). | |
| Hard surface cleaner FRV 30 Me | | • | | |
| FRV 30 Me Surface Cleaner | 87 | 2.111-012.0 | Thanks to automatic suction of the dirty water, the stainless steel FRV 30 Me Surface Cleaner makes surface cleaning more efficient in both inside and outside areas. Hot water cleaning up to 85°C. | |
| Extension hose FRV 30 Me and FRV 50 Me | 88 | 4.441-040.0 | 5 m extension hose for FRV 30 Me. Includes connecting adapter. | |
| FOAM SYSTEMS | | | | |
| Cup foam lance | | | | |
| Cup foam lance Advanced 1, 400 l/h - 600 l/h | 89 | 4.112-063.0 | | |
| Cup foam lance DUO Advanced 1, 400 I/h - 600 I/h | 90 | 4.112-067.0 | | |
| Cup foam lance Basic 1, 350 l/h - 600 l/h | 91 | 4.112-053.0 | For high-pressure cleaners with a flow rate of 350-600 l/h: new, robust and very high-quality foam cup lance with outstanding foam quality while consuming half as much cleaning agent. | |
| 1-litre cleaning agent container for cup foam lance basic | 92 | 5.071-414.0 | | |
| 1-litre cleaning agent container for cup foam lance advanced | 93 | 6.414-050.0 | Additional 1-litre cleaning agent container for quick replacement of the cleaning agent (for foam lance 2.112-017.0 and 2.112-018.0). | |
| Inno Foam Set | | | | |
| Inno foam kit with detergent injector | 94 | 2.112-000.0 | High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or disinfection. | |
| Easy Foam Set | | | | |
| Easy Foam Set with RM injector | 95 | 2.112-010.0 | HP foam system for use with. HD/HDS units for cleaning and disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine specific nozzle kit has to be ordered separately. | |
| Nozzle kits for Inno/Easy Foam Set | | | | |
| Nozzle kit 055 z. Inno/Easy Set 500 - 600 l/h | 96 | 2.111-009.0 | Optimal adaptation to different machine outputs for economic use. | |
| Foam nozzle mounting kit | | | | |
| Foam nozzle kit | 97 | 2.112-013.0 | Foaming agent kit. The foam nozzle is ideal for use in sanitary areas and the food industry and wherever long application times are necessary. | |
| MIXERS AND INJECTORS | | | | |
| HP detergent injector | | | | |
| Detergent injector for high and low pressure (without nozzles) | 98 | 4.637-032.0 | Detergent injector for independent high and low pressure dosage. Maximum dosage about 15%. | |
| Available accessories. | | | | _ |

□ Available accessories.

EQUIPMENT FOR HD 7/12-4 M ST 1.524-937.0

108

109



DE E

111

112

110

| | | Order no. | Description | | | |
|--|--------|-------------|---|------|--|--|
| MIXERS AND INJECTORS | | | | | | |
| HP detergent injector | | | | | | |
| Detergent injector for high pressure | 99 | 4.637-033.0 | Cleaning agent dosage at high pressure 3 - 5 % | | | |
| Stainless steel injector kit for HD 6/15C | 100 | 6.645-758.0 | Ideal for the HD 6/15 C high-pressure cleaner, the stainless steel injector ensures precise cleaning agent and foam dosage. With suction hose and vacuum filter. | | | |
| Machine-specific nozzle kit with order no. 3.63 | 37-170 |) | | | | |
| Nozzle insert trapezoidal thread HD-GER. | 101 | 4.769-005.0 | For HD 500 - 700 I/h. Consists of nozzle insert + HP power nozzle + union | | | |
| Nozzle insert with order no. 3.637-001 | | | | | | |
| Nozzle insert for Order No. 3.637-001, high-pressure for machines up to 1100 l/h. | 102 | 4.769-003.0 | Nozzle insert for detergent injector 3.637-001 for high-pressure detergent application. For high-pressure cleaners with a water flow rate up to 1100 l/h. | | | |
| Low pressure for units rated 1100 l/h or more | 103 | 4.769-006.0 | For low pressure with machines above 1.100 l/h | | | |
| COUPLING PARTS | | | | | | |
| Rotary coupling | | | | | | |
| Rotary coupling | 104 | 4.111-021.0 | Kärcher rotary coupling prevents twisting and kinking of high-pressure hoses for ease of use. Connector Easy!Lock. With grip protection. | | | |
| Connector | | | | | | |
| Nozzle connector/screw connector | 105 | 4.111-022.0 | Nozzle connector/screw connector for connecting high-pressure nozzles and accessories to the high-pressure trigger gun (with nozzle connector). Connectors: $1 \times M 22 \times 1.5$ and $1 \times M 18 \times 1.5$. | | | |
| Short spray unit | 106 | 4.111-038.0 | For attaching high-pressure nozzles and accessory parts to HP trigger gun (with nozzle screws). No compatible with triple nozzles. | ot 🗆 | | |
| Adapter EASY!Lock | | | | | | |
| Adapter 1 M22AG-TR22AG | 107 | 4.111-029.0 | Adapter 1 to connect the old hose with the new hose | | | |
| Adapter 2 M22IG-TR22AG | 108 | 4.111-030.0 | Adapter 2 to connect the old device with the new hose and the old gun with the new hose | C | | |
| Adapter 3 M22IG-TR22AG | 109 | 4.111-031.0 | Adapter 3 to connect the old gun with the new spray lance and new servo regulator | C | | |
| Adapter M22 - Swivel | 110 | 4.111-032.0 | M22 × 1,5female and swivel connection. For extension of high-pressure hoses with AVS connection or for usage of the telescopic lance with a high-pressure hose with AVS connection. | ٦C | | |
| Adapter 5 TR22IG-M22AG | 111 | 4.111-033.0 | Adapter 5 to connect the new gun with the old spray lance and new servo regulator with the old spray lance | | | |
| Adapter 6 TR22IG-M22AG | 112 | 4.111-034.0 | Adapter 6 to connect the new device with the old hose and the old hose with the new gun | Γ | | |
| | | | 1 | _ | | |

Available accessories.

EQUIPMENT FOR HD 7/12-4 M ST 1.524-937.0

| | | | $\begin{bmatrix} 1 & 1 & 1 \\ 1 & 1 & 1 \\ 1 & 1 & 1 \\ 1 & 1 &$ | |
|--|-----|-------------|---|---|
| | | Order po | Description | |
| COUPLING PARTS | | Order no. | Description | |
| Adapter EASY!Lock | | | | |
| Adapter 7 M18IG-TR20AG | 113 | 4.111-035.0 | Adapter 7 to connect the old spray lance with the new nozzle | |
| Adapter 8 TR20IG-M18AG | 114 | 4.111-036.0 | Adapter 8 to connect the new spray lance with the old nozzle | |
| Coupler -2xM22x1,5 | 115 | 4.111-037.0 | Brass double connector for connecting and extending high-pressure hoses. With rubber protection. Connector: $2 \times M 22 \times 1.5 \text{ m}$. | |
| ADAPTER for replacement TR22IG-M22AG Er | 116 | 4.111-046.0 | Rotatable adapter for connecting EASY!Force high-pressure gun and high-pressure hoses with M 22x1.5 connection | |
| HOSE REELS | | | | |
| Hose reel add-on kit | | | | |
| Hose reel attachment kit for HD middle class, 15 m | 117 | 2.110-024.0 | Hose reel attachment kit for high-pressure middle class | |
| Automatic, self-winding hose reels | | 1 | | _ |
| Automatic plastic hose reel incl. high-pressure hose, 15 m | | 2.639-257.0 | | |
| Automatic hose reel, powder-coated steel / plastic, 20 m | 119 | 6.392-074.0 | the drum is made from plastic. | |
| Automatic stainless steel / synthetic material hose drum, 20 m | 120 | 6.392-083.0 | Automatic hose reel for 20 m high-pressure hose. The console consists of stainless steel, the drum is made from plastic. | |
| Automatic hose reel, coated, 20 m | 121 | 6.392-106.0 | Automatic hose reel of durable plastic. Painted steel bracket. Suitable for 20 m high-pressure hose. | |
| Hose reel, automatic, basalt grey-coated, 20 m | 122 | 6.392-105.0 | Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses. | |
| Automatic hose reel, stainless steel, includes swivel holder, 20 m | 123 | 6.392-076.0 | Automatic stainless steel hose reel. With swivel holder. Suitable for 20 m high-pressure hose. | |
| Automatic stainless steel hose reel, 40 m | 124 | 6.392-442.0 | Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses. Compatible high-pressure hose, e.g. order no. 6.110-076.0 (ID 8, 40 m, 400 bar, 1x hose reel connection attachment kit). | |
| Powder-coated swivel holder | 125 | 2.639-931.0 | Swivel holder for automatic hose reel wall mounting. For maximum action radius and flexibility of high-pressure hose. Rotatable 120°. Galvanised steel. | |
| Stainless steel swivel holder | 126 | 2.641-867.0 | Swivelling wall bracket made of high-grade steel (for 2.641-866). This makes maximum flexibility and convenience possible when working with the HP hose. | |

EQUIPMENT FOR HD 7/12-4 M ST 1.524-937.0



| | | 1 | | | | |
|-----------------------------------|-----|-------------|--|-----|--|--|
| | | | | | | |
| | | Order no. | Description | | | |
| FACADE AND SOLAR PANEL CLEANING | | | | | | |
| Brushes | | | | | | |
| Drive for roller brush 500 | 127 | 4.762-584.0 | Hydraulic drive for rotating roller brushes. For cleaning façades or solar power installations with our professional high-pressure cleaners. Installation on spray lance or telescopic lance. | | | |
| Splash guard for roller brush 500 | 128 | 4.762-621.0 | Splash guard with velcro fastening for rotating roller brush. Clear view of the brush thanks to transparent film, with protection against splashes at the same time. | | | |
| Roller brush 500 soft | 129 | 4.762-623.0 | Soft brush attachment for use with hydraulic drive (4.762-584.0). Ideal for glass and solar power installation cleaning. Easy quick-change system and secure mounting on drive. | | | |
| Roller brush 500 medium | 130 | 4.762-624.0 | Medium-hard brush attachment for use with hydraulic drive (4.762-584.0). Suitable for sensitive façades, foils and fabrics. Easy and safe quick-change system. | | | |
| Roller brush 500 hard | 131 | 4.762-625.0 | Hard brush attachment for use with hydraulic drive (4.762-584.0). For rough façades, stone and wooden patios. Safe and easy quick-change system. | | | |
| Brush hard | 132 | 6.960-133.0 | Brush with hard bristles for cleaning industry facades and floor coverings and removing coarse dirt. Simple installation on telescopic lances or high-pressure lances from Kärcher. | | | |
| Brush medium | 133 | 6.960-134.0 | Optimally cleans facades, roller shutters and textile fabrics: the brush with medium-hard bristles for fast and simple attachment to telescopic lances or high-pressure lances from Kärcher. | | | |
| Brush soft | 134 | 6.960-135.0 | For simple installation on telescopic lances or high-pressure lances from Kärcher: brush with soft bristles for deep cleaning of sensitive surfaces such as glass or solar systems. | | | |
| iSolar 400 Advanced | 135 | 6.368-092.0 | iSolar 400 brush for water flow rate of 700-1,000 l/h. The water-driven disc brush with a width of 400 mm cleans small to medium-sized photovoltaic systems. Also perfect for use on elevated systems. | | | |
| Telescopic | | <u>!</u> | | | | |
| TL low pressure adapter | 136 | 4.580-097.0 | TL low-pressure adapter comprising ball valve for tool-free installation on telescopic lances. Ideal for applications with rotating high-pressure brushes. | | | |
| Telescopic lance TL 7 F | 137 | 4.762-609.0 | Telescopic lance TL 7 F with up to 7 m reach made from robust and lightweight glass fibre. With practical quick-release fasteners for simple retraction and extension. | | | |
| Telescopic lance TL 7 H | 138 | 4.762-610.0 | Multifunctional hybrid telescopic lance TL 7 H made of rigid and lightweight carbon-glass fibre mix Telescopic thanks to quick-release fastenings. Up to 7 m reach. | . [| | |
| Telescopic lance TL 10 H | 139 | 4.762-611.0 | Up to 10 m reach: hybrid telescopic lance TL 10 H. Comprising carbon-glass fibre mix and suitable for multifunctional use. Simple retraction and extension thanks to quick-release fasteners. | | | |
| Telescopic lance TL 10 C | 140 | 4.762-612.0 | Carbon fibre telescopic lance TL 10 C. With up to 10 m reach and practical quick-release fasteners. Multifunctional use for cleaning facades, windows or solar panels. | | | |

□ Available accessories.

EQUIPMENT FOR HD 7/12-4 M ST 1.524-937.0

153

154

| 141 | 142 | 143-144 | 145 | 146-14 | 149 | 150-151 |
|-----|-----|---------|-----|--------|-----|---------|
| | | - | | | | |

| | | Order no. | Description | | |
|---|-----|-------------|---|-----|--|
| FACADE AND SOLAR PANEL CLEANING | | | | | |
| Telescopic | | | | | |
| Telescopic lance TL 14 C | | | Maximum rigidity with minimum weight: telescopic lance TL 14 C made from carbon fibre. Enormous reach of 14 m, multifunctional use and easy to use thanks to quick-release fasteners. | | |
| TL high pressure adapter | 142 | 4.775-154.0 | TL high-pressure adapter, flexible high-pressure gun for high-pressure cleaning with telescopic lances. Ergonomic, easy to install, suitable for right- and left-handed individuals. | | |
| Wasserenthärtung | | | | | |
| WS 50 | 143 | 6.368-463.0 | The mobile WS 50 water softening unit prevents lime residue on clean surfaces. A special ion-exchange resin removes the dissolved limescale from the water. | | |
| WS 100 | 144 | 6.368-464.0 | 64.0 The mobile WS 100 water softening unit prevents lime residue on clean surfaces. A special ion-exchange resin removes the dissolved limescale from the water. | | |
| WS Regenerator | 145 | 6.368-465.0 | With the WS Regenerator regeneration system, the softening cartridges of the water softening unit WS 50 and WS 100 can be backflushed and regenerated at the push of a button. | s 🗆 | |
| Hoses | | | | | |
| Hose solar | 146 | 6.392-978.0 | High-quality, flexible HP hose (with rubber covering) for the iSolar TL 7. The outer layer has especially good sliding properties when extending and retracting the telescopic rod. | | |
| | 147 | 6.392-977.0 | High-quality, flexible HP hose (with rubber covering) for the iSolar TL 10. The outer layer has especially good sliding properties when extending and retracting the telescopic rod. | | |
| | 148 | 6.392-976.0 | High-quality, flexible HP hose (with rubber covering) for the iSolar TL 14. The outer layer has especially good sliding properties when extending and retracting the telescopic rod. | | |
| Attachment kits and adapters | | | | | |
| Case sheet steel | 149 | 6.988-152.0 | Certified personal security system for rooftop work. Contents: Travelling fall arrestor with shock absorber and 15 m kernmantle rope, harness, anchoring sling and sheet steel case. | | |
| WET BLASTING ATTACHMENT | | 1 | | | |
| Wet blasting attachment (without nozzle) | | | | | |
| Wet blasting attachment with flow control (without nozzles) | 150 | 4.115-000.0 | Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet. | | |
| Wet blasting attachment without flow control (nozzles not included) | 151 | 4.115-006.0 | Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet. Without flow control. | | |
| Nozzle pack for wet blasting attachment | | | | | |
| Nozzle pack TR wet jet set 0045 | 152 | 2.112-022.0 | Nozzle kit with wet blasting nozzle and nozzle insert (type specific). For optimal Kärcher wet blasting attachment performance. Only in combination with wet blasting attachment 4.115-000.0 4.115-006.0. | | |
| Boron carbide nozzle | | | | | |
| Boron carbide nozzle, for machines as of 1000 l/h | 153 | 6.415-084.0 | In addition to nozzle packs. Very wear-resistant nozzle with boron carbide chuck for continuous-duty operation. | | |
| ADD-ON KITS | | | | | |
| HP stationary attachment kit | | | | | |
| Add-on kit float | 154 | 2.637-736.0 | | | |
| Available accessories. | | , | | | |

□ Available accessories.

EQUIPMENT FOR HD 7/12-4 M ST 1.524-937.0

















166

| | | Order no. | Description | | |
|---|-----|-------------|--|--|--|
| WATER CONNECTION | | | | | |
| Geka coupling | | | | | |
| With hose nozzle, R 1/2" | 155 | 6.388-461.0 | 0 with hose liner | | |
| With hose nozzle, R 3/4" | 156 | 6.388-455.0 | | | |
| With hose nozzle, R 1" | 157 | 6.388-465.0 | with hose barb | | |
| With female thread, R 3/4" | 158 | 6.388-473.0 | with female thread | | |
| Suction filter | | | | | |
| Water filter | 159 | 6.414-956.0 | Suitable for ponds, storage tanks or similar, polyamide filter casing, stainless steel strainer, 800 µm mesh, R 3/4" and R 1" connection, without non-return valve | | |
| Suction filter with check valve | 160 | 4.730-012.0 | Brass suction filter suitable for ponds, storage tanks, etc. With check valve. | | |
| Fine-mesh water filter | | | | | |
| Add-on kit water filter universal | 161 | 2.637-020.0 | | | |
| Fine-mesh water filter, 100 $\mu m,$ R 3/4" | 162 | 2.637-691.0 | Fine-mesh water filter, 100 μ m, max. temperature 60°C. Protects the high-pressure cleaner from dirt particles contained in the water. Transparent filter cup. Water flow rate up to 1200 l/h. Connector 3/4". | | |
| Fine-mesh water filter with adapter | 163 | 4.730-102.0 | 2.0 Fine-mesh water filter, 125 µm, max. temperature 50°C. Protects the high-pressure cleaner fro dirt particles contained in the water. Water flow rate up to 1200 l/h. Connection 3/4", with ada 1". | | |
| WASHING BRUSHES | | | | | |
| Push-on washing brush | | | | | |
| Push-on wash brush, M 18 \times 1.5 | 164 | 4.113-001.0 | D1.0 Push-on wash brush for universal use. Simply push on to lance. Connector: M 18 × 1.6. | | |
| Rotating washing brush | | | | | |
| Rotating wash brush for < 800 l/h machines, nylon bristles | 165 | 4.113-004.0 | The rotating wash brush gently removes fine dust and traffic film from all surfaces. Temperature resistant up to 60°C. (M 18 \times 1.5, replaceable brush insert). | | |
| Rotating wash brush for < 800 l/h machines, natural bristles | 166 | 4.113-003.0 | D Driven by water stream. Gently removes fine dust and traffic film from any surface. Temperature resistant up to 60°C, M 18 × 1.5 (replaceable brush insert). | | |