HDS 1000 BE

Hot water pressure washer with petrol combustion engine













Order no.

1.811-942.0


- Petrol engine with electric starter
- Energy-saving EASY!Force high-pressure gun for fatigue-free work
- Professional high-performance hot water unit

_		
Technical data		
EAN code		4054278169200
Flow Rate	l/h	450 - 900
Operating pressure	bar / MPa	40 - 210 / 4 - 21
Temperature (supply 12°C)	°C	min. 80 - max. 98
Consumption fuel oil	kg/h	5.6
Fuel tank	1	34
Drive type		Petrol
Motor manufacturer		Honda
Motor type		GX 390
number of simultaneous users		1
Mobility		Stationary
Weight (with accessories)	kg	175.7
Weight incl. packaging	kg	181.5
Dimensions (L × W × H)	mm	1100 × 750 × 785

This device does not require instruction.

Equipment	
Trigger gun	EASY!Force Advanced
Cage frame	
Electric starter	
Power nozzle	•
Servo Control	
Sturdy tubular steel frame for	
handling with crane	_
Included in delivery.	

HDS 1000 BE, 1.811-942.0, 2024-04-29

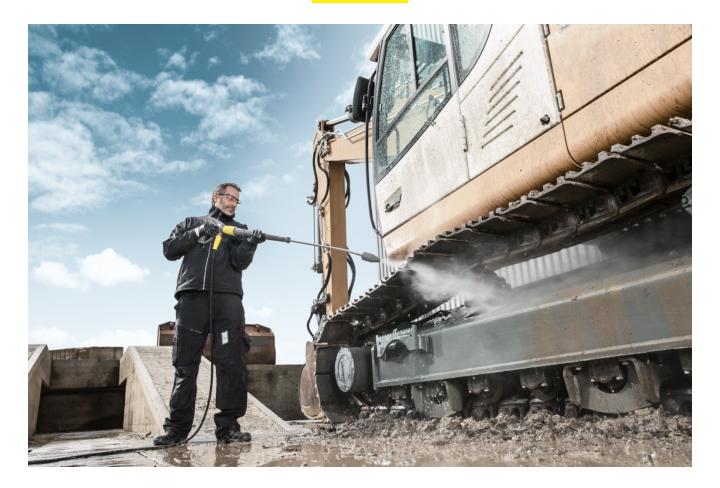



Optimum ease of use

- Automatic burner cut-out in case of water shortage, overheating protection.
- Ergonomically designed trigger gun for ease of use.



Maximum performance

- High-output burner with upright heating coil and continuous ignition without deflagration.
- For removing stubborn deposits.
- Two integrated diesel and petrol tanks allow long run times.



Powerful petrol engine

- Complies with the requirements of exhaust emissions standard EU STAGE V.
- Electric starter for effortless starting.



























9
14

		Order no.	Description	
TRIGGER GUNS				
Trigger guns				
EASY!Force Advanced	1	4.118-005.0	Effortless, not energy-sapping: the EASY!Force high-pressure gun uses the recoil force of the high-pressure jet to reduce the holding force for the operator to zero.	•
EASY!Force conversion kit 1 - from high-pressure hose	2	4.111-050.0	For retrofitting Kärcher high-pressure cleaners with existing high-pressure hose: EASY!Force conversion kit 1 with EASY!Force high-pressure gun, spray lance and all adapters through to the nozzle.	
EASY!Force conversion kit 2 - from machine	3	4.111-051.0	Developed for retrofitting existing high-pressure cleaners from Kärcher: EASY!Force conversion kit 2 with EASY!Force high-pressure gun, spray lance, high-pressure hose and necessary adapters.	
EASY!Force conversion kit 3 - high-pressure gun	4	4.111-052.0	Compatible with existing high-pressure hose and spray lance: EASY!Force conversion kit 3, incl. EASY!Force trigger gun and all necessary adapters for upgrading your high-pressure cleaner.	
Servo Control		'		
Servo Control, 750 l/h - 1100 l/h	5	4.118-008.0	Water quantity and pressure regulated directly from the hand spray gun.	
SPRAY LANCES				
Rotating spray lances				
Spray lance, 1050 mm, rotatable	6	4.112-000.0	1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	•
LED nozzle light	7	2.680-002.0	Bright, lightweight LED work light for direct mounting on spray lance of EASY!Force high-pressure gun. Better view in unfavourable lighting conditions for up to 5 working hours.	
Spray lance, 250 mm, rotatable	8	4.112-027.0	Spray lance, 250 mm, rotatable, ergonomic	
Spray lance, 400 mm, rotatable	9	4.112-024.0	Spray lance, 400 mm, rotatable, ergonomic	
Spray lance, 600 mm, rotatable	10	4.112-007.0	600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	
Spray lance, 840 mm, rotatable	11	4.112-006.0	850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	
Spray lance, 1550 mm, rotatable	12	4.112-018.0	1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	
Spray lance, 2050 mm, rotatable	13	4.112-021.0	2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	
Spray lance extender, 1000 mm	14	4.112-048.0	Spray lance extension with EASY!Lock connection. Length 1000 mm.	

 $[\]blacksquare$ Included in delivery. \qed Available accessories.



















				\top
		0	Province to the second	
SPRAY LANCES		Order no.	Description	_
Double lance				_
Double lance, 960 mm	15	2.112-016.0	960 mm double lance for variable pressure adjustment on handle at full water flow rate. Suitable for agricultural use (e.g. stable cleaning).	
Angular spray lance				
WC and gutter lance	16	4.112-029.0	Stainless steel lance WC and gutter with nozzle insert. Specially shaped for effective and hygienic cleaning of gutters and toilets.	
Flexible spray lance				
Flexible lance, 1050 mm	17	4.112-035.0	1050 mm flexible lance with variable bend from 20° to 140° , ideal for cleaning difficult to reach areas, e.g. gutters.	
High pressure articulated joint	18	4.112-057.0	For hard-to-reach areas: High-pressure articulated joint with infinite angle adjustment up to 120°. Simply attach directly to the spray lance of the pressure washer.	
Gutter cleaner				
Gutter cleaning lance	19	2.112-015.0	The lance is suited for cleaning of gutter systems. Because of the shape of the lance and the specia nozzle the gutter can be cleaned without removing the cover plates.	
Undercarriage spray lance	•			
Underbody lance	20	4.112-032.0	Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle.	
Additional handle				
Additional handle for EASY!Lock spray lances	21	4.321-380.0	Comfortable in every situation – the additional handle is easy to attach to the spray lance of our new EASY!Lock generation and makes work easier by allowing you to adjust your posture to suit the particular task.	
KÄRCHER POWER NOZZLE				
Power nozzle spray angle 25°				
Power nozzle 25°, 047	22	2.113-009.0	Fan jet nozzle with 25° spray angle, suitable for large areas and removing stubborn dirt and stains.	
Power nozzle 25°, 032	23	2.113-071.0	Fan jet nozzle for large-area coverage and stubborn dirt and stains.	
Power nozzle 25°, 045	24	2.113-022.0	Fan jet nozzle with 25° spray angle, suitable for large areas and removing stubborn dirt and stains.	. [
HP nozzle spray angle 0°				İ
Power nozzle 0°, 050	25	2.113-034.0	High-pressure nozzle with powerful jet for extremely stubborn dirt.	
Power nozzle spray angle 15°	·			
Power nozzle 15°, 045	26	2.113-046.0	Fan jet nozzle with 15° spray angle suitable for stubborn dirt.	
Power nozzle 15°, 055	27	2.113-047.0		
Power nozzle spray angle 40°		l		+
Power Nozzle 40°, 050	28	2.113-054.0	Power nozzle with a 40° spray angle and fan jet, suitable for large areas and sensitive surfaces.	

lacksquare Included in delivery. \Box Available accessories.





















		1		_
		Order no.	Description	
HIGH-PRESSURE HOSES				
Standard with unions on both sides				
High-pressure hose, 15 m, DN 8, 315 bar, 2 × EASY!Lock	29	6.110-030.0	15 m high-pressure hose (M 22×1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN $8/155^{\circ}$ C/315 bar.	•
High-pressure hose, 10 m, DN 10, 220 bar, 2 × EASY!Lock	30	6.110-041.0		
High-pressure hose, 10 m, DN 8, 315 bar, 2 × EASY!Lock	31	6.110-031.0	10 m high-pressure hose (M 22×1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN $8/155^{\circ}$ C/315 bar.	
High-pressure hose, 20 m, DN 8, 315 bar, 2 × EASY!Lock	32	6.110-032.0	20 m high-pressure hose (M 22×1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN $8/155^{\circ}$ C/315 bar.	
High-pressure hose, 30 m, DN 8, 315 bar, 2 × EASY!Lock	33	6.110-014.0	With rotary coupling, 2 \times M 22 \times 1.5	
High-pressure hose, 15 m, DN 10, 220 bar, 2 × EASY!Lock	34	6.110-042.0	15 m high-pressure hose M 22 × 1.5) with kink protection and threaded couplings at both ends. Further data: DN 10/155°C/220 bar.	
High-pressure hose, 20 m, DN 10, 220 bar, 2 × EASY!Lock	35	6.110-043.0	with union on both sides, M 22×1.5 with anti-kink protection. NW $10/155^{\circ}$ C/220 bar	
High-pressure hose, 25 m, DN 10, 220 bar, 2 × EASY!Lock	36	6.110-044.0		
High-pressure hose, 15 m, DN 12, 210 bar, 2 × EASY!Lock	37	6.110-059.0	High-pressure hose for water volumes greater than 1,800 l / h. With union on both sides. $2x M 22 \times 1.5$ with anti-kink protection.	
High-pressure hose, 40 m, DN 12, 210 bar, 2 × EASY!Lock	38	6.110-060.0		
Longlife 400 with unions on both sides				
High-pressure hose Longlife, 1,5 m, DN 8, 400 bar, 2 \times EASY!Lock	39	6.110-024.0	1.5 m high-pressure hose (DN 8, M 22×1.5) with kink protection and connectors at both ends. For connecting to hose reels with appropriate connector (M 22×1.5).	
High-pressure hose Longlife, 1,5 m, DN 8, 400 bar, $1 \times EASY!Lock / 1 \times M22 \times 1.5$	40	6.110-069.0	High-pressure hose (ID 8) with double steel reinforcement, 1.5 m long, suitable for up to 400 bar pressure. Connectors: M 22 × 1.5, quick and convenient EASY!Lock hand screw connection.	
High-pressure hose Longlife, 10 m, DN 8, 400 bar, 2 × EASY!Lock	41	6.110-038.0	Durable, 10 m long high-pressure hose (ID 8) with double steel reinforcement and EASY!Lock hand screw connection at both ends and ANTI!Twist. Approved for 400 bar pressure.	
High-pressure hose Longlife, 30 m, DN 8, 400 bar, 2 × EASY!Lock	42	6.110-023.0	With rotary coupling, 2 × M 22 × 1.5	

 $[\]blacksquare$ Included in delivery. \qed Available accessories.

KÄRCHER



























		Order no.	Description	
HIGH-PRESSURE HOSES		<u> </u>		
Longlife 400 with unions on both sides				
High-pressure hose Longlife, 20 m, DN 8, 400 bar, 2 × EASY!Lock	43	6.110-027.0	with rotary coupling, 2 × M 22 × 1.5	
High-pressure hose Longlife, 15 m, DN 8, 400 bar, 2 × EASY!Lock	44	6.110-029.0	With rotary coupling, 2 × M 22 × 1.5	
Food industry version with unions on both sid	es	'		
High-pressure hose food grade, 15 m, DN 6, 250 bar, 2 × EASY!Lock	45	6.110-063.0	15 m high-pressure hose (DN 6) with patented (rotating) AVS trigger gun connector. Non-discolouring outer layer for use in the food industry. DN 6/155°C/250 bar.	
High-pressure hose food grade, 10 m, DN 8, 250 bar, 2 × EASY!Lock	46	6.110-051.0	10 m high-pressure hose (DN 8) with patented (rotating) AVS trigger gun connector. Non-discolouring outer layer for use in the food industry. M 22 × 1.5 with anti-kink sleeve.	
High-pressure hose food grade, 20 m, DN 8, 250 bar, 2 × EASY!Lock	47	6.110-052.0	20 m high-pressure hose (DN 8) with swivel coupling. Non-discolouring outer layer for use in the food industry. Connectors at both ends, M 22 × 1.5, with kink protection. NW 8/155°C/250 bar.	
Longlife food industry version with unions on	both s	ides		
High-pressure hose food grade Longlife, 10 m, DN 8, 400 bar, $2 \times \text{EASY!Lock}$	48	6.110-053.0	With blue, non-marking and animal fat resistant outer covering: durable high-pressure hose (ID 8), 10 m long, ANTI!Twist and EASY!Lock hand screw connection at both ends.	
High-pressure hose food grade Longlife, 20 m, DN 8, 400 bar, 2 \times EASY!Lock	49	6.110-054.0	Longlife HP hose for use in the food industry. Außendecke## animal-grease-resistant, non-colour-bleeding material. With patented AVS connection in the pistol (pivot mounted)	
WEED CONTROL				
WR 50	50	2.114-013.0	In combination with a hot water high-pressure cleaner from Kärcher, the 50 cm wide weed remover WR 50 is ideal for removing weeds. It comes with an adaptive chassis and nozzle adapter.	
WR 20	51	2.114-014.0	For thorough weed removal: The WR 20 weed remover for use with a hot water high-pressure cleaner from Kärcher. Equipped with a 20 cm wide nozzle bar and nozzle adapter.	
WR 100	52	2.114-015.0	Comfortable and fast weed removal: WR 100 weed remover with chassis, 100 cm wide nozzle bar and integrated nozzle adapter for use with hot water high-pressure cleaners.	
WR 10	53	2.114-016.0	In combination with hot water high-pressure cleaners our WR 10 weed remover enables fast and thorough weed removal. With 10 cm spray head and nozzle adapter.	
ECO!BOOSTER				
HydroBooster JET TR 050 Professional	54	2.113-088.0		
QUICK CONNECT				
Quick-fitting pipe union coupler trapezo	55	2.115-000.0	For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit, suitable for trigger gun/spray lance interface. With M 22 × 1.5 internal thread.	
Quick-fitting pipe union plug nipple tra	56	2.115-001.0	Hardened stainless steel male coupling for quick coupling 2.115-000. With M 22 \times 1.5 external thread.	

 $[\]hfill \square$ Available accessories.























DRUM AND TANK CLEANING		Order no.	Description	
	57	2.641-798.0		1
Add-on kit mud sucker	5/	2.641-798.0		
OTHER HP ACCESSORIES		0.000.007.0		. 1
Jet gun	58	2.869-067.0	Short set-up time, easy transport, instant switch off - the jet gun is the affordable cleaning method for all kinds of small to medium-sized areas. Adjustable pressure/water volume.	d
ROTARY NOZZLES (DIRT BLASTERS)				
Dirt blaster, large				
Dirt blaster Vibrasoft, 050	59	4.114-066.0	Vibrasoft rotary nozzle with rotating point jet for ten times greater cleaning performance. Durable dirt blaster thanks to ceramic nozzle. Reduces vibrations by up to 30% for maximum ergonomics.	2
Dirt blaster, large, 050	60	4.114-027.0	The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozz and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C.	le
MULTIPLE-JET NOZZLES				
Angle vario nozzle 0°-90°				
Angled Vario nozzle, 050	61	4.113-007.0	Variable angle nozzle for spray angle adjustment from 0° to 90°. For easy adjustment to all kinds of	of
			soiling and surfaces.	
NOZZLE UNION / SPACER			soiling and surfaces.	_
NOZZLE UNION / SPACER Nozzle union			soiling and surfaces.	
•	62	4.112-011.0	Soiling and surfaces. Nozzle screws with protectors for high-pressure and power nozzles	
Nozzle union	62	4.112-011.0		
Nozzle union Nozzle screws	62	4.112-011.0		
Nozzle union Nozzle screws PIPE CLEANING		4.112-011.0	Nozzle screws with protectors for high-pressure and power nozzles	
Nozzle union Nozzle screws PIPE CLEANING Pipe cleaning hose, ID 6			Nozzle screws with protectors for high-pressure and power nozzles The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning	
Nozzle union Nozzle screws PIPE CLEANING Pipe cleaning hose, ID 6 Hose assembly TR pipe cleaning DN6 max.2 Pipe cleaning hose, DN 6, 20 m, 220 bar	63	6.110-046.0	Nozzle screws with protectors for high-pressure and power nozzles The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8). 20 m flexible high-pressure hose (DN 6) for cleaning pipes up to 220 bar (threaded connection for	
Nozzle union Nozzle screws PIPE CLEANING Pipe cleaning hose, ID 6 Hose assembly TR pipe cleaning DN6 max.2	63	6.110-046.0	Nozzle screws with protectors for high-pressure and power nozzles The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8). 20 m flexible high-pressure hose (DN 6) for cleaning pipes up to 220 bar (threaded connection for R 1/8 nozzle). The 30 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning	
Nozzle union Nozzle screws PIPE CLEANING Pipe cleaning hose, ID 6 Hose assembly TR pipe cleaning DN6 max.2 Pipe cleaning hose, DN 6, 20 m, 220 bar Hose assembly TR pipe cleaning DN6 max.2	63	6.110-046.0	Nozzle screws with protectors for high-pressure and power nozzles The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8). 20 m flexible high-pressure hose (DN 6) for cleaning pipes up to 220 bar (threaded connection for R 1/8 nozzle). The 30 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning	
Nozzle union Nozzle screws PIPE CLEANING Pipe Cleaning hose, ID 6 Hose assembly TR pipe cleaning DN6 max.2 Pipe cleaning hose, DN 6, 20 m, 220 bar Hose assembly TR pipe cleaning DN6 max.2 Pipe cleaning nozzle	63 64 65	6.110-046.0 6.110-008.0 6.110-047.0	Nozzle screws with protectors for high-pressure and power nozzles The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8). 20 m flexible high-pressure hose (DN 6) for cleaning pipes up to 220 bar (threaded connection for R 1/8 nozzle). The 30 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	
Nozzle union Nozzle screws PIPE CLEANING Pipe cleaning hose, ID 6 Hose assembly TR pipe cleaning DN6 max.2 Pipe cleaning hose, DN 6, 20 m, 220 bar Hose assembly TR pipe cleaning DN6 max.2 Pipe cleaning nozzle Dirt blaster pipe cleaning D21/060	63 64 65	6.110-046.0 6.110-008.0 6.110-047.0 4.765-002.0	Nozzle screws with protectors for high-pressure and power nozzles The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8). 20 m flexible high-pressure hose (DN 6) for cleaning pipes up to 220 bar (threaded connection for R 1/8 nozzle). The 30 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8). The forward-tilted rotating pencil jet removes the most stubborn dirt. The three backwards-tilted	
Nozzle union Nozzle screws PIPE CLEANING Pipe cleaning hose, ID 6 Hose assembly TR pipe cleaning DN6 max.2 Pipe cleaning hose, DN 6, 20 m, 220 bar Hose assembly TR pipe cleaning DN6 max.2 Pipe cleaning nozzle Dirt blaster pipe cleaning D21/060 Dirt blaster pipe cleaning D30/060	63 64 65 66 67	6.110-046.0 6.110-008.0 6.110-047.0 4.765-002.0 4.765-005.0	Nozzle screws with protectors for high-pressure and power nozzles The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8). 20 m flexible high-pressure hose (DN 6) for cleaning pipes up to 220 bar (threaded connection for R 1/8 nozzle). The 30 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8). The forward-tilted rotating pencil jet removes the most stubborn dirt. The three backwards-tilted jets ensure the necessary forward movement, as well as convenient handling.	

[☐] Available accessories.





























		Order no.	Description	L
PIPE CLEANING				
Pipe cleaning nozzle	1			1-
Rotating pipe cleaning nozzle	71	6.415-428.0	Rotating pipe cleaning nozzle with internal thread and four rotating jets for environmentally-friendly cleaning of blocked drains and pipes.	
FLOOR AND HARD SURFACE CLEANER				
Hard Surface Cleaner FRV 30				
Add-on kit hose attachment	72	2.642-528.0	Suction cup for fixing the suction hose to smooth surfaces.	
Add-on kit dirt trap	73	2.642-532.0	Galvanised steel bucket for collecting coarse dirt and for fixing the suction hose in outside areas.	
Hard surface cleaner FR 30 ME		'		
FR 30 ME surface cleaner	74	2.111-013.0	Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry.	
Hard Surface Cleaner FR 50		'		
FR 50 surface cleaner	75	2.111-023.0	Hot water resistant stainless steel surface cleaner with 500 mm working width. Ideal for large areas.With double ceramic bearings, push handle, non-marking swivel castors and detergent dosing system.	g
Machine-specific nozzle kit for FR				
Nozzle kit for FR, 850 l/h - 1100 l/h	76	2.640-442.0	Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (850 to 1100 l/h).	
Machine-specific nozzle kits for FRV		'		
Nozzle kit for FRV, 050	77	2.642-433.0	Machine-specific nozzle kit with Kärcher power nozzles and jet nozzle for FRV 30.	
Hard surface cleaner FRV 30 Me				
FRV 30 Me Surface Cleaner	78	2.111-012.0	Thanks to automatic suction of the dirty water, the stainless steel FRV 30 Me Surface Cleaner makes surface cleaning more efficient in both inside and outside areas. Hot water cleaning up to 85°C.	
Extension hose FRV 30 Me and FRV 50 Me	79	4.441-040.0	5 m extension hose for FRV 30 Me. Includes connecting adapter.	
FOAM SYSTEMS				
Cup foam lance				
Cup foam lance Advanced 3, 900 l/h - 2500 l/h	80	4.112-065.0		
Cup foam lance DUO Advanced 3, 900 /h - 2500 l/h	81	4.112-069.0		
Cup foam lance Basic 3, 900 l/h - 2500 l/h	82	4.112-055.0	For high-pressure cleaners with a flow rate of 900-2500 l/h: new, robust and very high-quality foam cup lance with outstanding foam quality while consuming half as much cleaning agent.	
1-litre cleaning agent container for cup foam lance basic	83	5.071-414.0		
1-litre cleaning agent container for cup foam lance advanced	84	6.414-050.0	Additional 1-litre cleaning agent container for quick replacement of the cleaning agent (for foam lance 2.112-017.0 and 2.112-018.0).	

 $[\]hfill \square$ Available accessories.



























		0	Beautiful		
FOAM SYSTEMS		Order no.	Description	_	
Inno Foam Set					
Inno foam kit with detergent injector	85	2.112-000.0	High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For	[
			use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or		
Inno foam kit	86	2.112-008.0	disinfection.	[
Easy Foam Set				با	
Easy Foam Set with RM injector	87	2.112-010.0	HP foam system for use with. HD/HDS units for cleaning and disinfecting. Foam nozzle for		
Easy foam set	88	2.112-011.0	connection to lance and HP chemical injector with precision 0-5% metering valve. The machine specific nozzle kit has to be ordered separately.		
Nozzle kits for Inno/Easy Foam Set					
Nozzle kit 090 Inno/Easy kit 700 - 1000 I/h	89	2.111-019.0	Nozzle kit contains Kärcher power nozzles and nozzle inserts. For Inno/Easy-Foam set 700-1000 l/h. For optimal foam system performance.	[
Foam nozzle mounting kit					
Foam nozzle kit	90	2.112-013.0	Foaming agent kit. The foam nozzle is ideal for use in sanitary areas and the food industry and wherever long application times are necessary.		
MIXERS AND INJECTORS		<u>'</u>			
HP detergent injector					
Detergent injector for high and low pressure (without nozzles)	91	4.637-032.0	Detergent injector for independent high and low pressure dosage. Maximum dosage about 15%.		
Detergent injector for high pressure	92	4.637-033.0	Cleaning agent dosage at high pressure 3 - 5 %	[
Machine-specific nozzle kit with order no. 3.63	7-170)			
Nozzle insert trapezoidal thread HDS-GER	93	4.769-011.0	For HD/HDS 750 - 1000 l/h. Consists of nozzle insert + HP power nozzle + union	[
Machine-specific nozzle kit with order no. 3.637-170.0 750-1000 l/h	94	4.769-047.0		[
Nozzle insert with order no. 3.637-001					
Nozzle insert for Order No. 3.637-001, high-pressure for machines up to 1100 l/h.	95	4.769-003.0	Nozzle insert for detergent injector 3.637-001 for high-pressure detergent application. For high-pressure cleaners with a water flow rate up to 1100 l/h.	[
Low pressure for units rated up to 1100 l/h	96	4.769-001.0	For low pressure with machines up to 1.100 l/h	[
COUPLING PARTS					
Rotary coupling					
Rotary coupling	97	4.111-021.0	Kärcher rotary coupling prevents twisting and kinking of high-pressure hoses for ease of use. Connector Easy!Lock. With grip protection.	[
Connector		•			
Nozzle connector/screw connector	98	4.111-022.0	Nozzle connector/screw connector for connecting high-pressure nozzles and accessories to the high-pressure trigger gun (with nozzle connector). Connectors: 1x M 22 × 1.5 and 1x M 18 × 1.5.		

 $[\]hfill \square$ Available accessories.





























	_			_
		Order no.	Description	
COUPLING PARTS				
Connector				
Y distributor	99	4.111-024.0	Offers the option to connect two spray units to the machine. Installation on the high pressure outlet.	
Short spray unit	100	4.111-038.0	For attaching high-pressure nozzles and accessory parts to HP trigger gun (with nozzle screws). Not compatible with triple nozzles.	t 🗆
Adapter EASY!Lock				
Adapter 1 M22AG-TR22AG	101	4.111-029.0	Adapter 1 to connect the old hose with the new hose	
Adapter 2 M22IG-TR22AG	102	4.111-030.0	Adapter 2 to connect the old device with the new hose and the old gun with the new hose	
Adapter 3 M22IG-TR22AG	103	4.111-031.0	Adapter 3 to connect the old gun with the new spray lance and new servo regulator	
Adapter M22 - Swivel	104	4.111-032.0	M22 \times 1,5female and swivel connection. For extension of high-pressure hoses with AVS connection or for usage of the telescopic lance with a high-pressure hose with AVS connection.	
Adapter 5 TR22IG-M22AG	105	4.111-033.0	Adapter 5 to connect the new gun with the old spray lance and new servo regulator with the old spray lance	
Adapter 6 TR22IG-M22AG	106	4.111-034.0	Adapter 6 to connect the new device with the old hose and the old hose with the new gun	
Adapter 7 M18IG-TR20AG	107	4.111-035.0	Adapter 7 to connect the old spray lance with the new nozzle	
Adapter 8 TR20IG-M18AG	108	4.111-036.0	Adapter 8 to connect the new spray lance with the old nozzle	
Coupler -2xM22x1,5	109	4.111-037.0	Brass double connector for connecting and extending high-pressure hoses. With rubber protection. Connector: $2x \ M \ 22 \times 1.5 \ m$.	
ADAPTER for replacement TR22IG-M22AG Er	110	4.111-046.0	Rotatable adapter for connecting EASY!Force high-pressure gun and high-pressure hoses with M 22x1.5 connection	
HOSE REELS				
Hose reel add-on kit				
Hose reel attachment kit for HDS gasoline machines, 20 m	111	2.110-005.0	ABS hose reel for mounting on the machine. For safe and tidy stowage of high-pressure hoses (with connecting hose to machine's HP outlet). Can be rotated under pressure, with M 22×1.5 connection.	1 [
Automatic, self-winding hose reels				
Automatic plastic hose reel incl. high-pressure hose, 15 $\ensuremath{\mathrm{m}}$	112	2.639-257.0		

[☐] Available accessories.



























		Order no.	Description	
HOSE REELS				
Automatic, self-winding hose reels				
Automatic hose reel, powder-coated steel / plastic, 20 m	113	6.392-074.0	Automatic hose reel for 20 m high-pressure hose. The console is made from powder-coated steel, the drum is made from plastic.	
Automatic stainless steel / synthetic material hose drum, 20 m	114	6.392-083.0	Automatic hose reel for 20 m high-pressure hose. The console consists of stainless steel, the drum is made from plastic.	
Automatic hose reel, coated, 20 m	115	6.392-106.0	Automatic hose reel of durable plastic. Painted steel bracket. Suitable for 20 m high-pressure hose.	. 🗆
Hose reel, automatic, basalt grey-coated, 20 m	116	6.392-105.0	Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses.	
Automatic hose reel, stainless steel, includes swivel holder, 20 m	117	6.392-076.0	Automatic stainless steel hose reel. With swivel holder. Suitable for 20 m high-pressure hose.	
Automatic stainless steel hose reel, 40 m	118	6.392-442.0	Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses. Compatible high-pressure hose, e.g. order no. 6.110-076.0 (ID 8, 40 m, 400 bar, 1x hose reel connection attachment kit).	
Powder-coated swivel holder	119	2.639-931.0	Swivel holder for automatic hose reel wall mounting. For maximum action radius and flexibility of high-pressure hose. Rotatable 120°. Galvanised steel.	
Stainless steel swivel holder	120	2.641-867.0	Swivelling wall bracket made of high-grade steel (for 2.641-866). This makes maximum flexibility and convenience possible when working with the HP hose.	
FACADE AND SOLAR PANEL CLEANING		<u> </u>		
Brushes				
Drive for roller brush 500	121	4.762-584.0	Hydraulic drive for rotating roller brushes. For cleaning façades or solar power installations with our professional high-pressure cleaners. Installation on spray lance or telescopic lance.	
Splash guard for roller brush 500	122	4.762-621.0	Splash guard with velcro fastening for rotating roller brush. Clear view of the brush thanks to transparent film, with protection against splashes at the same time.	
Roller brush 500 soft	123	4.762-623.0	Soft brush attachment for use with hydraulic drive (4.762-584.0). Ideal for glass and solar power installation cleaning. Easy quick-change system and secure mounting on drive.	
Roller brush 500 medium	124	4.762-624.0	Medium-hard brush attachment for use with hydraulic drive (4.762-584.0). Suitable for sensitive façades, foils and fabrics. Easy and safe quick-change system.	
Roller brush 500 hard	125	4.762-625.0	Hard brush attachment for use with hydraulic drive (4.762-584.0). For rough façades, stone and wooden patios. Safe and easy quick-change system.	
Brush hard	126	6.960-133.0	Brush with hard bristles for cleaning industry facades and floor coverings and removing coarse dirt. Simple installation on telescopic lances or high-pressure lances from Kärcher.	

 $^{\ \}square$ Available accessories.























		1		
		Order no.	Description	
FACADE AND SOLAR PANEL CLEANIN	NG			
Brushes				
Brush medium	127	6.960-134.0	Optimally cleans facades, roller shutters and textile fabrics: the brush with medium-hard bristles for fast and simple attachment to telescopic lances or high-pressure lances from Kärcher.	
Brush soft	128	6.960-135.0	For simple installation on telescopic lances or high-pressure lances from Kärcher: brush with soft bristles for deep cleaning of sensitive surfaces such as glass or solar systems.	
iSolar 800 Advanced	129	6.368-094.0	iSolar 800 water-driven brush head, 800 mm wide, for water flow rates of 700-1,000 l/h. With two contra-rotating disc brushes and flexible angle joint. For photovoltaic systems.) 🗆
iSolar 400 Advanced	130	6.368-092.0	isolar 400 brush for water flow rate of 700-1,000 l/h. The water-driven disc brush with a width of 400 mm cleans small to medium-sized photovoltaic systems. Also perfect for use on elevated systems.	
Telescopic	'	'		
TL low pressure adapter	131	4.580-097.0	TL low-pressure adapter comprising ball valve for tool-free installation on telescopic lances. Ideal for applications with rotating high-pressure brushes.	
Telescopic lance TL 7 F	132	4.762-609.0	Telescopic lance TL 7 F with up to 7 m reach made from robust and lightweight glass fibre. With practical quick-release fasteners for simple retraction and extension.	
Telescopic lance TL 7 H	133	4.762-610.0	Multifunctional hybrid telescopic lance TL 7 H made of rigid and lightweight carbon-glass fibre mix Telescopic thanks to quick-release fastenings. Up to 7 m reach.	
Telescopic lance TL 10 H	134	4.762-611.0	Up to 10 m reach: hybrid telescopic lance TL 10 H. Comprising carbon-glass fibre mix and suitable for multifunctional use. Simple retraction and extension thanks to quick-release fasteners.	
Telescopic lance TL 10 C	135	4.762-612.0	Carbon fibre telescopic lance TL 10 C. With up to 10 m reach and practical quick-release fasteners. Multifunctional use for cleaning facades, windows or solar panels.	
Telescopic lance TL 14 C	136	4.762-613.0	Maximum rigidity with minimum weight: telescopic lance TL 14 C made from carbon fibre. Enormous reach of 14 m, multifunctional use and easy to use thanks to quick-release fasteners.	
TL high pressure adapter	137	4.775-154.0	TL high-pressure adapter, flexible high-pressure gun for high-pressure cleaning with telescopic lances. Ergonomic, easy to install, suitable for right- and left-handed individuals.	
Wasserenthärtung				Т
WS 50	138	6.368-463.0	The mobile WS 50 water softening unit prevents lime residue on clean surfaces. A special ion-exchange resin removes the dissolved limescale from the water.	
WS 100	139	6.368-464.0	The mobile WS 100 water softening unit prevents lime residue on clean surfaces. A special ion-exchange resin removes the dissolved limescale from the water.	
WS Regenerator	140	6.368-465.0	With the WS Regenerator regeneration system, the softening cartridges of the water softening units WS 50 and WS 100 can be backflushed and regenerated at the push of a button.	5 🗆

[☐] Available accessories.



















		Order no.	Description	
FACADE AND SOLAR PANEL CLEANING		010011101		_
Hoses				_
Hose solar	141	6.392-978.0	High-quality, flexible HP hose (with rubber covering) for the iSolar TL 7. The outer layer has especially good sliding properties when extending and retracting the telescopic rod.	
	142	6.392-977.0	High-quality, flexible HP hose (with rubber covering) for the iSolar TL 10. The outer layer has especially good sliding properties when extending and retracting the telescopic rod.	
	143	6.392-976.0	High-quality, flexible HP hose (with rubber covering) for the iSolar TL 14. The outer layer has especially good sliding properties when extending and retracting the telescopic rod.	
Attachment kits and adapters				
Case sheet steel	144	6.988-152.0	Certified personal security system for rooftop work. Contents: Travelling fall arrestor with shock absorber and 15 m kernmantle rope, harness, anchoring sling and sheet steel case.	
WET BLASTING ATTACHMENT				
Wet blasting attachment (without nozzle)				
Wet blasting attachment with flow control (without nozzles)	145	4.115-000.0	Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet.	
Wet blasting attachment without flow control (nozzles not included)	146	4.115-006.0	Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet. Without flow control.	
Nozzle pack for wet blasting attachment				L.
Nozzle pack TR wet jet set 0045	147	2.112-022.0	Nozzle kit with wet blasting nozzle and nozzle insert (type specific). For optimal Kärcher wet blasting attachment performance. Only in combination with wet blasting attachment $4.115-000.0 \mid 4.115-006.0$.	
Nozzle pack TR wet jet set 0050	148	2.112-023.0	Nozzle kit with wet blasting nozzle and nozzle insert (type specific). For optimal Kärcher wet blasting attachment performance. Only in combination with wet blasting attachment .	
Boron carbide nozzle				
Boron carbide nozzle, for machines as of 1000 l/h	149	6.415-084.0	In addition to nozzle packs. Very wear-resistant nozzle with boron carbide chuck for continuous-duty operation.	
ADD-ON KITS				
Wheel mounting kit				Ļ
Practical kit with pneumatic tyres	150	2.637-820.0	Practical kit with pneumatic tyres for HDS 1000 BE and HDS 1000 DE high-pressure cleaners. For improved manoeuvrability.	
WATER CONNECTION				
Geka coupling		1		
With hose nozzle, R 3/4"	151	6.388-455.0	with hose liner	
With hose nozzle, R 1"	152	6.388-465.0	with hose barb	
With female thread, R 3/4"	153	6.388-473.0	with female thread	[
Suction filter		•		
Water filter	154	6.414-956.0	Suitable for ponds, storage tanks or similar, polyamide filter casing, stainless steel strainer, 800 µm mesh, R 3/4" and R 1" connection, without non-return valve	1 [

[☐] Available accessories.

















		Order no.	Description	
WATER CONNECTION				<u> </u>
Suction filter				
Suction filter with check valve	155	4.730-012.0	Brass suction filter suitable for ponds, storage tanks, etc. With check valve.	
Fine-mesh water filter				
Add-on kit water filter universal	156	2.637-020.0		
Fine-mesh water filter, 100 μm, R 3/4"	157	2.637-691.0	Fine-mesh water filter, 100 µm, max. temperature 60°C. Protects the high-pressure cleaner from dirt particles contained in the water. Transparent filter cup. Water flow rate up to 1200 l/h. Connector 3/4".	
Fine-mesh water filter with adapter	158	4.730-102.0	Fine-mesh water filter, $125 \mu m$, max. temperature 50° C. Protects the high-pressure cleaner from dirt particles contained in the water. Water flow rate up to $1200 l/h$. Connection $3/4^{\circ}$, with adapter 1° .	-,
Water supply hose				
Water supply hose	159	4.440-207.0	NW 19 R1" / R 3/4", up to 85 $^{\circ}$ C, for pick-up	
WASHING BRUSHES				
Push-on washing brush				
Push-on wash brush, M 18×1.5	160	4.113-001.0	Push-on wash brush for universal use. Simply push on to lance. Connector: M 18×1.6 .	
Rotating washing brush	•			
Rotating wash brush for > 800 l/h machines, nylon bristles	161	4.113-002.0	Driven by water stream. Gently removes fine dust and traffic film from any surface. Temperature resistant up to 60° C, M 18×1.5 (replaceable brush insert).	
Rotating wash brush for > 800 l/h machines, natural bristles	162	4.113-005.0		

[☐] Available accessories.