

HD 13/35 GE CAGE

This product uses up to 350 bar of pressure to remove even the most stubborn dirt. The robust cage design provides all-round protection and enables safe crane loading. With sack-trolley principle for easy transportation.



Order no.

1.367-505.0

- Robust industrial gun
- Gasoline engine with electro start
- Automatic speed reduction

Technical data

EAN code		4039784731004
Working pressure	bar / MPa	100 – max. 350 / 10 – 35
Flow rate	l/h	500 – 1300
Inlet temperature	°C	max. 60
Fuel		Petrol
Motor manufacturer		Honda
Motor type		GX 690
Motor rating	kW	16
Pump type		Maximum performance Kärcher crankshaft pump
Weight without accessories	kg	122
Weight (with accessories)	kg	150
Dimensions (L × W × H)	mm	930 × 800 × 920

This machine requires instruction.

Equipment

Electro start		■
High-pressure hose length	m	10
High-pressure hose type		Heavy duty
Spray gun		Industrial trigger gun
Stainless steel spray lance	mm	700
Flat jet nozzle		■
Safety valve		■
Elapsed time counter		■

■ Included in the scope of supply.



Speed regulation

- The speed is automatically reduced in standby mode. This protects the engine and saves energy.





Portability



Independence

ACCESSORIES FOR HD 13/35 GE CAGE

1.367-505.0



		Order no.	Description	
ULTRA-HIGH-PRESSURE CLEANERS				
High-pressure hoses				
Pressure hose, 10 m, 620 bar, M22 × 1.5	1	6.391-846.0	650 bar, M 22 × 1.5	■
Pressure hose, 3 m, 640 bar, M22 × 1.5	2	6.391-856.0	650 bar, M 22 × 1.5.	□
Pressure hose, 10 m, 640 bar, M22 × 1.5	3	6.391-848.0	650 bar, M 22 × 1.5	□
Pressure hose, 20 m, 640 bar, M22 × 1.5	4	6.391-857.0	650 bar, M 22 × 1.5.	□
Pressure hose, 20 m, 620 bar, M22 × 1.5	5	6.391-847.0		□
Pressure hose, 30 m, 620 bar, M22 × 1.5	6	6.391-019.0	Durable, abrasion-resistant and flexible multi-layer steel-reinforced hose with connection size M 22 × 1.5. Suitable for up to 620 bar working pressure.	□
Trigger guns				
Kärcher industry gun	7	4.775-824.0	650 bar – industrial spray gun with optimised flow. Robustness and durability for professional use. Food-safe and saltwater-resistant materials. Connector for HP hoses M 22 × 1.5.	■
Spray lances				
Spray lance	8	4.760-679.0	With nozzle holder.	■
	9	4.760-653.0		□
Jet pipe complete 1550 mm 65 MPa	10	4.760-675.3		□
Spray lance	11	4.760-677.0		□
Spray lance extension	12	4.760-699.0	Spray lance extension 800 mm, 65 MPa.	□
Attachment kits				
Attachment kit water shortage protection	13	2.641-923.0	For petrol engines.	□
ABS protection against water shortage	14	2.851-028.0	ABS steering rollers.	□

■ Included in the scope of supply. □ Available accessories.

ACCESSORIES FOR HD 13/35 GE CAGE

1.367-505.0



		Order no.	Description	
ULTRA-HIGH-PRESSURE CLEANERS				
Couplings and connectors				
Coupling	15	4.403-004.0	For joining and extending HD hoses. Connection 2 × M 22 × 1.5. Material: Stainless steel.	<input type="checkbox"/>
Grease for stainless steel threaded joints	16	6.280-180.0	Grease for stainless steel screw connections.	<input type="checkbox"/>
Pipe cleaning				
Foot valve for pipe cleaning	17	6.470-223.0	Foot valve for convenient and safe use of accessories for effective pipe cleaning.	<input type="checkbox"/>
Pipe cleaning nozzle standard 050 50MPa	18	4.765-012.0	Standard pipe cleaning nozzle for pipe cleaning hoses with G1/4" threaded connection. Nozzle configuration: 3x backward.	<input type="checkbox"/>
Pipe cleaning nozzle Four 050 50MPa	19	4.765-016.0	For pipe cleaning hoses with G1/4" threaded connection: Quattro pipe cleaning nozzle. Nozzle configuration: 3x backward and 1x forward.	<input type="checkbox"/>
Pipe cleaning nozzle, Rotor	20	5.763-092.0	For pipe cleaning hoses with G1/4" threaded connection: Rotor pipe cleaning nozzle. Nozzle configuration: 3x backward.	<input type="checkbox"/>
Pipe cleaning hose	21	6.392-401.0	Flexible pressure hose (DN 8) for thorough pipe cleaning. 10 m long. Threaded connection for G1/4" nozzle.	<input type="checkbox"/>
	22	6.392-402.0	Flexible pressure hose (DN 8) for thorough pipe cleaning. With threaded connection for G1/4" nozzle and 20 m long.	<input type="checkbox"/>
	23	6.392-403.0	For through pipe cleaning: flexible, 30 m long pressure hose with threaded connection for G1/4" nozzle.	<input type="checkbox"/>
Surface cleaner				
Surface Cleaner FRI 50 Me	24	2.643-577.0	Surface cleaner for efficient cleaning of surfaces up to 500 bar and hot water cleaning up to 100°C. 4 convenient steering rollers. Specific nozzle kits must be ordered separately.	<input type="checkbox"/>
Nozzle package 025 FRI 50 Me	25	6.415-045.0	Nozzle kit specifically for FRI 50 Me Surface Cleaner. Nozzle size: 025.	<input type="checkbox"/>
Abrasive blaster				
Adapter required for abrasive sprayer and TD 3000	26	5.401-325.0	M 20 × 1 IG to 9/16" UNF AG.	<input type="checkbox"/>
Abrasive blaster, incl. 3 × 0.7 nozzle	27	9.872-435.0	Abrasive spray head with nozzle size 3 × 0.7 mm for wet sand blasting. Only includes spray head. Without hose and lance.	<input type="checkbox"/>
Replacement nozzle for abrasive blaster	28	6.025-346.0	Replacement nozzle for abrasive spray head made from boron carbide. Colour blue.	<input type="checkbox"/>

■ Included in the scope of supply. □ Available accessories.

ACCESSORIES FOR HD 13/35 GE CAGE

1.367-505.0




		Order no.	Description	
ULTRA-HIGH-PRESSURE CLEANERS				
Abrasive blaster				
F98 nozzle kit, D 0.70 mm	29	9.886-551.0	For wet sand blasting: three-nozzle kit for abrasive spray head. Nozzle size 0.7 mm.	<input type="checkbox"/>
F98 nozzle for abrasive blaster	30	6.025-255.0	Nozzle (nozzle size 0.7 mm) for abrasive spray head for wet sand blasting.	<input type="checkbox"/>
Suction lance	31	6.025-258.0	For the suction of spray agents.	<input type="checkbox"/>
Abrasive material hose	32	6.025-308.0	Abrasive hose.	<input type="checkbox"/>
Mounting tool for nozzle set	33	6.025-257.0	For F98 nozzles.	<input type="checkbox"/>
Abrasive	34	6.025-309.0	25 kg, 0.5-1.00 mm, garnet sand.	<input type="checkbox"/>
	35	6.025-310.0	25 kg, 0.7-1.40 mm, garnet sand.	<input type="checkbox"/>
NOZZLES				
Power nozzles				
Flat jet nozzle, 15046	36	5.765-165.0	15° flat jet nozzle 15046 for high-pressure cleaner HD 13/35. Suitable for working pressures of up to 350 bar and 1,300 l/h (petrol, 60 Hz).	<input checked="" type="checkbox"/>
Point jet nozzle, 0046	37	5.765-161.0	Point jet nozzle 0046 for high-pressure cleaner HD 13/35. Suitable for working pressures of up to 350 bar and 1,300 l/h (petrol, 60 Hz).	<input type="checkbox"/>
Screw nozzles F21				
Dummy nozzle F21	38	6.025-237.0	F21 screw-on dummy nozzle. Suitable for working pressures of up to 3,000 bar.	<input type="checkbox"/>
Round jet nozzle F21, Saphir, 0,9 mm	39	9.886-216.0	Screw-on F21 sapphire round jet nozzle with a diameter of 0.90 mm. Suitable for working pressures of up to 3,000 bar.	<input type="checkbox"/>
PROTECTIVE CLOTHING				
HD Overall size M	40	6.547-055.0	High-pressure protective suit for safe working with high-pressure water jets of up to 1000 bar. Particularly lightweight design which feels comfortable to wear and provides excellent freedom of movement.	<input type="checkbox"/>
High-pressure protective suit, size L	41	6.547-056.0		<input type="checkbox"/>
HD Overall size XL	42	6.547-057.0		<input type="checkbox"/>

■ Included in the scope of supply. □ Available accessories.

ACCESSORIES FOR HD 13/35 GE CAGE

1.367-505.0

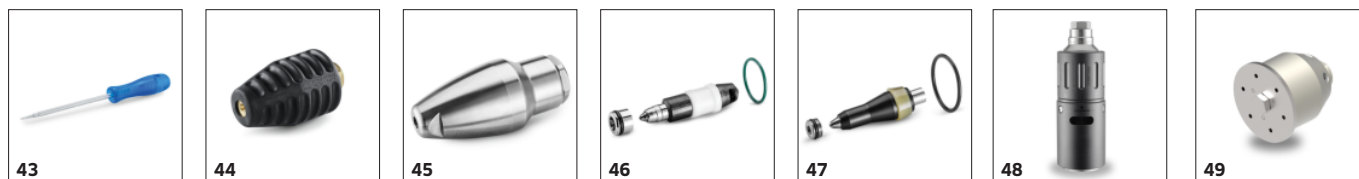

		Order no.	Description	
ROTARY NOZZLES				
Single-jet rotary nozzles				
Tool for changing rotor seat	43	6.025-233.0	For F3, F4, F1, F25.	<input type="checkbox"/>
Rotary jet, 049, 1,35 mm	44	4.767-173.0	350 bar, 1.35 mm, 1,300 l/h, M 20 × 1, brass.	<input type="checkbox"/>
Power rotary jet F7, 050, 1,35 mm	45	6.415-085.0	350 bar, 1.35 mm, 1,300 l/h, M 20 × 1, stainless steel.	<input type="checkbox"/>
Repair set Power Rotary Jet F9 050, 050, 1,35 mm	46	6.812-003.0	Suitable for up to 350 bar pressure and water volume of 1300 litres/hour: repair set, comprising rotor, fitting and O-ring for Power Rotary Jet.	<input type="checkbox"/>
Power rotary jet repair kit F7	47	6.025-436.0	Repair kit for power rotary jet, order no. 6.415-914.0. Suitable for 350 bar working pressure and 1,300 l/h water flow rate. Includes rotor, seat and O-ring (28 × 2).	<input type="checkbox"/>
Multi-jet rotary nozzles				
Nozzle body	48	9.917-677.0	Rotary transmission lead-through with infinitely variable speed control. Includes protective pipe.	<input type="checkbox"/>
Nozzle carrier head TD09	49	9.899-828.0	6-jet nozzle carrier head for F21 nozzle. Suitable for working pressures of up to 3,000 bar. 35° spray angle, includes guard and flow conditioner.	<input type="checkbox"/>

☐ Available accessories.