

HD 9/50 GE CAGE

This product uses up to 500 bar of pressure to remove even the most stubborn dirt. The robust cage design provides all-round protection and enables safe crane loading. With sack-trolley principle for easy transportation.



Order no.

1.367-506.0

- Robust industrial gun
- Gasoline engine with electro start
- Automatic speed reduction

Technical data


| | | |
|----------------------------|-----------|---------------------------------------------|
| EAN code | | 4039784731035 |
| Working pressure | bar / MPa | 150 – max. 500 / 15 – max. 50 |
| Flow rate | l/h | 500 – 900 |
| Inlet temperature | °C | max. 60 |
| Fuel | | Petrol |
| Motor manufacturer | | Honda |
| Motor type | | GX 690 |
| Motor rating | kW | 16 |
| Pump type | | Maximum performance Kärcher crankshaft pump |
| Weight without accessories | kg | 122 |
| Weight (with accessories) | kg | 150 |
| Dimensions (L × W × H) | mm | 930 × 800 × 920 |

This machine requires instruction.

Equipment

| | | |
|-----------------------------|----|------------------------|
| Electro start | | ■ |
| High-pressure hose length | m | 10 |
| High-pressure hose type | | Heavy duty |
| Spray gun | | Industrial trigger gun |
| Stainless steel spray lance | mm | 700 |
| Flat jet nozzle | | ■ |
| Safety valve | | ■ |
| Elapsed time counter | | ■ |

■ Included in the scope of supply.

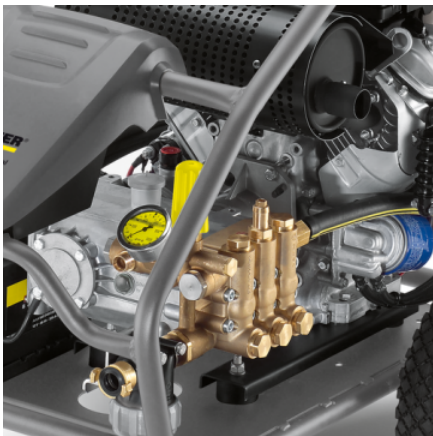

Speed regulation

- The speed is automatically reduced in standby mode. This protects the engine and saves energy.

Industrial spray gun

- Robust and durable: The new Kärcher industrial trigger gun was designed specially for heavy-duty use.

ACCESSORIES FOR HD 9/50 GE CAGE

1.367-506.0



| | | Order no. | Description | |
|------------------------------------------|----|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| ULTRA-HIGH-PRESSURE CLEANERS | | | | |
| High-pressure hoses | | | | |
| Pressure hose, 10 m, 640 bar, M22 × 1.5 | 1 | 6.391-848.0 | 650 bar, M 22 × 1.5 | ■ |
| Pressure hose, 3 m, 640 bar, M22 × 1.5 | 2 | 6.391-856.0 | 650 bar, M 22 × 1.5. | □ |
| Pressure hose, 20 m, 640 bar, M22 × 1.5 | 3 | 6.391-857.0 | | □ |
| Pressure hose, 30 m, 640 bar, M22 × 1.5 | 4 | 6.391-020.0 | Durable, abrasion-resistant and flexible multi-layer steel-reinforced hose with connection size M 22 × 1.5. Suitable for up to 640 bar working pressure. | □ |
| Pressure hose, 10 m, 620 bar, M22 × 1.5 | 5 | 6.391-846.0 | 650 bar, M 22 × 1.5 | □ |
| Pressure hose, 20 m, 620 bar, M22 × 1.5 | 6 | 6.391-847.0 | 650 bar, M 22 × 1.5. | □ |
| Pressure hose, 30 m, 620 bar, M22 × 1.5 | 7 | 6.391-019.0 | Durable, abrasion-resistant and flexible multi-layer steel-reinforced hose with connection size M 22 × 1.5. Suitable for up to 620 bar working pressure. | □ |
| Trigger guns | | | | |
| Kärcher industry gun | 8 | 4.775-824.0 | 650 bar – industrial spray gun with optimised flow. Robustness and durability for professional use. Food-safe and saltwater-resistant materials. Connector for HP hoses M 22 × 1.5. | ■ |
| Spray lances | | | | |
| Spray lance | 9 | 4.760-679.0 | With nozzle holder. | ■ |
| | 10 | 4.760-653.0 | | □ |
| Jet pipe complete 1550 mm 65 MPa | 11 | 4.760-675.3 | | □ |
| Spray lance | 12 | 4.760-677.0 | | □ |
| Spray lance extension | 13 | 4.760-699.0 | Spray lance extension 800 mm, 65 MPa. | □ |
| Attachment kits | | | | |
| Attachment kit water shortage protection | 14 | 2.641-923.0 | For petrol engines. | □ |

■ Included in the scope of supply. □ Available accessories.

ACCESSORIES FOR HD 9/50 GE CAGE

1.367-506.0




| | | Order no. | Description | |
|---------------------------------------------------|----|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|
| ULTRA-HIGH-PRESSURE CLEANERS | | | | |
| Attachment kits | | | | |
| ABS protection against water shortage | 15 | 2.851-028.0 | ABS steering rollers. | <input type="checkbox"/> |
| Couplings and connectors | | | | |
| Coupling | 16 | 4.403-004.0 | For joining and extending HD hoses. Connection 2 × M 22 × 1.5. Material: Stainless steel. | <input type="checkbox"/> |
| Grease for stainless steel threaded joints | 17 | 6.280-180.0 | Grease for stainless steel screw connections. | <input type="checkbox"/> |
| Pipe cleaning | | | | |
| Foot valve for pipe cleaning | 18 | 6.470-223.0 | Foot valve for convenient and safe use of accessories for effective pipe cleaning. | <input type="checkbox"/> |
| Pipe cleaning nozzle standard 030 50MPa | 19 | 4.765-013.0 | Standard pipe cleaning nozzle for pipe cleaning hoses with G1/4" threaded connection. Nozzle configuration: 3x backward. | <input type="checkbox"/> |
| Pipe cleaning nozzle Four 030 50MPa | 20 | 4.765-019.0 | Quattro pipe cleaning nozzle (500/15) for pipe cleaning hoses with G1/4" threaded connection. The chisel point nozzle configuration is 3x backward and 1x forward. | <input type="checkbox"/> |
| Pipe cleaning nozzle, Rotor | 21 | 5.763-095.0 | Rotor pipe cleaning nozzle for pipe cleaning hoses with G1/4" threaded connection. Nozzle configuration: 3x backward. | <input type="checkbox"/> |
| Pipe cleaning hose | 22 | 6.392-401.0 | Flexible pressure hose (DN 8) for thorough pipe cleaning. 10 m long. Threaded connection for G1/4" nozzle. | <input type="checkbox"/> |
| | 23 | 6.392-402.0 | Flexible pressure hose (DN 8) for thorough pipe cleaning. With threaded connection for G1/4" nozzle and 20 m long. | <input type="checkbox"/> |
| | 24 | 6.392-403.0 | For through pipe cleaning; flexible, 30 m long pressure hose with threaded connection for G1/4" nozzle. | <input type="checkbox"/> |
| Surface cleaner | | | | |
| Surface Cleaner FRI 50 Me | 25 | 2.643-577.0 | Surface cleaner for efficient cleaning of surfaces up to 500 bar and hot water cleaning up to 100°C. 4 convenient steering rollers. Specific nozzle kits must be ordered separately. | <input type="checkbox"/> |
| Nozzle package 015 FRI 50 Me | 26 | 6.415-044.0 | Nozzle kit specifically for FRI 50 Me Surface Cleaner. Nozzle size: 015. | <input type="checkbox"/> |
| Abrasive blaster | | | | |
| Adapter required for abrasive sprayer and TD 3000 | 27 | 5.401-325.0 | M 20 × 1 IG to 9/16" UNF AG. | <input type="checkbox"/> |
| Abrasive sprayer | 28 | 9.872-250.0 | Abrasive spray head for wet sand blasting. Nozzle size: 3 × 0.6. Only includes spray head. Without hose and lance. | <input type="checkbox"/> |

■ Included in the scope of supply. □ Available accessories.

ACCESSORIES FOR HD 9/50 GE CAGE

1.367-506.0

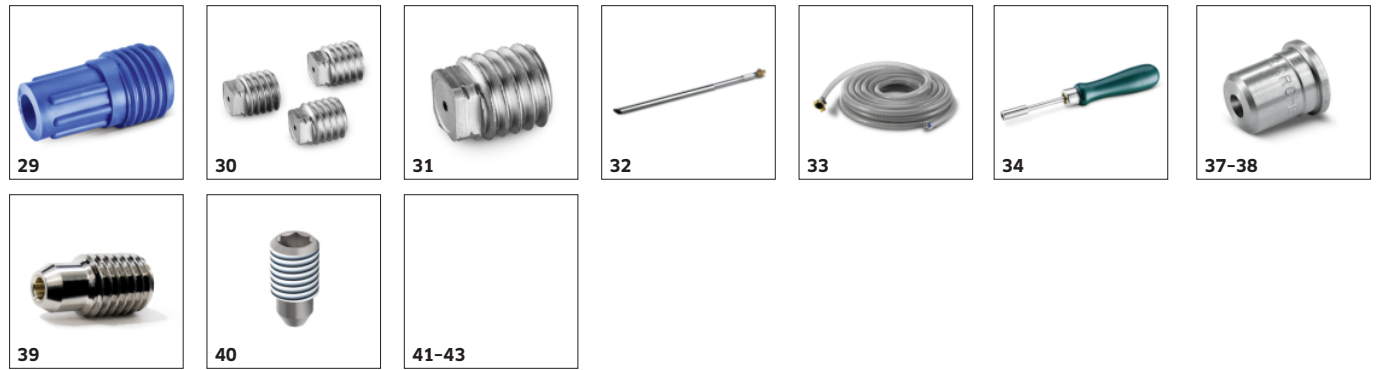

| | | Order no. | Description | |
|-----------------------------------------|----|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| ULTRA-HIGH-PRESSURE CLEANERS | | | | |
| Abrasive blaster | | | | |
| Replacement nozzle for abrasive blaster | 29 | 6.025-346.0 | Replacement nozzle for abrasive spray head made from boron carbide. Colour blue. | <input type="checkbox"/> |
| F98 nozzle set, 0.60 mm | 30 | 9.886-550.0 | | <input type="checkbox"/> |
| Nozzle F98 for abrasive blaster | 31 | 6.025-256.0 | 0.6 mm | <input type="checkbox"/> |
| Suction lance | 32 | 6.025-258.0 | For the suction of spray agents. | <input type="checkbox"/> |
| Abrasive material hose | 33 | 6.025-308.0 | Abrasive hose. | <input type="checkbox"/> |
| Mounting tool for nozzle set | 34 | 6.025-257.0 | For F98 nozzles. | <input type="checkbox"/> |
| Abrasive | 35 | 6.025-309.0 | 25 kg, 0.5-1.00 mm, garnet sand. | <input type="checkbox"/> |
| | 36 | 6.025-310.0 | 25 kg, 0.7-1.40 mm, garnet sand. | <input type="checkbox"/> |
| NOZZLES | | | | |
| Power nozzles | | | | |
| Flat jet nozzle, 15028 | 37 | 5.765-163.0 | 15° flat jet nozzle 15028 for high-pressure cleaner HD 9/50. Suitable for working pressures of up to 500 bar and 900 l/h (petrol, 60 Hz). | <input checked="" type="checkbox"/> |
| Point jet nozzle, 0028 | 38 | 5.765-160.0 | Point jet nozzle 0028 for high-pressure cleaner HD 9/50. Suitable for working pressures of up to 500 bar and 900 l/h (petrol, 60 Hz). | <input type="checkbox"/> |
| Screw nozzles F21 | | | | |
| Dummy nozzle F21 | 39 | 6.025-237.0 | F21 screw-on dummy nozzle. Suitable for working pressures of up to 3,000 bar. | <input type="checkbox"/> |
| Round jet nozzle F21, Saphir, 0,7 mm | 40 | 6.025-222.0 | Screw-on F21 sapphire round jet nozzle with a diameter of 0.70 mm. Suitable for working pressures of up to 3,000 bar. | <input type="checkbox"/> |
| PROTECTIVE CLOTHING | | | | |
| HD Overall size M | 41 | 6.547-055.0 | High-pressure protective suit for safe working with high-pressure water jets of up to 1000 bar. Particularly lightweight design which feels comfortable to wear and provides excellent freedom of movement. | <input type="checkbox"/> |
| High-pressure protective suit, size L | 42 | 6.547-056.0 | | <input type="checkbox"/> |

■ Included in the scope of supply. □ Available accessories.

ACCESSORIES FOR HD 9/50 GE CAGE

1.367-506.0



| | | Order no. | Description | |
|--------------------------------------------------|----|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|
| PROTECTIVE CLOTHING | | | | |
| HD Overall size XL | 43 | 6.547-057.0 | High-pressure protective suit for safe working with high-pressure water jets of up to 1000 bar. Particularly lightweight design which feels comfortable to wear and provides excellent freedom of movement. | <input type="checkbox"/> |
| ROTARY NOZZLES | | | | |
| Single-jet rotary nozzles | | | | |
| Tool for changing rotor seat | 44 | 6.025-233.0 | For F3, F4, F1, F25. | <input type="checkbox"/> |
| Power Rotary Jet F8 030, 030, 1,05 mm | 45 | 6.415-069.0 | 500 bar, 1.05 mm, 900 l/h, M 20 × 1, stainless steel. | <input type="checkbox"/> |
| Repair set Power Rotary Jet F8 030, 030, 1,05 mm | 46 | 6.812-000.0 | Repair set for Power Rotary Jet. Suitable for up to 500 bar pressure and water volume of 900 litres/hour. Incl. rotor, fitting and O-ring. | <input type="checkbox"/> |
| Power rotary jet repair kit F8 | 47 | 6.025-437.0 | Repair kit for power rotary jet, order no. 6.415-915.0. Suitable for 500 bar pressure and 900 l/h water flow rate. Includes rotor, seat and O-ring (28 × 2). | <input type="checkbox"/> |
| Multi-jet rotary nozzles | | | | |
| Nozzle body | 48 | 9.917-677.0 | Rotary transmission lead-through with infinitely variable speed control. Includes protective pipe. | <input type="checkbox"/> |
| Nozzle carrier head TD09 | 49 | 9.899-828.0 | 6-jet nozzle carrier head for F21 nozzle. Suitable for working pressures of up to 3,000 bar. 35° spray angle, includes guard and flow conditioner. | <input type="checkbox"/> |

☐ Available accessories.