

HD 8/18-4 ST H

Stationary high-pressure machine with robust frame and cover made from stainless steel. Powerful with 800 l/h and 180 bar, high-quality equipment and high operational safety.



Made in Germany



Order no.

1.524-966.0

- 4-pole air-cooled motor and robust crankshaft pump with ceramic piston

Technical data

EAN code		4066529057174
Number of current phases	Ph	3
Voltage	V	400
Frequency	Hz	50
Flow rate	l/h	500 - 800
Working pressure	bar / MPa	50 - 180 / 5 - 18
Max. pressure	bar / MPa	240 / 24
Inlet temperature	°C	85
Connected load	kW	5.5
Protection	A	16
Power cable	m	5
Water inlet		1"
Number of users		1
Portability		stationary
Weight (with accessories)	kg	75
Weight incl. packaging	kg	84.8
Dimensions (L × W × H)	mm	800 × 605 × 600

Scope of supply

Servo Control
 Power nozzle
 Frame and cover: Stainless steel
 Prepared for Servo Control
 Pre-equipped for a detergent inlet

Equipment


Crankshaft pump with ceramic pistons
 Advance pressure pump
 Calcification protection
 Dry-running protection
 Large water fine filter
 Storage tank with float valve
 Prepared for remote operation
 RM1 dosage
 Sight glass for oil level
 Oil dipstick
 Air-cooled motor

This machine requires instruction.



High-quality equipment

- Storage tank with valve, limescale protection and dry-running protection.
- Very robust stainless steel frame and cover.
- The machine can alternatively be controlled with a remote control.

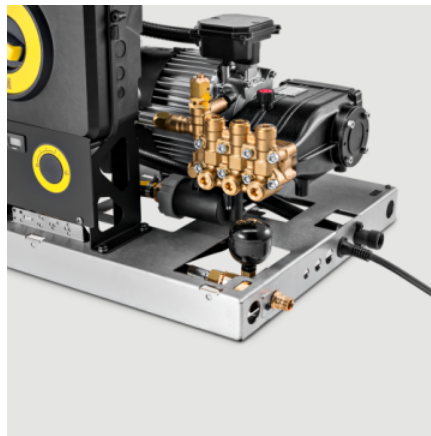

Durable and robust

- Robust crankshaft pump with brass cylinder head and high-quality materials ensure a long service life.
- Reliable and durable Kärcher high-performance crankshaft pump ensures optimal pressure.
- Four-pole, low-speed air-cooled electric motor.



Easy to use

- Just one rotary switch for all functions guarantees simple operation without long training times.
- Particularly user-friendly thanks to self-explanatory symbols. No need for time-consuming induction.
- LEDs indicate readiness for use, water shortage and service interval.

ACCESSORIES FOR HD 8/18-4 ST H 1.524-966.0



	Order no.	Description	
KÄRCHER POWER NOZZLE			
Power nozzle spray angle 25°			
Power nozzle 25°, 043	1 2.113-008.0	Fan jet nozzle with 25° spray angle, suitable for large areas and removing stubborn dirt and stains.	<input checked="" type="checkbox"/>
Power nozzle 25°, 045	2 2.883-398.0		<input type="checkbox"/>
	3 2.113-022.0		<input type="checkbox"/>
Power nozzle 25°, 050	4 2.883-399.0		<input type="checkbox"/>
Power nozzle 25°, 047	5 2.113-009.0		<input type="checkbox"/>
Power nozzle 25°, 052	6 2.883-400.0		<input type="checkbox"/>
Power nozzle , 048	7 2.113-010.0	Fan jet nozzle for large-area coverage and stubborn dirt and stains.	<input type="checkbox"/>
Power nozzle , 055	8 2.883-401.0	Fan jet nozzle for large area coverage and stubborn dirt and stains.	<input type="checkbox"/>
Power nozzle 25°, 052	9 2.113-024.0	Fan jet nozzle with 25° spray angle, suitable for large areas and removing stubborn dirt and stains.	<input type="checkbox"/>
Power nozzle , 054	10 2.113-011.0	Flat jet nozzle for large area performance and stubborn dirt.	<input type="checkbox"/>
Power nozzle , 055	11 2.113-025.0		<input type="checkbox"/>
HP nozzle spray angle 0°			
Power nozzle 0°, 045	12 2.113-033.0	High-pressure nozzle with powerful jet for extremely stubborn dirt.	<input type="checkbox"/>
Power nozzle 0°, 050	13 2.113-034.0		<input type="checkbox"/>
	14 2.884-535.0		<input type="checkbox"/>

■ Included in the scope of supply. □ Available accessories.

ACCESSORIES FOR HD 8/18-4 ST H 1.524-966.0



		Order no.	Description	
KÄRCHER POWER NOZZLE				
HP nozzle spray angle 0°				
Power nozzle 0°, 055	15	2.113-035.0	High-pressure nozzle with powerful jet for extremely stubborn dirt.	<input type="checkbox"/>
Power nozzle spray angle 15°				
Power nozzle 15°, 045	16	2.113-046.0	Fan jet nozzle with 15° spray angle suitable for stubborn dirt.	<input type="checkbox"/>
Power nozzle 15°, 055	17	2.113-047.0		<input type="checkbox"/>
Power nozzle 15°, 060	18	2.113-048.0	Fan jet nozzle for stubborn dirt and stains.	<input type="checkbox"/>
Power nozzle 15°, 045	19	2.883-389.0	Fan jet nozzle with 15° spray angle suitable for stubborn dirt.	<input type="checkbox"/>
Power nozzle 15°, 055	20	2.883-390.0		<input type="checkbox"/>
Power nozzle 15°, 060	21	2.883-391.0	Fan jet nozzle for stubborn dirt and stains.	<input type="checkbox"/>
Power nozzle spray angle 40°				
Power nozzle 40°, 045	22	2.113-053.0	Power nozzle with a 40° spray angle and fan jet, suitable for large areas and sensitive surfaces.	<input type="checkbox"/>
Power nozzle 40°, 050	23	2.113-054.0		<input type="checkbox"/>
Power nozzle 40°, 045	24	2.884-523.0		<input type="checkbox"/>
Power nozzle 40°, 055	25	2.113-055.0		<input type="checkbox"/>
Power nozzle 40°, 050	26	2.884-524.0		<input type="checkbox"/>
Power nozzle 40°, 055	27	2.884-525.0		<input type="checkbox"/>
STATIONARY HIGH-PRESSURE CLEANERS				
Hot water generators				
HWE 13/21-42kW	28	3.070-035.0	The Kärcher water heater is an electric hot water generator with a powerful 42 kW heating output that can be flexibly installed on the high-pressure side of a high-pressure cleaner.	<input type="checkbox"/>

Available accessories.

ACCESSORIES FOR HD 8/18-4 ST H 1.524-966.0



		Order no.	Description	
STATIONARY HIGH-PRESSURE CLEANERS				
Hot water generators				
HWE 860	29	3.070-030.0	The electrical hot water generator is used in combination with a pressure washer and can heat water up to 85 °C.	<input type="checkbox"/>
TRIGGER GUNS				
Spray guns				
Pistol TR 155°C with package	30	4.119-002.0	High-quality Classic spray gun with robust valve. Also suitable for Kärcher hot water high-pressure cleaners.	<input type="checkbox"/>
M22 Classic spray gun	31	4.760-843.0		<input type="checkbox"/>
EASY!Force Advanced	32	4.118-005.0	Effortless, not energy-sapping: the EASY!Force high-pressure gun uses the recoil force of the high-pressure jet to reduce the holding force for the operator to zero.	<input type="checkbox"/>
EASY!Force Food	33	4.118-015.0	Perfect for the food industry: the EASY!Force high-pressure gun with full ceramic valve enables fatigueless working due to virtually zero holding force for the operator.	<input type="checkbox"/>
High-End HD Trigger Gun	34	4.118-011.0	Robust, durable high-end spray gun for use in the food industry and industry. Very low pressure loss - even with water volumes up to 2500 l/h.	<input type="checkbox"/>
High-end HP Food trigger gun	35	4.775-825.0	High-end spray gun with optimised flow. Low pressure losses, even with water flows of up to 2,500 l/h. Robustness and durability for professional use. Food-safe and saltwater-resistant materials offer the best prerequisites for use in the food industry and for commercial use. Connector for HD hoses M 22 × 1.5.	<input type="checkbox"/>
Servo control				
Servo Control, 750 l/h - 1100 l/h	36	4.118-008.0	Water quantity and pressure regulated directly from the hand spray gun.	<input type="checkbox"/>
Servo Control, food, 750 l/h - 1100 l/h	37	4.118-016.0	Water flow and pressure control on the trigger gun. Food-grade, parts in contact with water are stainless steel.	<input type="checkbox"/>
Servo Control, 750 l/h - 1100 l/h	38	4.775-470.0	Water flow and pressure control on the trigger gun.	<input type="checkbox"/>
Servo Control, stainless steel version, 750 l/h - 1100 l/h	39	4.775-800.0	Water volume and pressure regulation directly from the spray gun. Version for the food industry, water-carrying components made from stainless steel.	<input type="checkbox"/>
SPRAY LANCES				
Rotating spray lances				
Jet pipe with transport packaging, 840 mm	40	4.119-003.0	Rotating Classic spray lance with ergonomic handle bowls in a robust and high-quality stainless steel design. Also suitable for Kärcher hot water high-pressure cleaners.	<input type="checkbox"/>
Spray lance Classic EASY!Lock, 1050 mm	41	4.119-008.0	High-pressure spray lance with EASY!Lock screw connections from the Classic series from Kärcher. Also suitable for Kärcher hot water high-pressure cleaners.	<input type="checkbox"/>
Jet pipe TR 600mm with package, 600 mm	42	4.119-009.0	Rotating Classic spray lance with ergonomic handle bowls in a robust and high-quality stainless steel design. Also suitable for Kärcher hot water high-pressure cleaners.	<input type="checkbox"/>

Available accessories.

ACCESSORIES FOR HD 8/18-4 ST H 1.524-966.0



		Order no.	Description	
SPRAY LANCES				
Rotating spray lances				
Jet pipe Classic TR 100mm, 100 mm	43	4.119-013.0	Rotating Classic spray lance with ergonomic handle bowls in a robust and high-quality stainless steel design. Also suitable for Kärcher hot water high-pressure cleaners.	<input type="checkbox"/>
Jet pipe Classic TR 200mm, 200 mm	44	4.119-014.0		<input type="checkbox"/>
Jet pipe Classic TR 400mm, 400 mm	45	4.119-015.0		<input type="checkbox"/>
LED nozzle light	46	2.680-002.0	Bright, lightweight LED work light for direct mounting on spray lance of EASY!Force high-pressure gun. Better view in unfavourable lighting conditions for up to 5 working hours.	<input type="checkbox"/>
Spray lance, 250 mm, rotatable	47	4.112-027.0	Spray lance, 250 mm, rotatable, ergonomic	<input type="checkbox"/>
Spray lance, 400 mm, rotatable	48	4.112-024.0	Spray lance, 400 mm, rotatable, ergonomic	<input type="checkbox"/>
Spray lance, 600 mm, rotatable	49	4.112-007.0	600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	<input type="checkbox"/>
Spray lance, 840 mm, rotatable	50	4.112-006.0	850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	<input type="checkbox"/>
Spray lance, 1050 mm, rotatable	51	4.112-000.0	1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	<input type="checkbox"/>
Spray lance, 1550 mm, rotatable	52	4.112-018.0	1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	<input type="checkbox"/>
Spray lance, 2050 mm, rotatable	53	4.112-021.0	2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	<input type="checkbox"/>
Spray lance, 600 mm, rotatable	54	4.760-664.0	600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	<input type="checkbox"/>
Spray lance, 840 mm, rotatable	55	4.760-663.0	850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	<input type="checkbox"/>
Spray lance, 1050 mm, rotatable	56	4.760-660.0	1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	<input type="checkbox"/>

Available accessories.

ACCESSORIES FOR HD 8/18-4 ST H 1.524-966.0



	Order no.	Description	
SPRAY LANCES			
Rotating spray lances			
Spray lance, 1550 mm, rotatable	57	4.760-661.0	1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure. <input type="checkbox"/>
Spray lance, 2050 mm, rotatable	58	4.760-662.0	2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure. <input type="checkbox"/>
Spray lance			
Spray lance Classic 1,050 mm	59	4.760-855.0	High-pressure spray lance with M 22 screw connections from the Classic series from Kärcher. Also suitable for hot water high-pressure cleaners. <input type="checkbox"/>
Jet pipe Classic M 200mm	60	4.760-887.0	
Jet pipe Classic M 400mm	61	4.760-888.0	
Jet pipe Classic M 840mm	62	4.760-895.0	
250 mm lance, non-rotatable	63	4.760-667.0	250 mm stainless steel lance. With manual coupling. Non-rotatable. <input type="checkbox"/>
550 mm lance, non-rotatable	64	4.760-665.0	550 mm stainless steel lance. With manual coupling. Non-rotatable. <input type="checkbox"/>
Double lance			
Double lance, 960 mm	65	2.112-016.0	960 mm double lance for variable pressure adjustment on handle at full water flow rate. Suitable for agricultural use (e.g. stable cleaning). <input type="checkbox"/>
	66	6.394-665.0	
Flexible spray lance			
Flexible lance, 1050 mm	67	4.112-035.0	1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters. <input type="checkbox"/>
High pressure articulated joint	68	4.112-057.0	For hard-to-reach areas: High-pressure articulated joint with infinite angle adjustment up to 120°. Simply attach directly to the spray lance of the pressure washer. <input type="checkbox"/>
	69	4.481-039.0	High-pressure articulated joint: Thanks to infinite angle adjustment up to 120°, this tool is ideal to effortlessly clean hard-to-reach areas. Simply attach to the spray lance of the pressure washer. <input type="checkbox"/>
Jet pipe flexible 0,85m, 850 mm	70	6.394-655.0	1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters. <input type="checkbox"/>

Available accessories.

ACCESSORIES FOR HD 8/18-4 ST H 1.524-966.0



		Order no.	Description	
SPRAY LANCES				
Flexible spray lance				
Flexible lance, 1050 mm	71	6.394-654.0	1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters.	<input type="checkbox"/>
Undercarriage spray lance				
Underbody lance	72	4.112-032.0	Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle.	<input type="checkbox"/>
	73	4.760-245.0		<input type="checkbox"/>
Additional handle				
Additional handle for EASY!Lock spray lances	74	4.321-380.0	Comfortable in every situation - the additional handle is easy to attach to the spray lance of our new EASY!Lock generation and makes work easier by allowing you to adjust your posture to suit the particular task. Regularly changing your posture relieves the strain on your body, making work more relaxed. Thanks to the 360°-rotatable spray lance, the additional handle can simply be fully rotated whilst working for greater flexibility.	<input type="checkbox"/>
ROTARY NOZZLES (DIRT BLASTERS)				
Dirt blaster, small				
Dirt blaster, small, 045	75	4.114-021.0	Up to 50% higher cleaning and area performance than its predecessor: with the new performance dirt blaster (nozzle size 045), power losses have been minimised and the spray quality maximised.	<input type="checkbox"/>
Dirt blaster, 045	76	4.767-232.0		<input type="checkbox"/>
Dirt blaster, 050	77	4.767-233.0	Full power against stubborn dirt: the new performance dirt blaster with nozzle size 050 achieves up to 50% higher cleaning and area performance than its predecessor.	<input type="checkbox"/>
Dirt blaster, large				
Dirt blaster Vibrasoft, 050	78	4.114-066.0	Vibrasoft rotary nozzle with rotating point jet for ten times greater cleaning performance. Durable dirt blaster thanks to ceramic nozzle. Reduces vibrations by up to 30% for maximum ergonomics.	<input type="checkbox"/>
Dirt blaster, large, 045	79	4.114-042.0	The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C.	<input type="checkbox"/>
Dirt blaster, 050	80	4.763-253.0		<input type="checkbox"/>
ECOBOOSTER				
eco!Booster TR 045	81	2.113-087.0	eco!Booster with 50% more area performance than the Kärcher power nozzle; suitable for delicate surfaces. For cold and hot water high-pressure cleaners (nozzle size 045).	<input type="checkbox"/>
eco!Booster TR 050	82	2.113-088.0	eco!Booster with 50% higher area performance than the Kärcher power nozzle; ideal for delicate surfaces. For cold and hot water high-pressure cleaners (nozzle size 050).	<input type="checkbox"/>
EcoBooster MAX TR 045	83	2.113-096.0	Maximum efficiency and versatility in professional cleaning. The eco!Booster MAX offers more than double the area performance and ergonomic handling.	<input type="checkbox"/>
EcoBooster MAX TR 050	84	2.113-097.0		<input type="checkbox"/>

Available accessories.

ACCESSORIES FOR HD 8/18-4 ST H 1.524-966.0



		Order no.	Description	
QUICK CONNECT				
Quick coupling	85	2.115-000.0	For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit, suitable for trigger gun/spray lance interface. With M 22 × 1.5 internal thread.	<input type="checkbox"/>
Male coupling	86	2.115-001.0	Hardened stainless steel male coupling for quick coupling 2.115-000. With M 22 × 1.5 external thread.	<input type="checkbox"/>
Quick coupling	87	6.401-458.0	For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit, suitable for trigger gun/spray lance interface. With M 22 × 1.5 internal thread.	<input type="checkbox"/>
Male coupling	88	6.401-459.0	Hardened stainless steel male coupling for quick coupling 6.401-458. With M 22 × 1.5 external thread.	<input type="checkbox"/>
TAKE-OFF POINT EQUIPMENT				
Hose and spray lance holder VA	89	2.042-003.0	Hose and spray lance wall holder for practical and safe storage of high-pressure hoses or spray lances. Stainless steel wall holder.	<input type="checkbox"/>
REMOTE CONTROL				
Emergency stop switch - for installation in remote control 2.744-015	90	6.635-434.0		<input type="checkbox"/>
	91	6.651-485.0		<input type="checkbox"/>
Remote release button	92	2.637-491.0	Remote release button for stationary high-pressure cleaners from Kärcher: resets the switch-off after 30 minutes of continuous operation or continuous pause.	<input type="checkbox"/>
Remote control I/O, RM 1/2	93	2.744-014.0	Remote control for controlling a stationary cold water high-pressure cleaner. Functions: on/off and dosing of up to two detergents (RM1/RM2).	<input type="checkbox"/>
Multi-key remote control, I/O, RM 1/2	94	2.744-015.0	Multi-key remote control for switching on and off and dosing up to two detergents (RM1/RM2). In conjunction with E-box 2.744-018.0.	<input type="checkbox"/>
Add-on kit remote control 1 for HD-HDS-Stationary	95	2.744-017.0	Preparation for connecting rotary switch remote controls and emergency stop buttons to stationary cold and hot water high-pressure cleaners from Kärcher.	<input type="checkbox"/>
Add-on kit remote control 2 for HD-HDS-Stationary	96	2.744-018.0	Preparation for connecting push-button remote controls and emergency stop buttons to stationary cold and hot water high-pressure cleaners from Kärcher.	<input type="checkbox"/>
CONTROL CABLE				
Control cable	97	6.647-222.0	Connection cable available as bulk stock (12 × 1.0 mm ²) for use as control cable. For all stationary HD/HDS machines from Kärcher.	<input type="checkbox"/>
Control cable 3 × 1.5 mm ²	98	6.641-059.0	Connecting cable 3 × 1.5 mm ² . Available by the meter.	<input type="checkbox"/>

Available accessories.

ACCESSORIES FOR HD 8/18-4 ST H 1.524-966.0



	Order no.	Description	
CONTROL CABLE			
Control cable 5 × 1.5 m	99	6.641-061.0 Control cable 5 × 1.5	<input type="checkbox"/>
Control cable 7 × 1.5 m	100	6.641-064.0 Control cable 7 × 1.5	<input type="checkbox"/>
Control cable 10 × 1.5 m	101	6.641-082.0 Control cable 10 × 1.5	<input type="checkbox"/>
Conduit	102	2.420-008.0 Conduit for control cable installation. Consisting of 3 m conduit, 5x conduit clips, 5x dowels, 5x screws.	<input type="checkbox"/>
HIGH-PRESSURE PIPEWORK			
High-pressure pipe kit	103	2.420-006.0 High-pressure pipe kit with 3 m stainless pipe Ø 16 × 2 mm, ID 12 and mounting accessories: compression fitting, 4 pipe clamps, 4 hanger bolts and 4 plastic dowels.	<input type="checkbox"/>
Connection piece, pipe/HP hose, stainless steel (Ermeto)	104	2.638-181.0 Stainless steel	<input type="checkbox"/>
Connection piece, pipe/stop cock, stainless steel (Ermeto)	105	2.638-183.0 For stationary HD/HDS machines: Stainless steel transition piece comprising double nipple, union nut and cutting ring. For connecting the pipe to the shut-off valve.	<input type="checkbox"/>
Stop cock, stainless steel (Ermeto)	106	4.580-163.0 Stainless steel shut-off valve with M 22 × 1.5 thread suitable for connecting pipeline and high-pressure hose for stationary high-pressure systems from Kärcher.	<input type="checkbox"/>
Union nut, stainless steel (Ermeto)	107	6.386-428.0 (VA)	<input type="checkbox"/>
T-screw connection, stainless steel (Ermeto)	108	6.386-465.0 Stainless steel	<input type="checkbox"/>
Stainless steel elbow union 90°	109	6.386-466.0 Stainless steel elbow union 90° with compression fitting (Ermeto) at both ends for 16 mm pipes.	<input type="checkbox"/>
Quick coupling, loose part, M 22 × 1.5	110	6.463-023.0 loose part	<input type="checkbox"/>
Connector, galvanised steel	111	2.638-180.0 Alternativ : stainless steel 2.638-181	<input type="checkbox"/>
Shut-off valve, galvanised steel	112	4.580-144.0 Shut-off valve made from zinc-coated steel for stationary high-pressure systems from Kärcher. For connecting the pipeline to the high-pressure hose.	<input type="checkbox"/>

Available accessories.

ACCESSORIES FOR HD 8/18-4 ST H 1.524-966.0



		Order no.	Description	
HIGH-PRESSURE PIPEWORK				
Pipe kit, galvanised steel, 3 m	113	2.420-004.0	High-pressure pipe kit with 3 m galvanised steel pipe Ø 16 x 2.5 mm, DN 11 and fixing accessories: Compression fitting, 4 pipe clamps, 4 hanger bolts and 4 plastic dowels.	<input type="checkbox"/>
Tee, galvanised steel	114	6.386-269.0	Tee (90°), galvanised steel with compression fitting for 16 mm pipes. Fixing material (Ermeto) included.	<input type="checkbox"/>
Elbow union, galvanised steel	115	6.386-356.0	Elbow union, galvanised steel. With 90° angle piece with compression fitting (Ermeto) at both ends for 16 mm pipes.	<input type="checkbox"/>
Pipe insulation, per running meter	116	6.286-147.0	For thermal insulation of pipes. Pipe cladding. Wall thickness 9 mm. PE foam with moisture barrier. Available per running meter.	<input type="checkbox"/>
Adapter piece, galvanised steel	117	2.638-182.0	Alternative: stainless steel 2.638-183	<input type="checkbox"/>
Quick-release coupling, fixed part	118	6.463-025.0	fixed part	<input type="checkbox"/>
Union nut, galvanised steel	119	6.386-423.0	Union nut, galvanised steel. For 16 mm compression fitting.	<input type="checkbox"/>
Cutting ring	120	6.386-357.0	Galvanised steel cutting ring. For 16 mm compression fitting.	<input type="checkbox"/>
PLANT INSTALLATION				
Fine-mesh water filter	121	2.209-806.0	Fine-mesh water filter	<input type="checkbox"/>
Emergency Stop switch	122	2.744-002.0	Emergency Stop switch with ISO housing for wall mounting. With 0.4 m power cord and fixing material.	<input type="checkbox"/>
HOSE TRACK SYSTEM HIGH-PRESSURE CLEANERS				
C-rail holder	123	6.541-027.0	Wall-mounted C-rail holding clamp for hose guide of Kärcher high-pressure cleaners.	<input type="checkbox"/>
C-rail, per running metre	124	6.233-017.0	C-rail profile as a guide track. 30x32 mm, 2 mm wall thickness 1.56 kg/m. Available per running metre.	<input type="checkbox"/>
Rail connector	125	6.541-011.0	Rail connector	<input type="checkbox"/>
End stop	126	6.541-025.0	End stop	<input type="checkbox"/>

Available accessories.

ACCESSORIES FOR HD 8/18-4 ST H 1.524-966.0



127



128



129



130



132



134



135-136



137-138



139, 155-156, 158



140-142

	Order no.	Description	
HOSE TRACK SYSTEM HIGH-PRESSURE CLEANERS			
Cable trolley	127 6.541-026.0	Cable trolley for C-rail profile. 20 kg capacity. Weight 0.11 kg. Galvanised steel ball bearing.	<input type="checkbox"/>
End bracket	128 6.541-028.0	End bracket	<input type="checkbox"/>
Handle	129 6.541-029.0	C-rail profile clamp. Galvanised steel. Plastic clamping parts. Weight 0.06 kg.	<input type="checkbox"/>
Wall bracket	130 6.541-039.0	Wall holder for galvanised steel C-rail profile.	<input type="checkbox"/>
Rail holder wall	131 6.541-012.0	Galvanised steel rail bracket for C-rail profile. Weight 0.235 kg.	<input type="checkbox"/>
Spray lance runner, movable	132 4.042-610.0	moveable	<input type="checkbox"/>
SEALS FOR TRAPEZOIDAL THREAD			
Gasket set with 9x O-rings for TR thread	133 2.880-001.0		<input type="checkbox"/>
NOZZLE UNION / SPACER			
Nozzle union			
Nozzle screws	134 4.112-011.0	Nozzle screws with protectors for high-pressure and power nozzles	<input type="checkbox"/>
Nozzle connector	135 5.401-210.0	For protecting and connecting Kärcher power nozzles to spray lances (M 18 × 1.5 IG).	<input type="checkbox"/>
Nozzle union food industry	136 5.401-318.0	Made of special brass alloy for use in the food industry.	<input type="checkbox"/>
HIGH-PRESSURE HOSES			
Standard			
High-pressure hose, 20 m, ID 8, 315 bar, 1 × EASY!Lock / 1 × AVS-hose reel connection	137 6.110-011.0	High-pressure hose with AVS hose reel connection and EASY!Lock hand screw connection.	<input type="checkbox"/>
High-pressure hose, 15 m, ID 8, 315 bar, 1 × EASY!Lock / 1 × AVS-hose reel connection	138 6.110-018.0		<input type="checkbox"/>
High-pressure hose, 10 m, ID 8, 315 bar, 2 × EASY!Lock	139 6.110-019.0		<input type="checkbox"/>
High-pressure hose, 10 m, ID 8, 315 bar, 1 × M22 × 1.5 / 1 × AVS-hose reel connection	140 6.390-025.0	10 m high-pressure hose (M 22 × 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	<input type="checkbox"/>

Available accessories.

ACCESSORIES FOR HD 8/18-4 ST H 1.524-966.0



140-142



143, 149



144



145



146



147, 151, 154



148, 150, 152-153

	Order no.	Description		
HIGH-PRESSURE HOSES				
Standard				
High-pressure hose, 15 m, ID 8, 315 bar, 1 × M22 × 1.5 / 1 × AVS-hose reel connection	141	6.390-185.0	15 m high-pressure hose (M 22 × 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	<input type="checkbox"/>
High-pressure hose, 20 m, ID 8, 315 bar, 1 × M22 × 1.5 / 1 × AVS-hose reel connection	142	6.390-171.0	20 m high-pressure hose (M 22 × 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	<input type="checkbox"/>
Standard with unions on both sides				
High-pressure hose, 10 m, ID 10, 220 bar, 2 × EASY!Lock	143	6.110-041.0	Impressive values and basic equipment: 10 m long high-pressure hose (DN 10) developed for pressures up to 220 bar.	<input type="checkbox"/>
High-pressure hose, 10 m, ID 8, 315 bar, 2 × M22 × 1.5	144	6.391-342.0	To extend the operating radius with the high-pressure cleaner. Connection on both sides M22 × 1.5.	<input type="checkbox"/>
High-pressure hose, 15 m, ID 8, 315 bar, 2 × M22 × 1.5	145	6.390-010.0	With screw connections on both sides, M 22 × 1.5 with bend protection.	<input type="checkbox"/>
High-pressure hose, 10 m, ID 6, 300 bar, 2 × EASY!Lock	146	6.110-056.0	High-pressure hose (DN 6) equipped with ANTI!Twist and the new EASY!Lock manual screw fitting on both sides. For pressures up to 300 bar. 10 m long.	<input type="checkbox"/>
High-pressure hose, 20 m, ID 8, 315 bar, 2 × M22 × 1.5	147	6.390-031.0	Screw connections at both ends, M 22 × 1.5, with kink protection.	<input type="checkbox"/>
High-pressure hose, 10 m, ID 8, 315 bar, 2 × EASY!Lock	148	6.110-031.0	High-pressure hose (DN 8) suitable up to 315 bar pressure. With innovative EASY!Lock manual screw fitting on both sides, ANTI!Twist and 10 m long.	<input type="checkbox"/>
High-pressure hose, 15 m, ID 8, 315 bar	149	6.110-033.0	15 m long high-pressure hose, DN 8, with ANTI!Twist and equipped with time-saving EASY!Lock manual screw fitting on both sides.	<input type="checkbox"/>
High-pressure hose, 15 m, ID 8, 315 bar, 2 × EASY!Lock	150	6.110-030.0	15 m long high-pressure hose, DN 8, with ANTI!Twist and time-saving EASY!Lock manual screw fitting on both sides.	<input type="checkbox"/>
High-pressure hose, 15 m, ID 10, 220 bar, 2 × M22 × 1.5	151	6.390-023.0	Connectors at both ends, M 22 × 1.5, with kink protection.	<input type="checkbox"/>
High-pressure hose, 20 m, ID 8, 315 bar, 2 × EASY!Lock	152	6.110-032.0	20 m long high-pressure hose (DN 8) equipped with the time-saving and robust EASY!Lock manual screw fitting on both sides. Approved for pressures up to 315 bar.	<input type="checkbox"/>
High-pressure hose, 30 m, ID 8, 315 bar, 2 × EASY!Lock	153	6.110-014.0	Comfortable length (30 m) and innovative EASY!Lock manual screw fitting: High-pressure hose (DN 8) with ANTI!Twist for pressures up to 315 bar.	<input type="checkbox"/>
High-pressure hose, 20 m, ID 10, 220 bar, 2 × EASY!Lock	154	6.110-043.0	20 m in length and the extremely time-saving and comfortable EASY!Lock manual screw fitting on both sides are some of the main features of this high-pressure hose (DN 10).	<input type="checkbox"/>

Available accessories.

ACCESSORIES FOR HD 8/18-4 ST H 1.524-966.0



	Order no.	Description	
HIGH-PRESSURE HOSES			
Standard with unions on both sides			
High-pressure hose, 25 m, ID 10, 220 bar, 2 × EASY!Lock	155	6.110-044.0	Impressive values and basic equipment: 25 m long high-pressure hose (DN 10) developed for pressures up to 220 bar. <input type="checkbox"/>
High-pressure hose, 40 m, ID 10, 220 bar, 2 × EASY!Lock	156	6.110-045.0	40 m long high-pressure hose with EASY!Lock system for the time-saving manual screw connection (both sides). Nominal size (DN) 10, working pressure up to 220 bar. <input type="checkbox"/>
High-pressure hose, 15 m, ID 12, 210 bar, 2 × EASY!Lock	157	6.110-059.0	Designed for working pressures up to 250 bar: High-pressure hose (DN 12) with a length of 15 m. Has the comfortable EASY!Lock manual screw fitting on both sides. <input type="checkbox"/>
High-pressure hose, 40 m, ID 12, 210 bar, 2 × EASY!Lock	158	6.110-060.0	With EASY!Lock manual screw fitting and lots of room for manoeuvre thanks to 40 m in length: High-pressure hose (DN 12) with EASY!Lock manual screw fitting on both sides. Suitable for working pressures up to 250 bar. <input type="checkbox"/>
Longlife 400			
High-pressure hose Longlife, 20 m, ID 8, 400 bar, 1 × EASY!Lock / 1 × AVS-hose reel connection	159	6.110-028.0	20 m high-pressure hose (ID 8), for up to 400 bar pressure. With AVS hose reel connection and double steel reinforcement. EASY!Lock hand screw connection at other end of the hose. <input type="checkbox"/>
High-pressure hose Longlife, 40 m, ID 8, 400 bar, 1 × EASY!Lock / 1 × AVS-hose reel connection	160	6.110-076.0	High-pressure hose with 2-compartment steel insert, AVS hose reel connection, as well as EASY!Lock manual screw connection. <input type="checkbox"/>
High-pressure hose Longlife, 20 m, ID 8, 400 bar, 1 × M22 × 1.5 / 1 × AVS-hose reel connection	161	6.390-208.0	20 m high-pressure hose Longlife 400 (DN 8) with patented (rotating) AVS trigger gun connector and manual coupling. Two layer high-strength steel wire reinforced. <input type="checkbox"/>
Longlife 400 with unions on both sides			
High-pressure hose Longlife, 1.5 m, ID 8, 400 bar, 2 × EASY!Lock	162	6.110-024.0	1.5 m short high-pressure hose (DN 8). Comfortable EASY!Lock manual screw fitting on both sides for robust and quick connections. Durable and designed for up to 400 bar pressure. <input type="checkbox"/>
High-pressure hose Longlife, 1.5 m, ID 8, 400 bar, 1 × EASY!Lock / 1 × M22 × 1.5	163	6.110-069.0	1.5 m long high-pressure hose (DN 8) suitable for up to 400 bar pressure with double steel core. Connections: M 22 × 1.5, as well as the comfortable and quick EASY!Lock manual screw fitting. <input type="checkbox"/>
High-pressure hose Longlife, 1.5 m, ID 8, 400 bar, 2 × M22 × 1.5	164	6.390-178.0	1.5 m high-pressure hose (DN 8, M 22 × 1.5) with kink protection and connectors at both ends. For connecting to hose reels with appropriate connector (M 22 × 1.5). <input type="checkbox"/>
High-pressure hose Longlife, 10 m, ID 8, 400 bar, 2 × EASY!Lock	165	6.110-038.0	Durable, 10 m long high-pressure hose (DN 8) with double steel core and EASY!Lock manual screw fitting on both sides and ANTI!Twist. Approved for 400 bar pressure. <input type="checkbox"/>
High-pressure hose Longlife, 30 m, ID 8, 400 bar, 2 × EASY!Lock	166	6.110-023.0	Robust high-pressure hose with double steel core, ANTI!Twist and EASY!Lock manual screw fitting on both sides. Nominal size DN 8, 30 m long, for up to 400 bar pressure. <input type="checkbox"/>
High-pressure hose Longlife, 10 m, ID 8, 400 bar, 2 × M22 × 1.5	167	6.391-354.0	To extend the operating radius with the high-pressure cleaner. Connection on both sides M22 × 1.5. <input type="checkbox"/>
High-pressure hose Longlife, 20 m, ID 8, 400 bar, 2 × EASY!Lock	168	6.110-027.0	High-pressure hose with ANTI!Twist, EASY!Lock manual screw fittings and double steel core. 20 m long, nominal size DN 8, EASY!Lock manual screw fitting on both sides. <input type="checkbox"/>

Available accessories.

ACCESSORIES FOR HD 8/18-4 ST H 1.524-966.0



	Order no.	Description		
HIGH-PRESSURE HOSES				
Longlife 400 with unions on both sides				
High-pressure hose Longlife, 15 m, ID 8, 400 bar, 2 × EASY!Lock	169	6.110-029.0	The double steel core ensures a particularly long life of this 15 m long high-pressure hose (DN 8), which is approved for pressures up to 400 bar.	<input type="checkbox"/>
High-pressure hose Longlife, 20 m, ID 8, 400 bar, 2 × M22 × 1.5	170	6.390-027.0	with rotary coupling, 2 × M 22 × 1.5	<input type="checkbox"/>
Food industry version				
High-pressure hose food grade, 15 m, ID 6, 250 bar, 1 × M22 × 1.5 / 1 × AVS-hose reel connection	171	6.391-654.0	15 m high-pressure hose (DN 6) with patented (rotating) AVS trigger gun connector. Non-discolouring outer layer for use in the food industry. DN 6/155°C/250 bar.	<input type="checkbox"/>
Food industry version with unions on both sides				
High-pressure hose food grade, 10 m, ID 8, 250 bar, 2 × EASY!Lock	172	6.110-051.0	High-pressure hose (ID 6), 10 m long, with grey, non-marking outer covering. Approved for use in the food industry. With quick and robust EASY!Lock hand screw connection at both ends.	<input type="checkbox"/>
High-pressure hose food grade, 20 m, ID 8, 250 bar, 2 × EASY!Lock	173	6.110-052.0	Suitable for use in food industry: 20 m long high-pressure hose (ID 8) with grey, non-marking outer covering, ANTI!Twist and EASY!Lock hand screw connections.	<input type="checkbox"/>
High-pressure hose food grade, 10 m, ID 8, 250 bar, 2 × M22 × 1.5	174	6.389-479.0	10 m high-pressure hose (DN 8) with patented (rotating) AVS trigger gun connector. Non-discolouring outer layer for use in the food industry. M 22 × 1.5 with anti-kink sleeve.	<input type="checkbox"/>
High-pressure hose food grade, 20 m, ID 8, 250 bar, 2 × M22 × 1.5	175	6.389-581.0	20 m high-pressure hose (DN 8) with swivel coupling. Non-discolouring outer layer for use in the food industry. Connectors at both ends, M 22 × 1.5, with kink protection. NW 8/155°C/250 bar.	<input type="checkbox"/>
Longlife food design				
High-pressure hose food grade, 20 m, ID 8, 400 bar, 1 × EASY!Lock / 1 × AVS-hose reel connection	176	6.110-075.0		<input type="checkbox"/>
Longlife food design with screw connections at both ends				
High-pressure hose food grade Longlife, 10 m, ID 8, 400 bar, 2 × EASY!Lock	177	6.110-053.0	With blue, non-marking and animal fat resistant outer covering: durable high-pressure hose (ID 8), 10 m long, ANTI!Twist and EASY!Lock hand screw connection at both ends.	<input type="checkbox"/>
High-pressure hose food grade Longlife, 20 m, ID 8, 400 bar, 2 × EASY!Lock	178	6.110-054.0	Durable high-pressure hose with double steel reinforcement and blue, non-marking and animal fat resistant outer covering, 20 m long with EASY!Lock hand screw connections.	<input type="checkbox"/>
Special hoses				
High-pressure hose Ex, 10 m, ID 8, 400 bar, 2 × EASY!Lock	179	6.110-064.0	Electrically conductive, 10 m long high-pressure hose for use in hazardous areas. 10 m long high-pressure hose with EASY!Lock hand screw connections at both ends.	<input type="checkbox"/>
High-pressure hose curved, 1.5 m, ID 8, 400 bar, 1 × EASY!Lock / 1 × M22 × 1.5	180	6.110-068.0	For connection to hose reels: high-pressure hose, with M 22 × 1.5 connection and curved EASY!Lock hand screw connection. 1.5 m long, suitable for up to 400 bar working pressure.	<input type="checkbox"/>
High-pressure hose curved, 1.5 m, ID 8, 400 bar, 2 × M22 × 1.5	181	6.388-886.0	Connection hose in longlife quality with 2x M22 × 1.5, with angled connection on one side.	<input type="checkbox"/>
Ultra Guard				
High-pressure hose Ultra Guard, 20 m, ID 8, max. 315 bar	182	6.110-083.0	Ultra Guard high-pressure hose with smooth and extremely hard-wearing coating. Robust hose line for maximum service life in the toughest conditions.	<input type="checkbox"/>

Available accessories.

ACCESSORIES FOR HD 8/18-4 ST H 1.524-966.0



	Order no.	Description	
HIGH-PRESSURE HOSES			
Classic			
High-pressure hose Classic, 10 m, ID 8, 315 bar x , EASY!Lock	183	4.119-005.0	High pressure hose with convenient EASY!Lock manual fitting from the Classic series by Kärcher. Also suitable for hot water high-pressure cleaners. <input type="checkbox"/>
PIPE CLEANING			
Pipe cleaning hose, ID 6			
Pipe cleaning hose, ID 6, 10 m, max. 250 bar	184	6.110-046.0	The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8). <input type="checkbox"/>
Pipe cleaning hose, ID 6, 20 m, max. 250 bar	185	6.110-008.0	The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8). <input type="checkbox"/>
Pipe cleaning hose, ID 6, 30 m, max. 250 bar	186	6.110-047.0	The 30 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8). <input type="checkbox"/>
Pipe cleaning hose, DN 6, 20 m, max. 250 bar	187	6.390-030.0	The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8). <input type="checkbox"/>
Pipe cleaning hose, ID 6, 10 m, max. 140 bar	188	6.110-048.0	10 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle). <input type="checkbox"/>
Pipe cleaning nozzle			
Pipe cleaning dirt blaster D21/040	189	4.765-001.0	The forward-tilted rotating pencil jet removes the most stubborn dirt. The three backwards-tilted jets ensure the necessary forward movement, as well as convenient handling. <input type="checkbox"/>
Pipe cleaning dirt blaster D30/040	190	4.765-004.0	<input type="checkbox"/>
Pipe cleaning nozzle	191	5.763-015.0	16 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes. <input type="checkbox"/>
	192	5.763-016.0	<input type="checkbox"/>
	193	5.763-017.0	Pipe cleaning nozzle with inner thread. Different spray directions. The hose moves freely through the pipe. (R 1/8" connection, 3 x 30° backwards, diameter 30 mm.) <input type="checkbox"/>
Rotating pipe cleaning nozzle	194	6.415-428.0	Pipe cleaning nozzle with four rotating jets and inner thread. Different spray directions. The hose moves freely through the pipe. With R 1/8" connection. <input type="checkbox"/>
	195	6.415-440.0	Rotating pipe cleaning nozzle with internal thread and four rotating jets for environmentally-friendly cleaning of blocked drains and pipes. <input type="checkbox"/>
FLOOR AND HARD SURFACE CLEANER			
Hard Surface Cleaner FRV 30			
FRV 30 Surface Cleaner	196	2.111-010.0	With the integrated, automatic suction of the dirty water, the FRV 30 makes surface cleaning even more efficient and can be used in both inside and outside areas. There is no longer a need to rinse the surface after cleaning, since the dirty water can be discharged through the 5 m suction hose supplied. Additional quality features are the non-marking steering rollers and double ceramic bearing. Machine-specific nozzle kit must be ordered separately. Max. 250 bar / 1000 l/h / 60°C. <input type="checkbox"/>

Available accessories.

ACCESSORIES FOR HD 8/18-4 ST H 1.524-966.0



		Order no.	Description	
FLOOR AND HARD SURFACE CLEANER				
Hard Surface Cleaner FRV 30				
FRV 30 surface cleaner	197	2.642-999.0	With the integrated and automatic suction of the dirty water, the FRV 30 makes surface cleaning even more efficient. There is no longer a need to rinse the surface after cleaning, as the dirty water can be removed through the 5m suction hose, which is supplied. Additional features include the non-marking steering rollers and double ceramic bearings. Machine specific nozzle kit must be ordered separately.	<input type="checkbox"/>
Extension hose 5 m	198	4.440-939.0	5m extension hose for FRV 30. Connection sleeve included.	<input type="checkbox"/>
Hard surface cleaner FR 30				
FR 30 Surface Cleaner	199	2.111-011.0	Up to 10 times greater area performance compared with the conventional high-pressure jet. Plastic casing for optimal manoeuvrability, double ceramic bearing for long working times, flexible connection joint for optimal handling and integrated parking position. Machine-specific nozzle kit must be ordered separately. Max. 180 bar / 850 l/h / 60°C.	<input type="checkbox"/>
Surface Cleaner FR 30	200	2.642-997.0	Up to 10 times greater area coverage compared with the conventional high pressure jet. Plastic casing for optimal manoeuvrability, double ceramic bearing for long working times, flexible connection joint for ergonomic handling and integrated parking position. Machine specific nozzle kit must be ordered separately.	<input type="checkbox"/>
FR 30 Me surface cleaner				
Hard Surface Cleaner FR 30 Me	201	2.111-013.0	Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry.	<input type="checkbox"/>
Hard surface cleaner FR 30 Me	202	2.640-355.0		<input type="checkbox"/>
Hard Surface Cleaner FR 50				
Surface Cleaner FR 50 Me	203	2.111-023.0	Hot water resistant stainless steel surface cleaner with 500 mm working width. Ideal for large areas. With double ceramic bearings, push handle, non-marking swivel castors and detergent dosing system.	<input type="checkbox"/>
Hard surface cleaner FR 50	204	2.640-679.0		<input type="checkbox"/>
Machine-specific nozzle kits for FR				
Nozzle kit for FR, 650 l/h - 850 l/h	205	2.639-187.0	Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (650 to 850 l/h).	<input type="checkbox"/>
Machine-specific nozzle kits for FRV				
Nozzle kit for FRV, 045	206	2.642-432.0	Machine-specific nozzle kit with Kärcher power nozzles and jet nozzle for FRV 30.	<input type="checkbox"/>
Nozzle kit for FRV, 050	207	2.642-433.0		<input type="checkbox"/>
FRV 30 Me surface cleaner				
FRV 30 Me Surface Cleaner	208	2.111-012.0	Thanks to automatic suction of the dirty water, the stainless steel FRV 30 Me Surface Cleaner makes surface cleaning more efficient in both inside and outside areas. Hot water cleaning up to 85°C.	<input type="checkbox"/>
FRV 30 Me	209	2.642-911.0		<input type="checkbox"/>
Extension hose FRV 30 Me and FRV 50 Me	210	4.441-040.0	5 m extension hose for FRV 30 Me. Includes connecting adapter.	<input type="checkbox"/>

Available accessories.

ACCESSORIES FOR HD 8/18-4 ST H 1.524-966.0



	Order no.	Description		
FLOOR AND HARD SURFACE CLEANER				
Surface Cleaner FR 50 Me				
FRV 50 Me surface cleaner	211	2.111-024.0	Surface cleaning with automatic suction of the dirty water for very large surfaces - this means the FRV 50 Me. Hot water cleaning up to 85°C. The FRV 50 Me features a temperature-resistant 10 m polyurethane suction hose. Additional quality features are the non-marking steering rollers and double ceramic bearing. Machine-specific nozzle kit must be ordered separately. Max. 250 bar / 2000 l/h / 85°C.	<input type="checkbox"/>
FRV 50 ME	212	2.643-598.0	Thanks to automatic suction of the waste water, the stainless steel FRV 50 Me surface cleaner makes surface cleaning more efficient in both inside and outside areas. Hot water cleaning up to 85 °C. The FRV 50 Me features a temperature-resistant 7.5 m polyurethane suction hose. Additional quality features are the non-marking steering rollers and double ceramic bearing. Machine-specific nozzle kit must be ordered separately. Max. 250 bar / 1,300 l/h / 85 °C.	<input type="checkbox"/>
FOAM SYSTEMS				
Cup foam lance				
Cup foam lance Advanced 2, 700 l/h - 800 l/h	213	4.112-064.0	Developed for Kärcher high-pressure cleaners without servo control: The cup foam lance Advanced 2 impresses with a main body made of Ecobross for use with aggressive cleaning agents.	<input type="checkbox"/>
Two-litre cleaning agent container for DUO Advanced foam lance	214	4.112-066.0	The additional two-litre container enables detergent to be changed quickly with the Kärcher Basic, Advanced and DUO Advanced cup foam lance.	<input type="checkbox"/>
Cup foam lance DUO Advanced 2, 700 l/h - 800 l/h	215	4.112-068.0	For pressure washers without Servo Control: The DUO Advanced 2 cup foam lance is impressive with its option for direct switching to high-pressure cleaning and two-litre detergent tank.	<input type="checkbox"/>
Cup foam lance Basic 2, 700 l/h - 800 l/h	216	4.112-054.0	Newly developed, very robust Basic 2 cup foam lance especially for high-pressure cleaners with a flow rate of 700-800 l/h. For excellent foam quality with half the cleaning agent consumption.	<input type="checkbox"/>
Cup foam lance Advanced	217	6.394-969.0	Short, handy foam lance with adjustable spray angle with 1 litre detergent tank. Ideal for cleaning cars due to its compact design.	<input type="checkbox"/>
1-litre cleaning agent container for cup foam lance basic	218	5.071-414.0	For the quick change of the cleaning agent: Additional 1 litre cleaning agent container for basic foam lance (2.112-053.0, 2.112-054.0 and 2.112-055.0).	<input type="checkbox"/>
Cup foam lance, 1200 l/h -	219	6.394-668.0	Short, handy foam lance with adjustable spray angle with 1 litre detergent tank. Ideal for cleaning cars due to its compact design.	<input type="checkbox"/>
1-litre cleaning agent container for cup foam lance advanced	220	6.414-050.0	Additional 1-litre cleaning agent container for quick replacement of the cleaning agent (for foam lance 2.112-017.0 and 2.112-018.0).	<input type="checkbox"/>
Inno Foam Kit				
Inno Foam Set with detergent injector	221	2.112-000.0	High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or disinfection.	<input type="checkbox"/>
Inno Foam Set	222	2.112-008.0		<input type="checkbox"/>
Inno Foam Set with detergent injector	223	2.640-151.0		<input type="checkbox"/>
Inno Foam Set	224	2.640-692.0		<input type="checkbox"/>

Available accessories.

ACCESSORIES FOR HD 8/18-4 ST H 1.524-966.0



		Order no.	Description	
FOAM SYSTEMS				
Easy Foam Set				
Easy Foam Set with RM injector	225	2.112-010.0	HP foam system for use with HD/HDS units for cleaning and disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine specific nozzle kit has to be ordered separately.	<input type="checkbox"/>
	226	2.640-691.0		<input type="checkbox"/>
Easy Foam Set	227	2.640-693.0		<input type="checkbox"/>
Nozzle kits for Inno/Easy Foam Set				
Nozzle kit 090 for Inno / Easy Set 700-1,000 l/h	228	2.111-019.0	Nozzle kit contains Kärcher power nozzles and nozzle inserts. For Inno/Easy-Foam set 700-1000 l/h. For optimal foam system performance.	<input type="checkbox"/>
	229	2.640-688.0		<input type="checkbox"/>
MIXERS AND INJECTORS				
Cleaning agent injector				
Cleaning agent injector for high and low pressure (without nozzles)	230	4.637-032.0	Detergent injector for independent high and low pressure dosage. Maximum dosage about 15%.	<input type="checkbox"/>
	231	3.637-001.0		<input type="checkbox"/>
Nozzle insert with order no. 4.637-032.0				
Nozzle insert up to 1,100 l/h - high pressure	232	4.769-003.0	Nozzle insert for detergent injector 3.637-001 for high-pressure detergent application. For high-pressure cleaners with a water flow rate up to 1100 l/h.	<input type="checkbox"/>
Nozzle insert up to 1,100 l/h - low pressure	233	4.769-001.0	For low pressure with machines up to 1.100 l/h	<input type="checkbox"/>
COUPLING PARTS				
Rotary coupling				
Rotary coupling	234	4.111-021.0	Reliably prevents twisting of HP hoses. Connection Easy!Lock. Handle protection	<input type="checkbox"/>
	235	4.401-091.0	Reliably prevents twisting of HP hoses. Connection M 22 × 1.5 m. Handle protection	<input type="checkbox"/>
Coupling				
Coupler -2 × M22 × 1,5	236	4.403-002.0	For connecting and extending high-pressure hoses. Connection 2 × M 22 × 1.5.	<input type="checkbox"/>
Connector				
Screw socket for surface cleaners and Servo Control controllers	237	4.111-022.0	For attaching high-pressure nozzles and accessory parts to the HD trigger gun (with nozzle screws) - 1 × M 22 × 1.5/1 × M 18 × 1.5.	<input type="checkbox"/>
Y distributor	238	4.111-024.0	Offers the option to connect two spray units to the machine. Installation on the high pressure outlet.	<input type="checkbox"/>

Available accessories.

ACCESSORIES FOR HD 8/18-4 ST H 1.524-966.0



		Order no.	Description	
COUPLING PARTS				
Connector				
Short spray unit	239	4.111-038.0	For attaching high-pressure nozzles and accessory parts to HP trigger gun (with nozzle screws). Not compatible with triple nozzles.	<input type="checkbox"/>
Y distributor	240	4.405-048.0	Offers the option to connect two spray units to the machine. Installation on the high pressure outlet.	<input type="checkbox"/>
EASY!Lock adapter				
Adapter 1 M22AG-TR22AG	241	4.111-029.0	Adapter 1 to connect the old hose with the new hose	<input type="checkbox"/>
Adapter 2 M22IG-TR22AG	242	4.111-030.0	Adapter 2 to connect the old device with the new hose and the old gun with the new hose	<input type="checkbox"/>
Adapter 3 M22IG-TR22AG	243	4.111-031.0	Adapter 3 to connect the old gun with the new spray lance and new servo regulator	<input type="checkbox"/>
Adapter 4 TR22IG-D11	244	4.111-032.0	Adapter 4 to connect the new gun with the old swivel hose	<input type="checkbox"/>
Adapter 5 TR22IG-M22AG	245	4.111-033.0	Adapter 5 to connect the new gun with the old spray lance and new servo regulator with the old spray lance	<input type="checkbox"/>
Adapter 6 TR22IG-M22AG	246	4.111-034.0	Adapter 6 to connect the new device with the old hose and the old hose with the new gun	<input type="checkbox"/>
Adapter 7 M18IG-TR20AG	247	4.111-035.0	Adapter 7 to connect the old spray lance with the new nozzle	<input type="checkbox"/>
Adapter 8 TR20IG-M18AG	248	4.111-036.0	Adapter 8 to connect the new spray lance with the old nozzle	<input type="checkbox"/>
Adapter hose extension 9 TR	249	4.111-037.0	Adapter 9 to connect the new hose with the new hose	<input type="checkbox"/>
Adapter 12 rotary coupling EASY!Lock 22 IG - M22 x 1.8 AG	250	4.111-046.0	Rotatable adapter for connecting EASY!Force high-pressure gun and high-pressure hoses with M 22x1.5 connection	<input type="checkbox"/>
HOSE REELS				
Automatic, self-winding hose reels for wall mounting				
Automatic hose reel, powder-coated steel / plastic, 20 m	251	6.392-074.0	Automatic hose reel for 20 m high-pressure hose. The console is made from powder-coated steel, the drum is made from plastic.	<input type="checkbox"/>
Automatic stainless steel / synthetic material hose drum, 20 m	252	6.392-083.0	Automatic hose reel for 20 m high-pressure hose. The console consists of stainless steel, the drum is made from plastic.	<input type="checkbox"/>

Available accessories.

ACCESSORIES FOR HD 8/18-4 ST H 1.524-966.0



	Order no.	Description	
HOSE REELS			
Automatic, self-winding hose reels for wall mounting			
Automatic hose reel, coated, 20 m	253	6.392-106.0	Automatic hose reel of durable plastic. Painted steel bracket. Suitable for 20 m high-pressure hose. <input type="checkbox"/>
Hose reel, automatic, basalt grey-coated, 20 m	254	6.392-105.0	Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses. For example: order no. 6.110-011.0 (ID 8, 20 m, 315 bar) or order no. 6.110-028.0 (ID 8, 20 m, 400 bar Longlife). <input type="checkbox"/>
Automatic hose reel, stainless steel, includes swivel holder, 20 m	255	6.392-076.0	Automatic stainless steel hose reel. With swivel holder. Suitable for 20 m high-pressure hose. <input type="checkbox"/>
Automatic stainless steel hose reel, 40 m	256	6.392-442.0	Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses. Compatible high-pressure hose, e.g. order no. 6.110-076.0 (ID 8, 40 m, 400 bar, 1x hose reel connection attachment kit). <input type="checkbox"/>
WATER CONNECTION			
Geka coupling			
Geka connector with hose barb, R 1/2"	257	6.388-461.0	with hose liner <input type="checkbox"/>
Geka connector with hose barb, R 3/4"	258	6.388-455.0	<input type="checkbox"/>
Geka connector with hose barb, R 1"	259	6.388-465.0	with hose barb <input type="checkbox"/>
Geka connector with inner thread, R 3/4"	260	6.388-473.0	with female thread <input type="checkbox"/>
Geka connector with internal thread, R 1"	261	6.388-458.0	<input type="checkbox"/>
STATIONARY HIGH-PRESSURE CLEANING SYSTEMS			
Add-on kit cleaning agents double	262	2.209-006.0	The attachment kit makes it easy to dose a second detergent by remote control. <input type="checkbox"/>
Add-on kit pressure discharge	263	2.209-007.0	Attachment kit for automatic pressure relief for stationary cold and hot water high-pressure cleaners. For effective protection of the high-pressure system. <input type="checkbox"/>
Attachment kit with hour counter and pressure gauge	264	2.209-008.0	Attachment kit with hour counter and pressure gauge for stationary cold and hot water high-pressure cleaners. For easy control of the machine's operating time and operating pressure. <input type="checkbox"/>
Steel wall bracket, complete	265	2.209-009.0	The wall bracket enables easy and safe installation of a stationary high-pressure cleaner (cold or hot water) on the wall. <input type="checkbox"/>
Water inlet solenoid valve attachment kit	266	2.209-010.0	Water inlet solenoid valve attachment kit for stationary cold and hot water high-pressure cleaners. The solenoid valve automatically closes the water supply to the high-pressure cleaner when the machine is at a standstill. <input type="checkbox"/>

Available accessories.