

BRUSH SOFT

For simple installation on telescopic lances or high-pressure lances from Kärcher: brush with soft bristles for deep cleaning of sensitive surfaces such as glass or solar systems.



Order no. **6.960-135.0**

Technical data

EAN code		4054278824369
Inlet temperature	°C	max. 40
Connection thread		M 18
Colour		blue
Weight incl. packaging	kg	1.2



Easy-to-understand colour coding

- The colour coding facilitates the selection of the appropriate brush.


Versatile fields of application

- Integrated high-pressure nozzle for using the brush with a high-pressure cleaner.
- Incl. 2 nozzles and 1 connection piece for use with pure water.
- With 4 nozzle connections for optimal water application.

COMPATIBLE MACHINES

- | | | |
|---------------------------|---------------------|-----------------------------|
| ■ HD 1.8/13 C Ed | ■ HD 7/15 G | ■ HDS 5/13 U |
| ■ HD 10/21-4 S | ■ HD 7/17 M | ■ HDS 6/14 C |
| ■ HD 10/23-4 S | ■ HD 728 B Cage | ■ HDS 7/11-4 M |
| ■ HD 10/25-4 S | ■ HD 8/18-4 M | ■ HDS 7/16 C |
| ■ HD 2.3/14 C Ed Food | ■ HD 8/20 G | ■ HDS 8/18-4 C |
| ■ HD 3.5/30-4 S Ea | ■ HD 9/21 G | ■ HDS 8/18-4 C Classic |
| ■ HD 4/11 C Bp | ■ HD 9/23 De | ■ HDS 8/20 De |
| ■ HD 4/9 P | ■ HD 9/23 G | ■ HDS 8/20 G |
| ■ HD 5/11 E Classic | ■ HDS 1.7/12 U Ed | ■ HDS 9/18-4 M |
| ■ HD 5/11 EX Plus Classic | ■ HDS 10/20-4 M | ■ HDS-E 3.3/25-4 M Ec 24 kW |
| ■ HD 5/12 C | ■ HDS 1000 Be | ■ PRO HD 400 Ed |
| ■ HD 5/13 E Classic | ■ HDS 1000 De | ■ Telescopic lance TL 10 C |
| ■ HD 5/13 EX Plus Classic | ■ HDS 1000 De Weed | ■ Telescopic lance TL 10 H |
| ■ HD 5/17 C | ■ HDS 12/18-4 S | ■ Telescopic lance TL 14 C |
| ■ HD 5/17 CX | ■ HDS 3.5/30-4 M Ea | ■ Telescopic lance TL 7 F |
| ■ HD 6/13 C | ■ HDS 4.0/20-4 M Ea | ■ Telescopic lance TL 7 H |
| ■ HD 6/15 M | ■ HDS 4.5/22-4 M Ea | |

ACCESSORIES FOR BRUSH SOFT
6.960-135.0

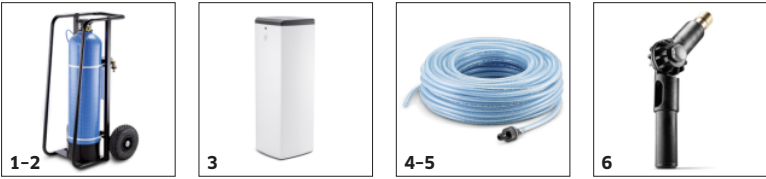

		Order no.	Description	
FACADE AND SOLAR PANEL CLEANING				
Water softening				
WS 50	1	6.368-463.0	The mobile WS 50 water softening unit prevents lime residue from forming on cleaned surfaces. This is achieved by an ion-exchange resin that removes the dissolved limescale from the water.	<input type="checkbox"/>
WS 100	2	6.368-464.0	The mobile WS 100 water softening unit prevents lime residue from forming on cleaned surfaces. This is achieved by an ion-exchange resin that removes the dissolved limescale from the water.	<input type="checkbox"/>
WS Regenerator	3	6.368-465.0	With the WS Regenerator regeneration system, the softening cartridges of the water softening units WS 50 and WS 100 can be backflushed and regenerated at the push of a button.	<input type="checkbox"/>
Hoses				
Water hose 25 m	4	6.392-578.0	Water hose (25 m) for water connection to brushes mounted on telescopic lances for window, façade and solar power installation cleaning.	<input type="checkbox"/>
Water hose 50 m	5	6.392-579.0	50-metre transparent water hose as supply line for the brushes mounted on telescopic lances for window, façade and solar power installation cleaning.	<input type="checkbox"/>
Attachment kits and adapters				
Angle joint	6	4.802-048.0	Up to 180° variable angle joint for connecting telescopic lances and brushes when cleaning facades, windows or solar panels.	<input type="checkbox"/>

☐ Available accessories. ☐ Detergents.