

IVR-L 100/24-2 TC ME

The industrial vacuum IVR-L 100/24-2 Tc Me in stainless steel version is suitable for vacuuming and separating liquids and solids – including corrosive media.









Order no.

9.987-886.0

- Tilting chassis
- Stainless steel containerVisual filling level indicator

Technical data

2	Technical data		
	EAN code		4054278275857
	Supply voltage	Ph / V / Hz	1 / 220 - 240 / 50 - 60
	Air flow	l/s / m³/h	148 / 532
	Vacuum	mbar / kPa	230 / 23
	Container content	1	100
	Container material		Stainless steel
	Rated input power	kW	2.4
	Vacuuming type		Electric
	Connection nominal diameter		ID 50
	Accessory nominal diameter		ID 50 / ID 40
	Main filter dust class		L
	Filter area for main filter	m²	0.45
	Weight without accessories	kg	58.8
	Weight (with accessories)	kg	59
	Weight incl. packaging	kg	59
	Dimensions (L × W × H)	mm	640 × 620 × 1060

Equipment	
Accessories included in the scope of delivery	no
Container emptying	Tilting chassis
Included in the scope of supply.	

Users must receive training on this device.





Ergonomic tilting chassis

- Sophisticated system for safe, manual, effortless emptying.
- Chassis system enables ergonomic tilted emptying using the roll-off mechanism.
- Quick and easy emptying of the container: just tip backwards and you are done!



High-quality stainless steel collection container

- Very easy to clean.
- Suitable for corrosive suction material.
- Transparent hose as filling level indicator and for draining liquids.



High robustness, flexibility and modularity

- Machine and chassis very robust and equipped with high wall thicknesses.
- Rotatable hose connection with up to 360° rotatable pipe bend.
- Optionally available with overfill protection, strainer or accessories holder.

ACCESSORIES FOR IVR-L 100/24-2 TC ME 9.987-886.0



12-13



14-15







10-11

		Order no.	Description		
OTHER ACCESSORIES					
Baffle plate Ø 517 mm	1	9.980-857.0	Baffle plate made from plastic with 517 mm diameter for containers and tanks.		
HANDLES					
Elbow aluminium 45° DN40	2	9.989-544.0	45° curved handle made from aluminium, DN 40.		
Elbow aluminium 45° DN50	3	9.989-547.0	Handle with 45° bend. Made from aluminium, DN 50.		
Handle DN 40	4	9.977-679.0	45° curved and electroconductive handle made from stainless steel. Inner cone DN 40.		
Handle DN50, curved	5	9.977-678.0	Electroconductive and 45° curved handle made from stainless steel. Inner cone DN 50.		
Stainless steel handle NW40	6	9.989-036.0	Curved and electroconductive handle made from stainless steel. Angle 45°, inner cone NW 40.		
Stainless steel handle NW50	7	9.988-111.0	Curved and electroconductive handle made from stainless steel. Angle 45°, inner cone NW 50.		
SUCTION TUBES					
Carbon suction tube 1500 mm DN40	8	9.989-552.0	Very light carbon extension tube, electroconductive, DN 40. Length: 1500 mm.		
Carbon suction tube 1500 mm DN50	9	9.989-553.0	Electroconductive, very light carbon extension tube. Inner cone DN 50, 1500 mm long.		
Suction tube 850 mm DN 40	10	9.977-525.0	Steel extension tube, electroconductive, DN 40. Length: 850 mm.		
Suction tube 850 mm DN 50	11	9.977-531.0	850 mm long extension tube made from steel. Electroconductive and with inner cone DN 50.		
Aluminium suction tube 1500 mm NW40	12	9.989-038.0	Aluminium extension tube, electroconductive, NW 40. Length: 1500 mm.		
Aluminium suction tube 1500 mm NW50	13	9.989-035.0	Electrically conductive suction tube (1500 mm) made of aluminium with 50 mm diameter.		
Stainless steel suction tube 850 mm NW40	14	9.989-039.0	Stainless steel extension tube, electroconductive, NW 40. Length: 850 mm.		

 \blacksquare Included in the scope of supply. $\hfill\square$ Available accessories.

ACCESSORIES FOR IVR-L 100/24-2 TC ME 9.987-886.0

28-29



		Order no.	Description	
SUCTION TUBES				
Stainless steel suction tube 850 mm NW50	15	9.988-114.0	Electroconductive extension tube made from stainless steel. Inner cone NW 50.	
ACCESORY SETS				
Accessory kit for liquids				
Liquid/solid accessory kit Expert DN40	16	9.990-878.0	Accessory kit DN40 for liquid vacuums: PU hose 3 m (9.989-617.0), handle (9.977-679.0), standarc nozzle (9.988-401.0), reducer (9.981-231.0), surface nozzle 120 mm (9.988-118.0).	
Liquid/solid accessory kit Expert DN50	17	9.990-879.0	Accessory kit DN50 for liquid vacuums: PU hose 3 m (9.989-619.0), handle (9.977-678.0), standard nozzle (9.988-402.0), surface nozzle 120 mm (9.988-119.0).	
Accessory kit for liquids/chips				
Oil/swarf accessory kit DN40 Expert	18	9.990-880.0	Accessory kit DN40 for liquid vacuum and swarf vacuum: 3 m ME-PU hose (9.989-621.0), handle (9.977-679.0), standard nozzle (9.989-674.0), reducer (9.981-231.0), surface nozzle (9.988-118.0).	
Oil/swarf accessory kit DN50 Expert	19	9.990-881.0	Accessory kit DN50 for liquid and swarf vacuum: ME-PU hose 3 m (9.989-623.0), handle (9.977-678.0), standard nozzle (9.989-673.0), surface nozzle (9.988-119.0).	
Advanced liquid floor cleaning set DN40	20	9.990-895.0	Advanced liquid floor cleaning set: EVA hose (9.990-925.0), handle (9.990-927.0), $2 \times$ suction tube (9.990-931.0), floor nozzle (9.990-937.0), standard nozzle (9.980-773.0).	
Advanced liquid floor cleaning set DN50	21	9.990-896.0	Advanced liquid floor cleaning set: EVA hose (9.990-926.0), handle (9.990-928.0), 2 × suction tube (9.990-932.0), floor nozzle (9.990-938.0), standard nozzle (9.980-761.0).	
NOZZLES				
Standard nozzles				
Standard PVC nozzle DN40	22	9.989-674.0	Electroconductive standard PVC nozzle. DN 40.	
Standard PVC nozzle DN50	23	9.989-673.0	Electroconductive standard PVC nozzle. DN 50.	
Standard nozzle silicone DN40	24	9.988-401.0	Stretchy standard nozzle made from silicone, inner cone DN 40.	
Standard nozzle silicone DN50	25	9.988-402.0		
Standard nozzle cuttable rubber DN40	26	9.989-677.0	Standard nozzle, electroconductive, made from cuttable rubber. DN 40.	
Standard nozzle cuttable rubber DN50	27	9.989-675.0	Standard nozzle, electroconductive, made from cuttable rubber. DN 50.	
Standard aluminium nozzle DN40	28	9.980-748.0	Diagonal nozzle made from anodised aluminium, electroconductive, DN 40.	

■ Included in the scope of supply. □ Available accessories.

26-27

24-25


ACCESSORIES FOR IVR-L 100/24-2 TC ME 9.987-886.0



		Order no.	Description	
NOZZLES				
Standard nozzles				
Standard aluminium nozzle DN50	29	9.980-749.0	Diagonal nozzle made from anodised aluminium, electroconductive, DN 50.	
Flexible standard nozzles				
Standard nozzle flexible PVC DN40	30	9.981-420.0	Electroconductive, flexible round nozzle made from galvanised steel, with rubber mouthpiece DN 30.	
Standard nozzle flexible PVC DN50	31	9.981-421.0	Electroconductive, flexible round nozzle made from galvanised steel, DN 50, with rubber mouthpiece DN 30.	
Standard nozzle, flexible, angled 90° PP DN40	32	9.981-429.0	Flexible, electroconductive angled nozzle, DN 40, length: 800 mm.	
Standard nozzle, flexible, angled 90° PP DN50	33	9.981-430.0	Flexible, electroconductive angled nozzle, DN 50, length: 800 mm.	
Floor nozzles				
Aluminium floor nozzle 370 mm DN40	34	9.989-683.0	Floor nozzle, 370 mm, made from aluminium. DN 40.	
Aluminium floor nozzle, el, 370 mm, DN40	35	9.989-682.0	Floor nozzle, 370 mm, made from aluminium. Electroconductive. DN 40.	
Aluminium floor nozzle 200 mm DN50	36	9.981-426.0	Floor nozzle, DN 50, with 200 mm suction width.	
Aluminium floor nozzle 370 mm DN50	37	9.989-664.0	Floor nozzle. 370 mm, made from aluminium. Electroconductive. DN 50.	
Aluminium floor nozzle, el, 370 mm, DN50	38	9.987-612.0	Electroconductive multi-purpose floor nozzle. 370 mm wide, DN 50.	
Aluminium floor nozzle 500 mm DN50	39	9.989-684.0	Floor nozzle, 500 mm, made from aluminium. Electroconductive. DN 50.	
Aluminium floor nozzle, el, 500 mm, DN50	40	9.981-925.0	Floor nozzle with 500 mm suction width and hinge. DN 50, electroconductive.	
Stainless steel floor nozzle el 370 mm DN40	41	9.989-558.0	Multi-purpose floor nozzle (370 mm), electroconductive, DN 40.	
Stainless steel floor nozzle el 370 mm DN50	42	9.988-115.0	Floor nozzle (370 mm) made from stainless steel, electroconductive, DN 50.	

 \blacksquare Included in the scope of supply. $\hfill\square$ Available accessories.

ACCESSORIES FOR IVR-L 100/24-2 TC ME 9.987-886.0

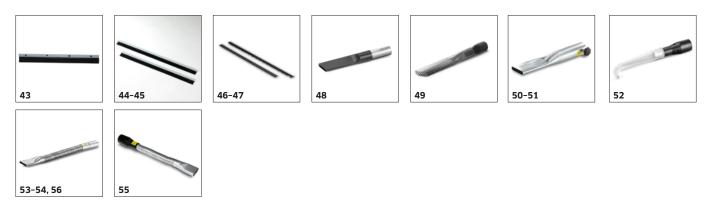

		Order no.	Description	
NOZZLES				
Floor nozzles				
Floor nozzle rubber strip oil-resistant. 220 mm	43	9.981-923.0	Squeegee with plastic strip for floor nozzle, 220 mm wide.	
Floor nozzle rubber strip 370 mm	44	9.981-914.0	Squeegee with profiled strip for floor nozzle, 370 mm wide.	
Floor nozzle rubber strip 500 mm	45	9.981-915.0	Oil-resistant squeegee with profiled strip for floor nozzle, 500 mm wide.	
Floor nozzle brush strip el. 370 mm	46	9.984-939.0	Electroconductive squeegee for floor nozzle, 370 mm wide.	
Floor nozzle brush strip 500 mm	47	9.980-764.0	Brush strip set for floor nozzle 500 mm, with profiled strip.	
Crevice nozzles				
Crevice nozzle PP 15 mm \times 145 mm DN50	48	9.988-117.0	Electroconductive, flat multi-purpose crevice nozzle made from plastic, DN 52.	
Crevice nozzle PU 22 mm × 175 mm DN50	49	9.981-482.0	Crevice nozzle made from PU, DN 50.	
Crevice nozzle 18 mm × 120 mm DN50	50	9.981-442.0	Electroconductive crevice nozzle made from sheet steel, DN 50, with 17 mm slot width.	
Crevice nozzle 25 mm × 120 mm DN50	51	9.981-465.0	Electroconductive crevice nozzle made from sheet steel, DN 50, with 25 mm slot width.	
Flexible crevice nozzles				
Flexible crevice nozzle silicone 65 mm DN50	52	9.988-403.0	Flexible crevice nozzle made from silicone, DN 50.	
Flexible crevice nozzle 11 mm × 58 mm DN40	53	9.989-681.0	Electroconductive and flexible crevice nozzle, 11 × 58 mm.	
Flexible crevice nozzle 20 mm × 45 mm DN40	54	9.981-423.0	Flexible and electroconductive crevice nozzle made from galvanised steel with 20 mm slot width, DN 40.	
Flexible crevice nozzle 12 mm × 45 mm DN50	55	9.981-424.0	Flexible, electroconductive galvanised crevice nozzle, DN 50, with 13 mm slot width.	
Flexible crevice nozzle 20 mm × 45 mm DN50	56	9.981-425.0	Flexible and electroconductive crevice nozzle made from galvanised steel with 20 mm slot width, DN 50.	

□ Available accessories.


ACCESSORIES FOR IVR-L 100/24-2 TC ME 9.987-886.0

68-69



70



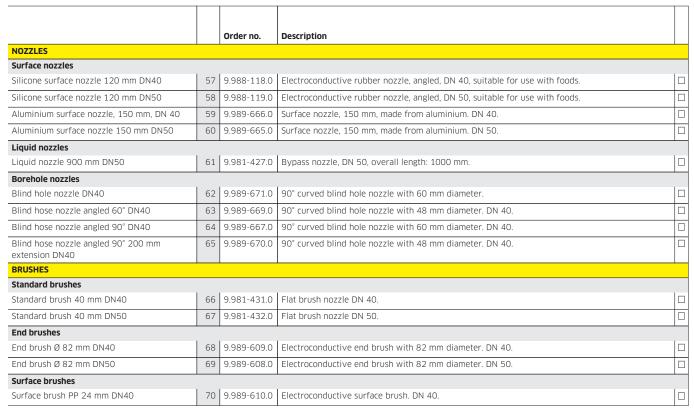

□ Available accessories.

66

67

ACCESSORIES FOR IVR-L 100/24-2 TC ME 9.987-886.0



		Order no.	Description	
BRUSHES				
Surface brushes				
Surface brush 300 mm DN40	71	9.981-911.0	Vacuum brush, 300 mm, with 45° connection, with star screw, horsehair bristles.	
Surface brush 300 mm DN50	72	9.981-912.0		
HOSES				
EVA hoses				
Hose EVA NW40 3 m	73	9.988-088.0	Electroconductive hose with NW 40. Suitable for temperatures up to 65°C. Length: 3 m.	
Hose EVA NW40 5 m	74	9.988-089.0	Five-metre-long, electroconductive hose with NW 40. Suitable for temperatures up to 65° C. Length 5 m.	ו: 🗆
Hose EVA NW50 3 m	75	9.988-090.0	Electroconductive hose with NW50. Suitable for temperatures up to 65°C. Length: 3 m.	
Hose EVA NW50 5 m	76	9.988-091.0		
Hose installation sets		1		
Hose installation kit DN40	77	9.989-627.0	Multipiece hose connection set, DN 40.	
Hose installation kit DN50	78	9.989-628.0	Multipiece hose connection kit, DN 50.	
PU hoses		I		
Hose PU DN40 3 m	79	9.989-617.0	Oil-resistant, electroconductive PU hose, DN 40. Suitable for abrasive suction media and temperature-resistant up to 80 $^\circ$ C. Length: 3 m.	
Hose PU DN40 5 m	80	9.989-618.0	Oil-resistant, electroconductive PU hose, DN 40. Suitable for abrasive suction media and temperature-resistant up to 80 °C. Length: 5 m.	
PU hose DN40 15 m without connectors	81	9.989-637.0	PU hose without tap adapter, DN 40. Electroconductive and temperature-resistant up to 80 °C. Length: 15 m.	
Hose PU DN50 3 m	82	9.989-619.0	Oil-resistant, electroconductive PU hose, DN 50. Suitable for abrasive suction media and temperature-resistant up to 80 °C. Length: 3 m.	
Hose PU DN50 5 m	83	9.989-620.0	Oil-resistant, electroconductive PU hose, DN 50. Suitable for abrasive suction media and temperature-resistant up to 80 °C. Length: 5 m.	
PU hose DN50 15 m without connectors	84	9.989-638.0	PU hose without tap adapter, DN 50. Electroconductive and temperature-resistant up to 80 °C. Length: 15 m.	

□ Available accessories.

ACCESSORIES FOR IVR-L 100/24-2 TC ME 9.987-886.0












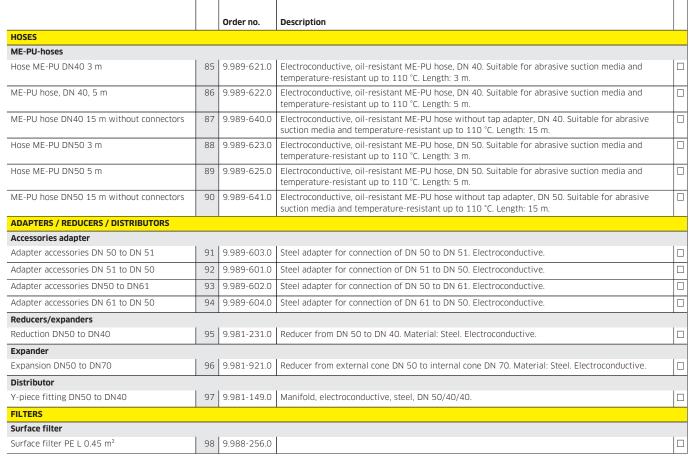

Available accessories.

ACCESSORIES FOR IVR-L 100/24-2 TC ME 9.987-886.0











		Order no.	Description			
EMPTYING SUPPORTS						
Strainer baskets						
Filter basket, stainless steel, Ø 495 mm, 40 l	99	9.980-849.0	Filter basket, stainless steel, 40 l, hole diameter 1.5 mm. For the efficient separation of liquids and shavings.			
Other emptying aids						
Overfill protection dia. 540 mm	100	9.982-117.0	Float insert, stainless steel, for overfill prevention with ball float, central suction.			
Fine fleece		•				
Fine fleece PE 40 I	101	9.981-048.0	Fine fleece filter made from polyester with 465 mm diameter. For separating fine metal shavings and liquids. With clamping ring, suitable for 40 litre filter basket.			
PRE-SEPARATORS						
Pre-separator						
Pre-separator Tc Op liquids 125 DN70	102	9.989-686.0	125 litre pre-separator, DN 70.			
Pre-separator drum 200 l	103	9.989-685.0	Standard drum which complies with the ISO 15750-2 standard.			
Pre-separator lid	Pre-separator lid					
Pre-separator cover Op liquids ø 517 mm DN70	104	9.981-666.0	Pre-separator cover DN 70. Suitable for containers with 517 mm diameter.			
Pre-separator cover Op liquids ø 575 mm DN70	105	9.981-662.0	Pre-separator cover DN 70 for 200 litre standard drum (9.989-685.0).			
Pre-separator cover solid materials ø 517 mm DN70	106	9.981-665.0	Pre-separator cover DN 70. Suitable for containers with 517 mm diameter.			
Pre-separator cover solid materials ø 575 mm DN70	107	9.981-661.0	Pre-separator cover DN 70 for 200 litre standard drum (9.989-685.0).			

□ Available accessories.