


# KÄRCHER

makes a difference

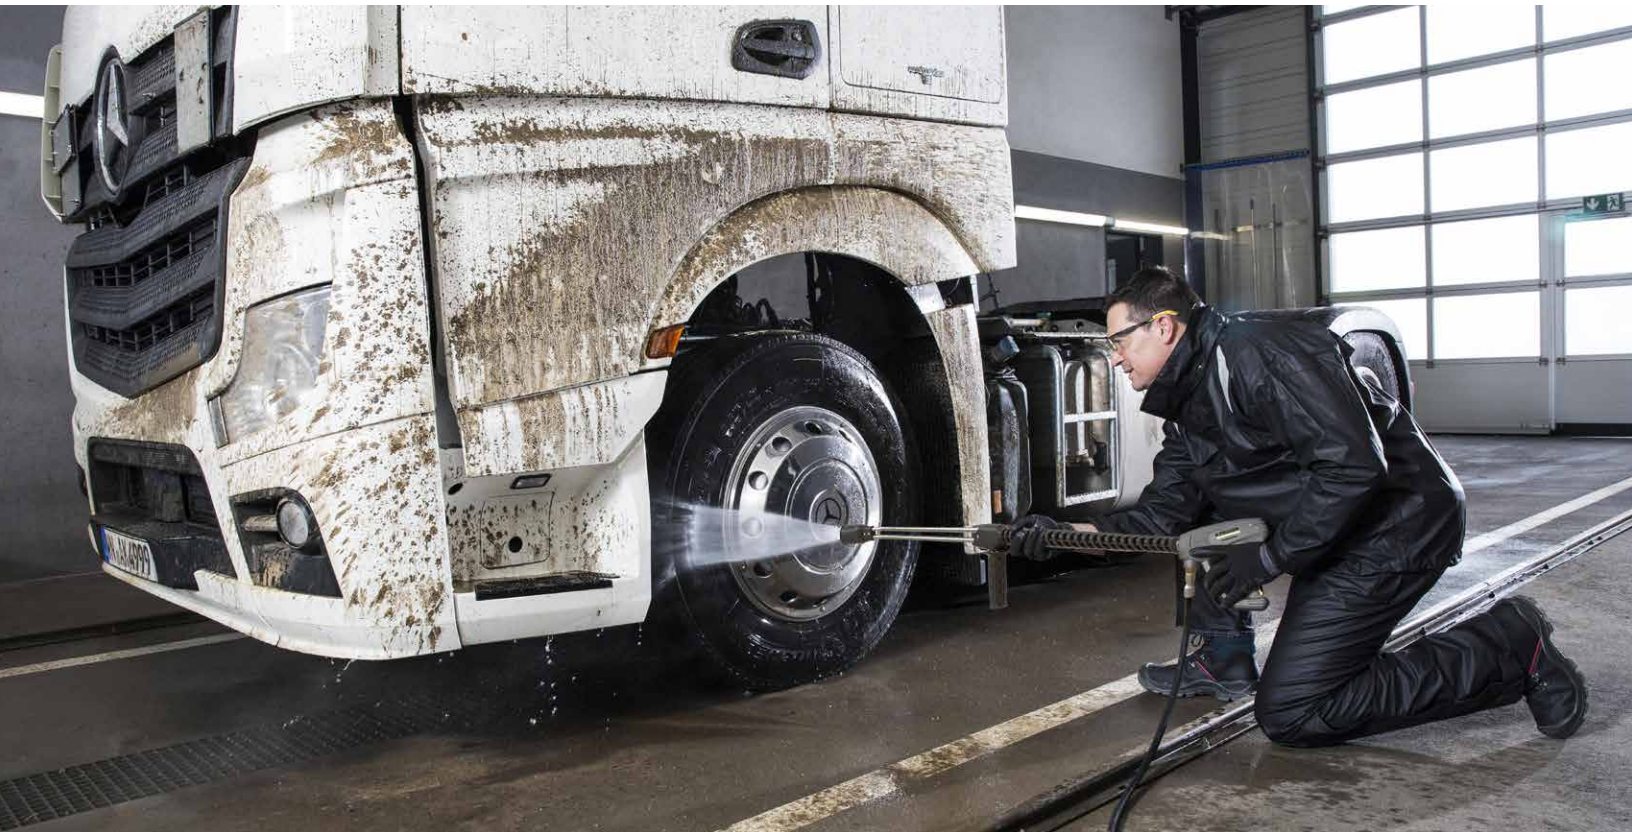

## RUGGED DESIGN FOR INDUSTRIAL CLEANING.

Hot water, natural gas or LP-heated pressure washer.

PROFESSIONAL | SECHURA SERIES

# SECHURA - NG



## High cleaning performance.

The Kärcher Sechura natural gas and LP-heated cabinet pressure washer delivers up to 9.5 gpm at 3000 psi of industrial power. Built in the U.S.A., each model is constructed with anodized structural rivets, industrial motors and Kärcher pumps that are backed by a 7-year warranty.



## SECHURA SERIES - NG

### TECHNICAL DATA

| Model   | Part No.    | GPM | PSI  | Drive | HP  | Electrical | Amps | Pump           | Ship Weight (lbs) | BTU    | Ship Dimensions (L x W x H) Inches |
|---|-------------|-----|------|-------|-----|------------|------|----------------|-------------------|--------|------------------------------------|
| <b>Natural Gas-Heated 3.5-5.0 GPM Medium Cabinet Design</b> |             |     |      |       |     |            |      |                |                   |        |                                    |
| HDS 3.5/20 Ea ST NG   | 1.109-715.0 | 3.5 | 2000 | Belt  | 5   | 230V / 1ph | 25   | KD4020R / 1350 | 815               | 320000 | 49 x 24 x 48                       |
| HDS 4.0/22 Ea ST NG   | 1.109-716.0 | 4   | 2200 | Belt  | 6.2 | 230V / 1ph | 29   | KM4035R / 1250 | 843               | 364000 | 49 x 24 x 48                       |
| HDS 4.0/22 Eb ST NG   | 1.109-717.0 | 4   | 2200 | Belt  | 6.2 | 230V / 3ph | 16   | KM4035R / 1250 | 843               | 364000 | 49 x 24 x 48                       |
| HDS 4.0/22 Ec ST NG   | 1.109-718.0 | 4   | 2200 | Belt  | 6.2 | 460V / 3ph | 7    | KM4035R / 1250 | 843               | 364000 | 49 x 24 x 48                       |
| HDS 4.0/22 Ef ST NG   | 1.109-719.0 | 4   | 2200 | Belt  | 6.2 | 575V / 3ph | 6.5  | KM4035R / 1250 | 843               | 364000 | 49 x 24 x 48                       |
| HDS 4.0/22 Eg ST NG   | 1.109-720.0 | 4   | 2200 | Belt  | 6.2 | 208V / 1ph | 30   | KM4035R / 1250 | 843               | 364000 | 49 x 24 x 48                       |
| HDS 4.0/22 Eh ST NG   | 1.109-721.0 | 4   | 2200 | Belt  | 6.2 | 208V / 3ph | 18   | KM4035R / 1250 | 843               | 364000 | 49 x 24 x 48                       |
| HDS 3.9/30 Ea ST NG   | 1.109-723.0 | 3.9 | 3000 | Belt  | 8.2 | 230V / 1ph | 36   | KM4035R / 1225 | 856               | 354000 | 49 x 24 x 48                       |
| HDS 3.9/30 Eb ST NG   | 1.109-724.0 | 3.9 | 3000 | Belt  | 8.2 | 230V / 3ph | 25   | KM4035R / 1225 | 856               | 354000 | 49 x 24 x 48                       |
| HDS 3.9/30 Ec ST NG   | 1.109-725.0 | 3.9 | 3000 | Belt  | 8.2 | 460V / 3ph | 11   | KM4035R / 1225 | 856               | 354000 | 49 x 24 x 48                       |
| HDS 3.9/30 Ef ST NG   | 1.109-726.0 | 3.9 | 3000 | Belt  | 8.2 | 575V / 3ph | 14   | KM4035R / 1225 | 856               | 354000 | 49 x 24 x 48                       |
| HDS 3.9/30 Eg ST NG   | 1.109-727.0 | 3.9 | 3000 | Belt  | 8.2 | 208V / 1ph | 38   | KM4035R / 1225 | 856               | 354000 | 49 x 24 x 48                       |
| HDS 3.9/30 Eh ST NG   | 1.109-728.0 | 3.9 | 3000 | Belt  | 8.2 | 208V / 3ph | 27   | KM4035R / 1225 | 856               | 354000 | 49 x 24 x 48                       |
| HDS 5.0/23 Ea ST NG   | 1.109-730.0 | 5.0 | 2300 | Belt  | 8.2 | 230V / 1ph | 36   | KT6035R / 1225 | 856               | 439000 | 49 x 24 x 48                       |
| HDS 5.0/23 Eb ST NG   | 1.109-731.0 | 5.0 | 2300 | Belt  | 8.2 | 230V / 3ph | 25   | KT6035R / 1225 | 856               | 439000 | 49 x 24 x 48                       |
| HDS 5.0/23 Ec ST NG   | 1.109-732.0 | 5.0 | 2300 | Belt  | 8.2 | 460V / 3ph | 11   | KT6035R / 1225 | 856               | 439000 | 49 x 24 x 48                       |
| HDS 5.0/23 Ef ST NG   | 1.109-733.0 | 5.0 | 2300 | Belt  | 8.2 | 575V / 3ph | 14   | KT6035R / 1225 | 856               | 439000 | 49 x 24 x 48                       |
| HDS 5.0/23 Eg ST NG   | 1.109-734.0 | 5.0 | 2300 | Belt  | 8.2 | 208V / 1ph | 38   | KT6035R / 1225 | 856               | 439000 | 49 x 24 x 48                       |
| HDS 5.0/23 Eh ST NG   | 1.109-735.0 | 5.0 | 2300 | Belt  | 8.2 | 208V / 3ph | 27   | KT6035R / 1225 | 856               | 439000 | 49 x 24 x 48                       |
| HDS 4.8/30 Ea ST NG   | 1.109-736.0 | 4.8 | 3000 | Belt  | 10  | 230V / 1ph | 42   | KT6035R / 1225 | 885               | 415000 | 49 x 24 x 48                       |
| HDS 4.8/30 Eb ST NG   | 1.109-737.0 | 4.8 | 3000 | Belt  | 10  | 230V / 3ph | 26   | KT6035R / 1225 | 885               | 415000 | 49 x 24 x 48                       |
| HDS 4.8/30 Ec ST NG   | 1.109-738.0 | 4.8 | 3000 | Belt  | 10  | 460V / 3ph | 15   | KT6035R / 1225 | 885               | 415000 | 49 x 24 x 48                       |
| HDS 4.8/30 Ef ST NG   | 1.109-739.0 | 4.8 | 3000 | Belt  | 10  | 575V / 3ph | 14   | KT6035R / 1225 | 885               | 415000 | 49 x 24 x 48                       |
| HDS 4.8/30 Eg ST NG   | 1.109-740.0 | 4.8 | 3000 | Belt  | 10  | 208V / 1ph | 49   | KT6035R / 1225 | 885               | 415000 | 49 x 24 x 48                       |
| HDS 4.8/30 Eh ST NG   | 1.109-741.0 | 4.8 | 3000 | Belt  | 10  | 208V / 3ph | 32   | KT6035R / 1225 | 885               | 415000 | 49 x 24 x 48                       |

### TECHNICAL DATA

| Model   | Part No.    | GPM | PSI  | Drive | HP | Electrical | Amps | Pump           | Ship Weight (lbs) | BTU    | Ship Dimensions (L x W x H) Inches |
|---|-------------|-----|------|-------|----|------------|------|----------------|-------------------|--------|------------------------------------|
| <b>Natural Gas-Heated 6.3+ GPM Large Cabinet Design</b> |             |     |      |       |    |            |      |                |                   |        |                                    |
| HDS 6.3/32 Eb ST NG                                     | 1.109-744.0 | 6.3 | 3200 | Belt  | 15 | 230V / 3ph | 39   | KT6035R / 1625 | 1825              | 507000 | 64 x 35 x 61                       |
| HDS 6.3/32 Ec ST NG                                     | 1.109-745.0 | 6.3 | 3200 | Belt  | 15 | 460V / 3ph | 19   | KT6035R / 1625 | 1825              | 507000 | 64 x 35 x 61                       |
| HDS 6.3/32 Ef ST NG                                     | 1.109-746.0 | 6.3 | 3200 | Belt  | 15 | 575V / 3ph | 18   | KT6035R / 1625 | 1825              | 507000 | 64 x 35 x 61                       |
| HDS 6.3/32 Eh ST NG                                     | 1.109-747.0 | 6.3 | 3200 | Belt  | 15 | 208V / 3ph | 39   | KT6035R / 1625 | 1825              | 507000 | 64 x 35 x 61                       |
| HDS 8.0/32 Eb ST NG                                     | 1.109-748.0 | 8.0 | 3200 | Belt  | 20 | 230V / 3ph | 46   | KX9536R / 1458 | 1840              | 658000 | 64 x 35 x 61                       |
| HDS 8.0/32 Ec ST NG                                     | 1.109-749.0 | 8.0 | 3200 | Belt  | 20 | 460V / 3ph | 26   | KX9536R / 1458 | 1840              | 658000 | 64 x 35 x 61                       |
| HDS 8.0/32 Ef ST NG                                     | 1.109-750.0 | 8.0 | 3200 | Belt  | 20 | 575V / 3ph | 21   | KX9536R / 1458 | 1840              | 658000 | 64 x 35 x 61                       |
| HDS 8.0/32 Eh ST NG                                     | 1.109-751.0 | 8.0 | 3200 | Belt  | 20 | 208V / 3ph | 60   | KX9536R / 1458 | 1840              | 658000 | 64 x 35 x 61                       |
| HDS 9.5/30 Eb ST NG                                     | 1.109-752.0 | 9.5 | 3000 | Belt  | 20 | 230V / 3ph | 52   | KX1036R / 1650 | 1910              | 816000 | 64 x 35 x 61                       |
| HDS 9.5/30 Ec ST NG                                     | 1.109-753.0 | 9.5 | 3000 | Belt  | 20 | 460V / 3ph | 26   | KX1036R / 1650 | 1910              | 816000 | 64 x 35 x 61                       |
| HDS 9.5/30 Ef ST NG                                     | 1.109-754.0 | 9.5 | 3000 | Belt  | 20 | 575V / 3ph | 21   | KX1036R / 1650 | 1910              | 816000 | 64 x 35 x 61                       |
| HDS 9.5/30 Eh ST NG                                     | 1.109-755.0 | 9.5 | 3000 | Belt  | 20 | 208V / 3ph | 30   | KX1036R / 1650 | 1910              | 816000 | 64 x 35 x 61                       |

# SECHURA SERIES - LP

## TECHNICAL DATA

| Model  | Part No.    | GPM | PSI  | Drive | HP  | Electrical | Amps | Pump            | Ship Weight (lbs) | BTU    | Ship Dimensions (L x W x H) Inches |
|--|-------------|-----|------|-------|-----|------------|------|-----------------|-------------------|--------|------------------------------------|
| <b>LP Gas-Heated 3.5-5.0 GPM Medium Cabinet Design</b> |             |     |      |       |     |            |      |                 |                   |        |                                    |
| HDS 3.5/20 Ea ST LP                                    | 1.109-756.0 | 3.5 | 2000 | Belt  | 5   | 230V / 1ph | 25   | KD4020R / 1350h | 815               | 320000 | 49 x 24 x 48                       |
| HDS 4.0/22 Ea ST LP                                    | 1.109-757.0 | 4   | 2200 | Belt  | 6.2 | 230V / 1ph | 29   | KM4035R / 1250  | 843               | 364000 | 49 x 24 x 48                       |
| HDS 4.0/22 Eb ST LP                                    | 1.109-758.0 | 4   | 2200 | Belt  | 6.2 | 230V / 3ph | 16   | KM4035R / 1250  | 843               | 364000 | 49 x 24 x 48                       |
| HDS 4.0/22 Ec ST LP                                    | 1.109-759.0 | 4   | 2200 | Belt  | 6.2 | 460V / 3ph | 7    | KM4035R / 1250  | 843               | 364000 | 49 x 24 x 48                       |
| HDS 4.0/22 Ef ST LP                                    | 1.109-760.0 | 4   | 2200 | Belt  | 6.2 | 575V / 3ph | 6.5  | KM4035R / 1250  | 843               | 364000 | 49 x 24 x 48                       |
| HDS 4.0/22 Eg ST LP                                    | 1.109-761.0 | 4   | 2200 | Belt  | 6.2 | 208V / 1ph | 30   | KM4035R / 1250  | 843               | 364000 | 49 x 24 x 48                       |
| HDS 4.0/22 Eh ST LP                                    | 1.109-762.0 | 4   | 2200 | Belt  | 6.2 | 208V / 3ph | 18   | KM4035R / 1250  | 843               | 364000 | 49 x 24 x 48                       |
| HDS 3.9/30 Ea ST LP                                    | 1.109-764.0 | 3.9 | 3000 | Belt  | 8.2 | 230V / 1ph | 36   | KM4035R / 1225  | 856               | 354000 | 49 x 24 x 48                       |
| HDS 3.9/30 Eb ST LP                                    | 1.109-765.0 | 3.9 | 3000 | Belt  | 8.2 | 230V / 3ph | 25   | KM4035R / 1225  | 856               | 354000 | 49 x 24 x 48                       |
| HDS 3.9/30 Ec ST LP                                    | 1.109-766.0 | 3.9 | 3000 | Belt  | 8.2 | 460V / 3ph | 11   | KM4035R / 1225  | 856               | 354000 | 49 x 24 x 48                       |
| HDS 3.9/30 Ef ST LP                                    | 1.109-767.0 | 3.9 | 3000 | Belt  | 8.2 | 575V / 3ph | 14   | KM4035R / 1225  | 856               | 354000 | 49 x 24 x 48                       |
| HDS 3.9/30 Eg ST LP                                    | 1.109-768.0 | 3.9 | 3000 | Belt  | 8.2 | 208V / 1ph | 38   | KM4035R / 1225  | 856               | 354000 | 49 x 24 x 48                       |
| HDS 3.9/30 Eh ST LP                                    | 1.109-769.0 | 3.9 | 3000 | Belt  | 8.2 | 208V / 3ph | 27   | KM4035R / 1225  | 856               | 354000 | 49 x 24 x 48                       |
| HDS 5.0/23 Ea ST LP                                    | 1.109-771.0 | 5.0 | 2300 | Belt  | 8.2 | 230V / 1ph | 36   | KT6035R / 1225  | 856               | 439000 | 49 x 24 x 48                       |
| HDS 5.0/23 Eb ST LP                                    | 1.109-772.0 | 5.0 | 2300 | Belt  | 8.2 | 230V / 3ph | 25   | KT6035R / 1225  | 856               | 439000 | 49 x 24 x 48                       |
| HDS 5.0/23 Ec ST LP                                    | 1.109-773.0 | 5.0 | 2300 | Belt  | 8.2 | 460V / 3ph | 11   | KT6035R / 1225  | 856               | 439000 | 49 x 24 x 48                       |
| HDS 5.0/23 Ef ST LP                                    | 1.109-774.0 | 5.0 | 2300 | Belt  | 8.2 | 575V / 3ph | 14   | KT6035R / 1225  | 856               | 439000 | 49 x 24 x 48                       |
| HDS 5.0/23 Eg ST LP                                    | 1.109-775.0 | 5.0 | 2300 | Belt  | 8.2 | 208V / 1ph | 38   | KT6035R / 1225  | 856               | 439000 | 49 x 24 x 48                       |
| HDS 5.0/23 Eh ST LP                                    | 1.109-776.0 | 5.0 | 2300 | Belt  | 8.2 | 208V / 3ph | 27   | KT6035R / 1225  | 856               | 439000 | 49 x 24 x 48                       |
| HDS 4.8/30 Ea ST LP                                    | 1.109-777.0 | 4.8 | 3000 | Belt  | 10  | 230V / 1ph | 42   | KT6035R / 1225  | 885               | 415000 | 49 x 24 x 48                       |
| HDS 4.8/30 Eb ST LP                                    | 1.109-778.0 | 4.8 | 3000 | Belt  | 10  | 230V / 3ph | 26   | KT6035R / 1225  | 885               | 415000 | 49 x 24 x 48                       |
| HDS 4.8/30 Ec ST LP                                    | 1.109-779.0 | 4.8 | 3000 | Belt  | 10  | 460V / 3ph | 15   | KT6035R / 1225  | 885               | 415000 | 49 x 24 x 48                       |
| HDS 4.8/30 Ef ST LP                                    | 1.109-780.0 | 4.8 | 3000 | Belt  | 10  | 575V / 3ph | 14   | KT6035R / 1225  | 885               | 415000 | 49 x 24 x 48                       |
| HDS 4.8/30 Eg ST LP                                    | 1.109-781.0 | 4.8 | 3000 | Belt  | 10  | 208V / 1ph | 49   | KT6035R / 1225  | 885               | 415000 | 49 x 24 x 48                       |
| HDS 4.8/30 Eh ST LP                                    | 1.109-782.0 | 4.8 | 3000 | Belt  | 10  | 208V / 3ph | 32   | KT6035R / 1225  | 885               | 415000 | 49 x 24 x 48                       |

## TECHNICAL DATA

| Model   | Part No.    | GPM | PSI  | Drive | HP | Electrical | Amps | Pump           | Ship Weight (lbs) | BTU    | Ship Dimensions (L x W x H) Inches |
|---|-------------|-----|------|-------|----|------------|------|----------------|-------------------|--------|------------------------------------|
| <b>Natural Gas-Heated 6.3+ GPM Large Cabinet Design</b> |             |     |      |       |    |            |      |                |                   |        |                                    |
| HDS 6.3/32 Eb ST LP                                     | 1.109-785.0 | 6.3 | 3200 | Belt  | 15 | 230V / 3ph | 39   | KT6035R / 1625 | 1825              | 507000 | 64 x 35 x 61                       |
| HDS 6.3/32 Ec ST LP                                     | 1.109-786.0 | 6.3 | 3200 | Belt  | 15 | 460V / 3ph | 19   | KT6035R / 1625 | 1825              | 507000 | 64 x 35 x 61                       |
| HDS 6.3/32 Ef ST LP                                     | 1.109-787.0 | 6.3 | 3200 | Belt  | 15 | 575V / 3ph | 18   | KT6035R / 1625 | 1825              | 507000 | 64 x 35 x 61                       |
| HDS 6.3/32 Eh ST LP                                     | 1.109-788.0 | 6.3 | 3200 | Belt  | 15 | 208V / 3ph | 39   | KT6035R / 1625 | 1825              | 507000 | 64 x 35 x 61                       |
| HDS 8.0/32 Eb ST LP                                     | 1.109-789.0 | 8.0 | 3200 | Belt  | 20 | 230V / 3ph | 46   | KX9536R / 1458 | 1840              | 658000 | 64 x 35 x 61                       |
| HDS 8.0/32 Ec ST LP                                     | 1.109-790.0 | 8.0 | 3200 | Belt  | 20 | 460V / 3ph | 26   | KX9536R / 1458 | 1840              | 658000 | 64 x 35 x 61                       |
| HDS 8.0/32 Ef ST LP                                     | 1.109-791.0 | 8.0 | 3200 | Belt  | 20 | 575V / 3ph | 21   | KX9536R / 1458 | 1840              | 658000 | 64 x 35 x 61                       |
| HDS 8.0/32 Eh ST LP                                     | 1.109-792.0 | 8.0 | 3200 | Belt  | 20 | 208V / 3ph | 60   | KX9536R / 1458 | 1840              | 658000 | 64 x 35 x 61                       |
| HDS 9.5/30 Eb ST LP                                     | 1.109-793.0 | 9.5 | 3000 | Belt  | 20 | 230V / 3ph | 52   | KX1036R / 1650 | 1910              | 775000 | 64 x 35 x 61                       |
| HDS 9.5/30 Ec ST LP                                     | 1.109-794.0 | 9.5 | 3000 | Belt  | 20 | 460V / 3ph | 26   | KX1036R / 1650 | 1910              | 775000 | 64 x 35 x 61                       |
| HDS 9.5/30 Ef ST LP                                     | 1.109-795.0 | 9.5 | 3000 | Belt  | 20 | 575V / 3ph | 21   | KX1036R / 1650 | 1910              | 775000 | 64 x 35 x 61                       |
| HDS 9.5/30 Eh ST LP                                     | 1.109-796.0 | 9.5 | 3000 | Belt  | 20 | 208V / 3ph | 60   | KX1036R / 1650 | 1910              | 775000 | 64 x 35 x 61                       |

## ACCESSORIES

| Order No.                                       | Description   |
|---|---|
| <input checked="" type="checkbox"/> 8.756-481.0 | EASY!Force trigger gun (North American Model) - zero force required. Standard 1/4" connection for wand, 3/8" connection for hose. |
| <input type="checkbox"/> 8.917-509.0            | Kit, wireless remote pump/burner/detergent  |
| <input type="checkbox"/> 8.921-832.0            | Wireless hand-held transmitter  |
| <input type="checkbox"/> 8.917-817.0            | Kit, wall bracket wireless transmitter  |
| <input type="checkbox"/> 8.921-774.0            | NG kit, wired remote station - pump and burner  |
| <input type="checkbox"/> 8.921-773.0            | NG kit, wired remote detergent  |
| <input type="checkbox"/> 8.922-157.0            | Remote control box (wired) (Pump / burner switch Included, add 8.921-773.0 for detergent switch). For additional remote only.     |
| <input type="checkbox"/> 8.917-507.0            | Snap-N-Go Auto Start/Stop Kit w/ Lock Out (no remote, or wireless remote)   |
| <input type="checkbox"/> 9.807-646.0            | Snap-N-Go Auto Start/Stop Kit w/o Lock Out (wired remote, requires 8.921-774.0)   |
| <input type="checkbox"/> 8.917-508.0            | Snap-N-Go Time Delay Kit  |
| <input type="checkbox"/> 8.921-776.0            | Kit, steam combo  |
| <input type="checkbox"/> 9.801-040.0            | Draft diverter, 10", up to 5 gpm  |
| <input type="checkbox"/> 8.717-730.0            | Draft diverter, 12", over 5 gpm   |
| <input type="checkbox"/> 8.753-474.0            | Draft damper, 10"   |
| <input type="checkbox"/> 8.753-478.0            | Draft damper, 12"   |
| <input type="checkbox"/> 8.753-706.0            | Reducer, stack 12" to 10"   |
| <input type="checkbox"/> 8.753-707.0            | Reducer, stack 10" to 8"  |
| <input type="checkbox"/> 8.923-213.0            | Outlet relocater  |

Please contact us for more information:

**North America**

4555 Airport Way  
Denver, CO 80239  
U.S.A.

Phone 888-805-9852  
Fax 800-248-8409

[www.karcher.com/us](http://www.karcher.com/us)

**Kärcher Canada**

275 Pendant Drive  
Mississauga, ON L5T 2W9  
Canada

Tel. 905-672-8233  
Fax 905-672-3155

[www.karcher.ca](http://www.karcher.ca)