


High-pressure pump 330Z

The type 330Z high-pressure pump provides a max. operating pressure of 1,500 bar and a max. flow rate of 319 l/min.

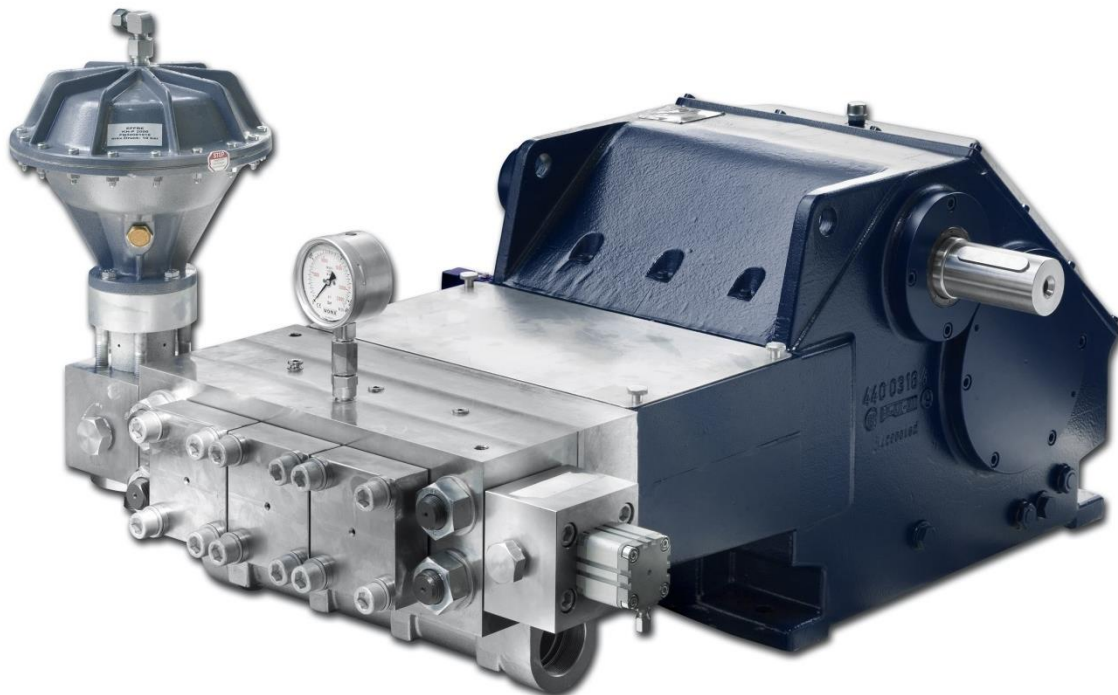

With operating pressures of up to 1,500 bar and nominal flow rates of up to 744 l/min, the Z-series is the ideal pump for industrial cleaning as well as for paint removal and descaling.

Proper guidance of the plunger ensures a long service life of the sealing system. The used sealing water system prevents leakage, allows for a particularly high durability of the high-pressure seals and counteracts the intrusion of air. The central valve design of the pump results in a high volumetric efficiency. Pumps with an operating pressure of 1,000 bar or more are equipped with carbide plungers, which ensure a long service life and thus low maintenance costs.

On request, the availability of an ATEX version can be checked.

Technical data		
Weight	approx.	980 kg
Inlet pressure connection		IG 2 ½"
Pressure connection with flange		M24x1.5 M36x2 M42x2
Cooling water connection		G ½"
Crankshaft	max. min.	426 1/min Depends on operation parameters
Drive shaft		Diameter 70mm k6, feather key DIN 6885 Sheet 1, A20 x 12 x 100
Torque at drive shaft	max.	1,261 Nm
Moment of inertia J		0.114 kgm ²
Centrifugal moment GD ²		4.45 Nm ²
Inlet pressure	min. max.	1.5 bar 5.0 bar
Pressure amplitude	max.	± 2.0 bar
Flow temperature	min. max.	+5 °C +45 °C (higher temperatures on request)
Flow inlet requirement	min.	1.5x nominal feed rate of the pump, dependent on the conversion set
Emission sound pressure level according to DIN EN ISO 11200		>80 dB(A)
Oil capacity of transmission end	approx.	30 l
Oil viscosity ISO VG under DIN 51517-2 or -3		320 mm ² /s
Oil pressure lubrication		2.5 - 5.0 bar
Oil pressure set value overflow valve		5.0 bar
Oil filter fineness		0.025 mm
Oil temperature	max. Set value	80 °C 60 - 70 °C
Heat exchanger cooling water requirement	appr.	10 - 20 l/min
Heat exchanger cooling water temperature	min. max.	+5 °C +45 °C
Heat exchanger cooling water pressure	min. max.	1.5 bar 10 bar

Performance variants**														
Pinion shaft		Crank shaft	P26		P28		P30		P35		P45		P50	
1,500 [1/min]	1,800 [1/min]		1,500 bar*		1,300 bar		1,150 bar		850 bar		500 bar		400 bar	
Gear ratio		[1/min]	[kW]	[l/min]	[kW]	[l/min]	[kW]	[l/min]	[kW]	[l/min]	[kW]	[l/min]	[kW]	[l/min]
	4.23	426*	222	81	225	95	231	110	236*	152	234	257	232	319*
4.23		355	185	67	188	79	192	92	197	127	195	214	193	266

* Maximum values of the pump

** Technical changes reserved

Overview pump 330Z

