

OSCILLATING SPRINKLER OS 3.220

Oscillating sprinkler OS 3.220 for watering medium-sized and large areas and gardens. Infinite coverage adjustment. Extremely durable gear drive. Maximum coverage: 220 m2












Order no.	2.645-133.0

Technical data		
EAN code		4039784426337
Sprinkling area (2 bar)		45 – 120 m²
Sprinkling area (4 bar)		80 – 220 m²
Width of spray (2 bar)	m	9
Width of spray (4 bar)	m	13
Area coverage (2 bar)	m	5 – 14
Area coverage (4 bar)	m	6 – 17
Colour		Black
Weight	kg	0.4
Weight incl. packaging	kg	0.5
Dimensions (L × W × H)	mm	450 × 136 × 86

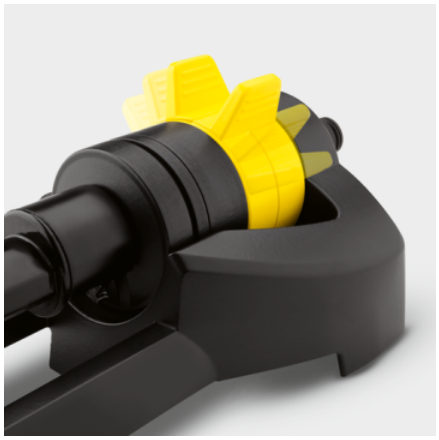

Continuous reach adjustment

- Precise watering.



Loop for hanging the device integrated into the handle

- For simple storage/hanging.



Includes cleaning needle

- For easy cleaning of the nozzles

COMPATIBLE MACHINES

- Watering Unit WT 4

ACCESSORIES FOR OSCILLATING SPRINKLER OS 3.220
2.645-133.0


1


2


3


4


5

		Order no.	Description	
HOSES				
Hose set for pressure washers	1	2.645-399.0	Hose set for pressure washers with 10 m PrimoFlex® hose (1/2"), G3/4 tap adapter, 1 × hose connector and 1 × hose connector with Aqua Stop.	☐
PrimoFlex® hose 1/2" – 20 m	2	2.645-138.0	The flexible PrimoFlex® garden hose (1/2", 20 m) with pressure-resistant reinforcement is suitable for watering fruit, vegetables, and ornamental plants. Burst pressure: 24 bar.	☐
HOSE CONNECTION SYSTEMS				
Universal Hose Connector with Aqua Stop	3	2.645-192.0	Universal hose coupling with Aqua Stop. Ergonomic design for convenient handling.	☐
G3/4 tap adaptor with G1/2 reducer	4	2.645-006.0	Extremely tough tap connector 3/4" thread with 1/2" thread reducer. The reducer allows connection to two thread sizes. Compatible with all click systems.	☐
Universal Hose Connector	5	2.645-191.0	Ergonomically designed universal hose coupling for convenient handling.	☐

☐ Available accessories.