

ErgoControl

ErgoControl HP/ES

The ergonomic wired remote controls from the ErgoControl series are suitable for operating various types of WOMA high-pressure systems. Thanks to flexible positioning with the use of rugged control lines, the unit can also be safely operated or stopped in an emergency at a distance. In the ErgoControl ES variant, available designs permit an external Emergency Stop including an option for using the control line as a pass-through cable for the additional connection of a water tool. The HP variant enables the Emergency Stop function as well as the safe activation and deactivation of high-pressure operation.




Special features

- Ergonomic handling and remote control of all WOMA high-pressure systems using a standard remote control connection
- Safety relay for Emergency Stop and for the safe activation and deactivation of high-pressure operation
- Compatible with existing WOMA unit controls
- Rugged, impact-resistant housing made from powder-coated, die-cast aluminium

Variants				
Type	ErgoControl HP 24V	ErgoControl HP i	ErgoControl ES 24V	ErgoControl ES i
Material number	9.743-107.0	9.743-108.0	9.743-109.0	9.743-110.0
Housing colour/markings	Black/yellow	Black/blue	Black/yellow	Black/blue
Length	140 mm		100 mm	
Width	40 mm			
Height	32.1 mm			
Weight	0.3 kg		0.4 kg	
IP rating	IP65			
Operating temperature	-25 °C to +70 °C			

Overview

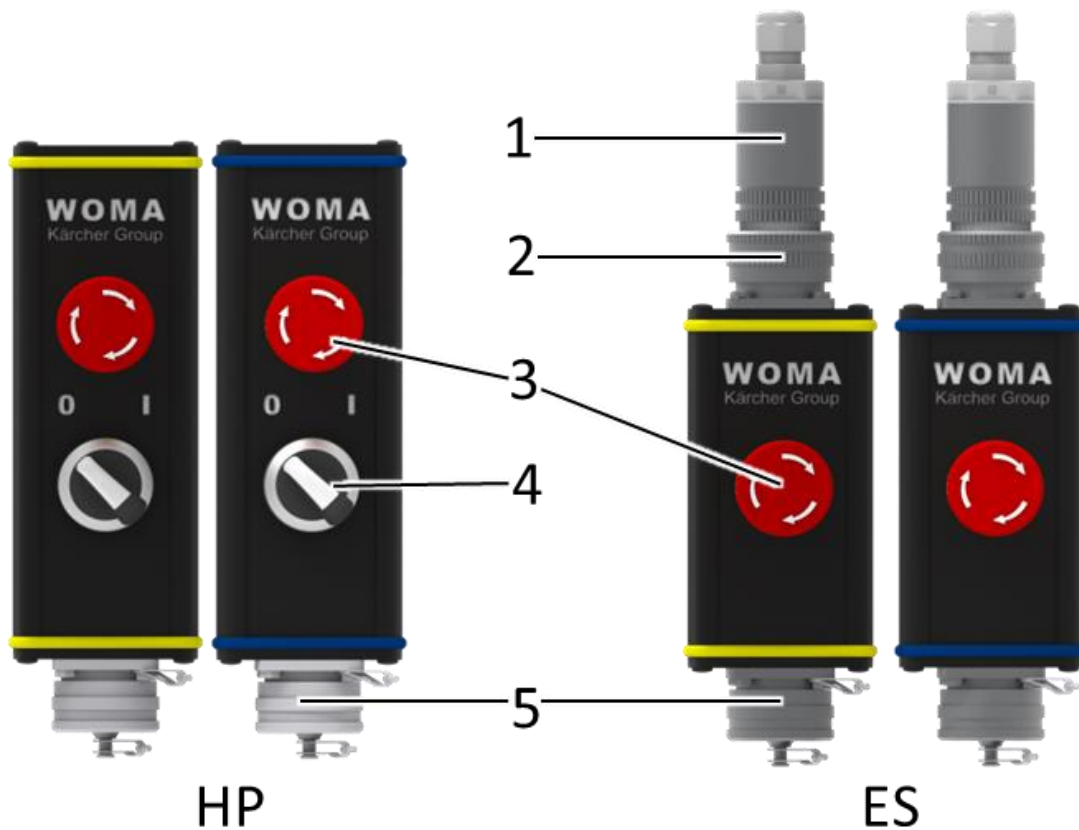

Legend	
1	Dummy plug
2	Water tool connection
3	Emergency Stop safety switch
4	Toggle switch high pressure on/off
5	High-pressure unit connection

Accessories		
Designation	24V model	i model
Extension cable 10 m	9.889-789.0	9.889-788.0
Extension cable 20 m	9.889-790.0	9.889-821.0
Extension cable 30 m	9.889-791.0	9.889-823.0
Cable drum 30 m	9.890-412.0	9.890-413.0
Cable drum 50 m	9.890-410.0	9.890-411.0