NT 65/2 TACT²

High capacity, high filtration professional multi-purpose vacuum cleaner with twin motors and Tact² automatic filter clean system for heavy duty dust extraction.





Order no.


1.667-286.0

- Automatic Filter Cleaning System Tact²
- Antistatic system
- Adjustable push handle

Technical data		
EAN code		4039784714953
Current type	Ph / V / Hz	1 / 220 - 240 / 50 - 60
Air flow	I/s	2 × 74
Vacuum	mbar / kPa	254 / 25.4
Container content	1	65
Container material		Plastic
Rated input power	W	max. 2760
Standard nominal size		ID 40
Cable length	m	10
Sound pressure level	dB(A)	73
Weight without accessories	kg	24.5
Weight incl. packaging	kg	31.3
Dimensions (L × W × H)	mm	575 × 490 × 880

Equipment		
Suction hose	m	4 / electrically conductive
Suction Tube	Piece(s) × mm	2 × 550 / Stainless steel
Wet and dry floor tool	mm	360
Crevice nozzle		
Drain hose (oil-resistant)		
Auto shutdown when max. level is reached		•
Antistatic system		
Flat pleated filter		Paper
Filter cleaning		Automatic Filter Cleaning System Tact ²
Sturdy bumper		
Push handle		
Safety class		Ī
Caster with brake		

Included in delivery

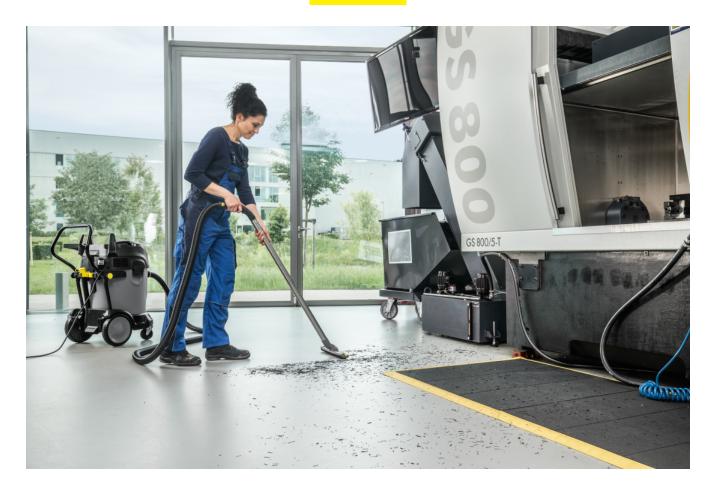



Easy transport

 Adjustable push handle and large wheels make transport easy even on uneven surfaces.



Smart accessory storage

• For example, the floor tool can be quickly fixed any way round.

Automatic Filter Cleaning System Tact²

- This divided flat pleated filter is cleaned by air blasts and can be removed from the clean side.
- Fine dusts cannot block the filter. A constant high air flow is maintained.
- Over 1000 kg of category A fine dust can be vacuumed without the need to change the filter.





















				_
		Order no.	Description	
FLAT PLEATED FILTER, STANDARD, BIA C OR	UP TO D	UST CLASS M		
Flat pleated filter (paper)				
Flat pleated filter (paper)	1	6.907-276.0	Flat pleated filter dust class M, nano-coated paper. Suitable for fine dust and dry dirt pick up.	
Flat pleated filter (PES)		•		
Flat pleated filter (PES)	2	6.907-277.0	Flat pleated filter dust class M, rotproof PES fleece. Suitable for frequent wet pick up.	
Flachfaltenfilter (PTFE)		<u> </u>		
Flat pleated filter, PTFE	3	6.907-449.0	Polyester fleece with PTFE coating, dust class M, for Tact² vacuum cleaners. Particularly suitable fo very adhesive materials.	r
BENDS				
Plastic bend				
Elbow electrically conducting packaged N	4	2.889-172.0	Bend for the new clip system in nominal size DN 40. Electrically conductive design. Particularly suited to high concentrations of fine dust.	-
Plastic bend	5	5.031-718.0	Plastic bend (DN 35) with C-35 clip system. For all industrial single-motor NT 361 to NT 611 Eco models (except NT Eco M and NT Eco H).	
	6	5.031-939.0	Electrically conductive plastic bend (DN 35) with C-35 clip system. For all industrial single-motor NT 361 to NT 611 Eco models.	
	7	5.032-427.0	Electrically conductive plastic bend (DN 40) with C-40 clip system, suitable for all NT vacuum cleaners.	
Bend metal		•		
Bend, DN 35, metal	8	6.900-519.0	Robust, chromium-plated metal bend (DN 35), can be used instead of a plastic bend (with clip system adapter 5.407-112.0, C 35-DN 35, plastic, el.).	
Bend, stainless steel ID 35	9	6.903-141.0	Stainless steel and crooked, ID 35	
Bend, DN 40, metal	10	6.900-276.0	Robust, chromium-plated metal bend (DN 40), can be used instead of a plastic bend (with clip system adapter 5.407-111.0, C 40-DN 40, plastic, el.).	
Bend, stainless steel ID 40	11	6.902-079.0	Stainless steel and crooked, ID 40	
SUCTION NOZZLES		<u> </u>		
All-purpose nozzles (wet/dry)				
Floor tool packaged NW40 360mm	12	2.889-153.0		I
Floor tool anthracite packaged NW35	13	2.889-173.0	300 millimetre width, anthracite coloured wet/dry floor nozzle, NW 35. With easy-to-change inserts. Incl. brush strips and squeegees.	
Floor tool anthracite packaged NW40	14	2.889-174.0	Standard floor nozzle, anthracite, in nominal diameter 40, with brush strips and squeegees. Suitable for all wet and dry applications.	e [
		1	I	

 $[\]blacksquare$ Included in delivery. \qed Available accessories.























		Order no.	Description			
SUCTION NOZZLES						
All-purpose nozzles (wet/dry)						
Floor tool DN40-370	15	6.903-018.0	All-purpose aluminium nozzle with 370 mm working width. With height-adjustable side rollers, brush strips (6.903-064.0) and oil-resistant squeegees (6.903-081.0). Only for NT vacuum cleaners.			
Floor tool neutrally DN40	16	6.906-383.0	All-purpose aluminium nozzle (DN 40) with 450 mm working width. With height-adjustable side rollers, brush strips (6.903-065.0) and oil-resistant squeegees (6.906-146.0). Only for NT vacuum cleaners.			
Floor tool neutrally DN35	17	6.906-384.0	All-purpose aluminium nozzle (DN 35) with 370 mm working width. With height-adjustable side rollers, brush strips (6.903-064.0) and oil-resistant squeegees (6.903-081.0). Only for NT vacuum cleaners.			
Wet and dry floor nozzle	18	2.889-117.0	The wet and dry floor nozzle (DN 40) allows quick changing of the squeegees/brush and is ideal for wet vacuum cleaning of large areas.			
Crevice nozzles						
Crevice nozzle DN 40 300mm 1:50	19	5.130-655.0				
Crevice nozzle packaged NW35	20	2.889-130.0	Plastic crevice nozzle.			
Crevice nozzle	21	6.900-922.0	Plastic crevice tool (DN 35) for vacuuming in crevices and corners. Length: 370 mm.			
Crevice nozzle DN40	22	6.905-817.0	Metal crevice tool (DN 40) for vacuuming in crevices and corners. Length: 400 mm.			
All-purpose brushes						
All-purpose brush	23	6.903-863.0	Natural bristles (ox hair), bristle element 120 × 45 mm.			
Car cleaning nozzles						
Car nozzle, DN 40, 90 mm	24	6.900-952.0	Angled, flat, plastic car vacuuming tool with about 90 mm working width. Only for NT vacuum cleaners.			
	25	2.840-095.0				
Rubber suction tools, nose 45°						
Rubber suction tools, nose 45°	26	6.902-104.0	45° rubber suction nozzle (DN 35), oil-resistant and suitable for vacuuming machines. Only for NT vacuum cleaners.			
	27	6.902-105.0	45° rubber suction nozzle (DN 40), oil-resistant and suitable for vacuuming machines. Only for NT vacuum cleaners.			
Pipe dusting nozzles						
BRUSH	28	6.903-035.0	Plastic, pipe diameter 100 mm			

 $[\]blacksquare$ Included in delivery. \qed Available accessories.

EQUIPMENT FOR NT 65/2 TACT² 1.667-286.0

























				_
		Order no.	Description	
SUCTION NOZZLES				
Pipe dusting nozzles				
BRUSH	29	6.903-036.0	Plastic, pipe diameter 200 mm	
SUCTION TUBES				
Suction tubes stainless steel				
Set suction tube stainless steel NW40 55	30	2.889-194.0	Stainless steel suction tube set (2 × 0.55 m)	
Suction tube, DN 35	31	6.902-154.0	0.5 m long stainless steel suction tube (ID 35) for wet and dry vacuum cleaners. Ideal for frequent wet vacuuming applications and for vacuuming corrosive components.	
Suction tube, ID 40	32	6.902-081.0	Stainless steel suction tube (DN 40, 0.5 m) only suitable for NT vacuum cleaners.	
Suction tube	33	6.906-531.0	Stainless steel suction tube (DN 40, 1.0 m) only suitable for NT vacuum cleaners.	
Suction tubes metal	1			Ť
Set suction tube chromed NW35 550mm	34	2.889-191.0	Suction tube set, metal-chrome-plated, NW 35, 2-part, each 0.55 millimetres.	
Suction tube DN35	35	6.900-514.0	Chromium-plated metal suction tube (DN 35, 1x0.5 m), standard for virtually all single-motor industrial NT vacuum cleaners.	
SUCTION HOSES				
Suction hoses with clip system 1.0 (compatible	with	vacuum cleane	rs up to model year 2016)	
Suction hose	36	6.906-321.0	4 m suction hose with bayonet and C 40 clip connection. Without bend and adapter.	
Repair set, C 40	37	2.639-873.0	Repair set (C40) includes threaded hose adapters (without bayonet adapter) for industrial NT vacuum cleaners with clip system.	
Extension hose, C 40	38	6.906-344.0	2.5 m electrically non-conductive standard extension hose for all C-40 hoses with clip system.	
Suction hose	39	4.440-678.0	4 m electrically non-conductive suction hose with bend, bayonet at vacuum end and C 40 clip connection at accessory end. Without module.	
Suction hose (clip system), C 40, 10 m	40	6.906-279.0	$10\mathrm{m}$ standard suction hose without bend and adapter. With bayonet at vacuum end and C 40 clip connection at accessory end.	
Suction hose	41	6.906-714.0	With bayonet and clip connection.	
Suction hose complete (Clip-system), C ID 40, 4 m, el.	42	4.440-728.0	With bend and module (4.060-533.0), electrically conductive.	

 \blacksquare Included in delivery. \qed Available accessories.





























				Т
		Order no.	Description	
SUCTION HOSES				
Suction hoses with clip system 1.0 (compatible	with	vacuum cleane	rs up to model year 2016)	
Suction hose (Clip-system), C 40, 16 m	43	6.906-635.0	With bayonet and clip connection.	
Suction hose (clip system), C 40, 10 m, el.	44	6.906-877.0	Suction hose with bayonet coupling, electrically conductive.	
Suction hoses with clip system 2.0 (compatible	with	vacuum cleane	rs from model year 2017 on)	
Electrically conductive suction hose	45	2.889-141.0	4 m, electrically conductive suction hose with new bayonet and clip fastener.	
	46	2.889-137.0	4 m suction hose with new bayonet and clip fastener. Electrically conductive.	
Suction hose	47	2.889-138.0	4 m suction hose with new bayonet and clip fastener.	
	48	2.889-139.0	Suction hose with new bayonet and clip fastener. Length: 2.5 m.	
Suction hose, oil-resistant	49	2.889-140.0	Oil-resistant suction hose with new bayonet and clip fastener. Length: 4 m.	
Electrically conductive suction hose	50	2.889-142.0	Suction hose, electrically conductive, with new bayonet and clip fastener. 2.5 m long.	
Extension hose packaged NW40 2.5m	51	2.889-146.0	Extension hose for new clip system ID 40. Length: 2.5 m.	
Repair set NW40	52	2.889-150.0	Repair kit ID 40 for the new clip system.	
Hose connection				_
Adapter, DN 32/35, with internal thread	53	6.902-077.0	Electrically non-conductive adapter with internal thread. For connecting two suction hoses without connectors. Suitable for DN 32 or DN 35.	
Adapter, DN 40 with internal thread	54	6.900-286.0	Electrically non-conductive adapter with screw thread at both ends. For connecting 2 DN 40 suction hoses without connectors.	
Suction hoses with cone connection	•	•		
Suction hose, complete	55	4.440-263.0	Electrically non-conductive 4.0m standard suction hose with bayonett at vacuum end and DN 40 cone at accessory end.	
Suction hose complete, ID 40, 4 m, oil-resistant,	56	4.440-303.0	Oil-resistant.	

 $[\]blacksquare$ Included in delivery. \qed Available accessories.

KÄRCHER



























				\top
		Order no.	Description	
SUCTION HOSES				
Suction hoses with cone connection	1			1
Suction hose, complete	57	4.440-463.0	Electrically non-conductive 10.0m standard suction hose with bayonett at vacuum end and DN 40 cone at accessory end.	
Suction hose complete	58	4.440-466.0	Electrically conductive, 10.0m, ID 40	
Suction hose complete, ID 40, 10 m, oil-resistant	59	4.440-612.0	Oil-resistant.	
Suction hose, complete	60	4.440-264.0	4 m standard suction hose with DN 61 bayonet at vacuum end and DN 61 cone at accessory end.	Ε
Suction hose complete, ID 61, smooth inside	61	4.440-328.0	Industrial hose, PVC/elastomer with steel spiral, smooth inside.	
Suction hose, complete, DN 61, 10 m	62	4.440-467.0	10 m standard suction hose with DN 61 bayonet at vacuum end and DN 61 cone at accessory end.	[
Suction hose complete, ID 61, 4 m, oil-resistant	63	4.440-613.0	Oil-resistant.	
Suction hose complete, ID 61, 4 m, el.	64	4.440-616.0	Electrically conductive.	[
FILTER BAGS		<u> </u>		_
Fleece filter bags (3 ply)				
Fleece filter bags, 5 × , NT 65, NT 70, NT 72, NT 75	65	2.885-753.0		
Paper filter bags				Ť
Paper filter bags, 5 × , NT 48, NT 65, NT 70, NT 72, NT 75, NT 80, WET VAC	66	6.904-285.0	5 3-ply, tear-resistant paper filter bags. BIA-(U, S, G, C) dust class M. For all NT 48/1, NT 65/2 Eco + Me and NT 72/2 Eco Tc models.	+ [
FILTER T/ NT				
Flat pleated filter HEPA, dust class H				
HEPA surface filter	67	6.904-364.0	HEPA surface filter – dust class H (H 14) – with glass-fibre layers increases filter capacity when vacuuming health-endangering and carcinogenic dust.	[
Special filter bags, wet filter bags				
Special filter bags, wet filter bags	68	6.904-252.0	Approved for dust class L, general cleaning, wet and dry, tear-resistant.	[
Plastic sacks for dust-free disposal				
Plastic bag for dust-free disposal, 10 × , NT 65, NT 70, NT 72, NT 75, NT 602, NT 700, NT 702	69	6.900-698.0	PE plastic sack.	[
Membrane filter / fabric filter				
Candle Filter - Wood, NT 65/2, NT 75/2	70	2.414-003.0		[
□ Available accessories				

 $^{\ \}square$ Available accessories.

KÄRCHER























				_
		Order no.	Description	
FILTER T/ NT				
Membrane filter / fabric filter				
Membrane filter, NT 65, NT 70, NT 72, NT 75, NT 551, NT 602, NT 700, NT 702, NT 802, NT 993	71	6.904-282.0	Polyester needle fleece membrane/fabric filter - BIA-C -, washable up to 40°C, metal fibres for earthing. Suitable for virtually all industrial two-motor NT vacuum cleaners.	
CONNECTING SLEEVES				
Y-adapter kit				
Y-adapter kit	72	2.637-217.0	Plastic distributor – suitable for NT vacuum cleaners.	
Connecting sleeve C-DN (clip on taper), EL (elect	troco	nductive)		
Connection cone NW35	73	5.407-005.0		
Connection cone NW40	74	5.407-006.0		
C-ID 35 adapter	75	5.407-112.0	Connects C 35 hose for ID 35, electrically conductive.	
C 40 adapter	76	5.407-109.0	Electrically conductive adapter (C 40) with DN 35 connection for connecting DN 35 accessories to an industrial C 40 or C-DN 40 suction hose. Suitable for NT vacuum cleaners.	
C-DN 40 adapter	77	5.407-111.0	Connects C 40 hose for ID 40, electrically conductive.	
Adapter for electric power tools, clip on, el.		·		
Sleeve for tool C35EL	78	5.453-042.0	3-way plastic adapter. For DN 26 to DN 36. For connecting power tools to an industrial C or C-DN 35 suction hose. Suitable for NT vacuum cleaners.	
Adapter for electric power tools, C 35, el.	79	5.453-048.0	Inner Ø 25.4 mm, outer Ø 34.6 mm/ 38 mm, el. Only NT-vacuums.	
	80	5.453-050.0	Inner Ø 27 mm, outer Ø 36.5 mm/ 38.8 mm, el. Only NT-vacuums.	
Adapter for electric power tools, screwable				
Power tool adapter, threaded, DN 35	81	5.453-016.0	3-way plastic adapter with fitting instructions. For DN 26 to DN 36. For connecting to an industrial DN 35 suction hose.	
Adapter for electric power tools, screwable, ID 35	82	5.453-026.0	Inner Ø 28.6 mm, outer Ø 37.3/38.8 mm.	
Power tool adapter, threaded, DN 35	83	6.902-059.0	Electrically conductive power tool adapter, threaded. Internal diameter: 32 mm.External diameter: 39 mm.	
	84	6.902-095.0	2-way power tool adapter, threaded. For connecting to an industrial DN 35 suction hose. Internal diameter: 28 mm.External diameter: 34 mm and 38.8 mmSuitable for NT vacuum cleaners.	

[☐] Available accessories.

























				Т
		Order no.	Description	_
CONNECTING SLEEVES				
Reducing sleeves	,			
Reducer	85	5.407-108.0	Threaded reducer - from C-40 to DN 35. Suitable for NT vacuum cleaners.	[
	86	6.902-017.0	Reducer for accessory extension. Ideal for accessories with DN 35 connecting cone in combination with accessories with DN 40 connecting cone.	
Sleeve C40 / C35	87	5.407-113.0	Reducer (C 40 to C 35) for connecting accessories with C-35 clip connection to suction hoses with 0 40 clip system.	= [
Reducer from ID 35 to 32	88	6.902-072.0	Reducer with internal connecting cone DN 32. Ideal for accessories from the industrial vacuum cleaner range in combination with industrial NT vacuum cleaners.	
Set reducing / extension sleeves	•			
Set reducing / extension sleeves	89	2.860-117.0	ID 40/35, ID 35/32 (tube -> nozzle), plastic.	
TARGET GROUP SPECIFIC VACUUM CLEANER	ACCESS	ORY SETS		
NT vacuum cleaner kit, DN 40, el.	90	2.638-147.0	Wet and dry vacuum cleaner kit, electrically conductive, DN 40.	
Car cleaning kit	91	2.862-166.0	Contains: - Car cleaning nozzle ID 35 - Upholstery/crevice tool ID 35 - Suction brush ID 35 - Connecting sleeve C 35/ ID 35	
OTHER ACCESSORIES FOR T AND NT				
CS 40 Me	92	2.863-026.0	The highly efficient CS 40 Me cyclone preseparator for all Kärcher wet and dry vacuum cleaners is a specially designed accessory for fine dust applications on construction sites or in industry.	
Adapter connection old elektr. leitend	93	5.031-436.0		[
UBS NON-CONDUCTIVE MEDIA				Ė
Add-on kit nonconducting media NT Tact²	94	2.642-602.0	For switching off when vacuuming non-conductive fluids such as oils and greases	
EMPTYING SUPPORTS				Ė
Shaving baskets				
Chip sieve	95	5.731-645.0	Plastic, perforates with internal thread. Protection of the drain hose from rough splinters, chips etc	:. [

[☐] Available accessories.