IVC 60/12-1 TACT EC

Compact industrial vacuum with automatic filter cleaning system and wear-free EC motor for non-stop use. Ideal for fine dusts in production areas – also suitable for stationary use.









Order no.


1.576-102.0

- Antistatic equipment
- Liquid cut-off
- Integrated cyclone for pre-separation system

| _ | | |
|-----------------------------|-------------|-------------------------|
| Technical data | | |
| EAN code | | 4039784463714 |
| Power supply | Ph / V / Hz | 1 / 220 - 240 / 50 - 60 |
| Air flow | l/s / m³/h | 62.5 / 225 |
| Vacuum | mbar / kPa | 244 / 24.4 |
| Container capacity | I | 60 |
| Container material | | Stainless steel |
| Rated input power | kW | 1.2 |
| Vacuuming type | | Electric |
| Connection nominal diameter | | DN 70 |
| Accessory nominal diameter | | DN 50 / DN 40 |
| Sound pressure level | dB(A) | 74 |
| Main filter dust class | | М |
| Filter area for main filter | m² | 0.95 |
| Weight without accessories | kg | 59 |
| Dimensions (L × W × H) | mm | 970 × 690 × 995 |

This machine requires instruction.

| Equipment | |
|---|---------------------|
| Main filter | Flat pleated filter |
| Accessories included in the scope of delivery | no |
| Automatic filling level shut-off | • |
| Container emptying | Set-down trolley |
| ■ Included in the scope of supply. | |

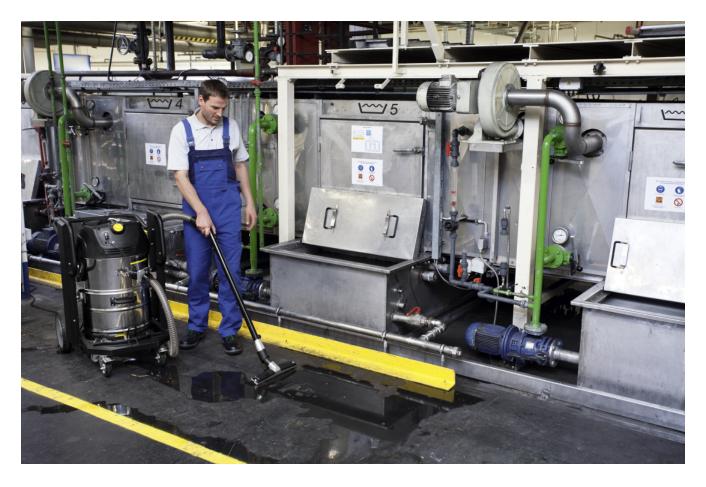



Low-wear EC turbine

- Brushless design for low-wear operation.
- Suitable for three-shift operation thanks to a minimum service life of 5000 hours.



Tact automatic filter cleaning system

- Automatic filter cleaning through targeted and powerful air blasts.
- Despite filter cleaning, the suction power remains constantly high.
- \blacksquare Long life of the filter reduces maintenance costs.



Equipped with compact flat pleated filter

- Clear compact design of the filter.
- Suitable for picking up free-flowing, dry dusts up to dust class M.

























| | | Order no. | Description | |
|---|------|-------------|--|-----|
| FLAT PLEATED FILTER, STANDARD, BIA C OR UP | TO D | UST CLASS M | | |
| Flat pleated filter, paper | | | | |
| Dry flat pleated filter, green label, suitable for NT 55/2 Tact², NT 65/2 Tact², NT 75/2 Tact² Me | 1 | 6.907-276.0 | Dry flat pleated filter made from cellulose fibre material with green label for vacuuming fine dust and coarse dirt of dust classes L and M for: NT 55/2 Tact², NT 65/2 Tact² and NT 75/2 Tact² Me. | |
| Flat pleated filter, PTFE | | | | |
| Flat pleated filter, PTFE | 2 | 6.907-449.0 | Polyester fleece with PTFE coating, dust class M, for $Tact^2$ vacuum cleaners. Particularly suitable for very adhesive materials. | r [|
| FILTER T/ NT | | | | |
| Fabric filter | | | | |
| Candle filter Wood, NT 65/2, NT 75/2 | 3 | 2.414-003.0 | Wood cartridge filter made from textile material with PTFE coating and a brown label. For safely vacuuming large quantities of wood and fibre dust with the NT 65/2 and 75/2 twin-motor Tact vacuums. | |
| ACCESORY SETS | | | | |
| Accessory kit for solids/dust | | | | |
| Oven cleaning accessory kit Expert DN 50 | 4 | 9.989-938.0 | Accessory kit for oven cleaning: ME hose 3 m (9.989-979.0), handle (9.989-899.0), suction tube (9.989-929.0), floor nozzle (9.989-935.0), reducer (9.989-712.0), adapter (9.993-011.0). | |
| Oven cleaning accessory kit Expert DN 40 | 5 | 9.989-939.0 | Accessory kit for oven cleaning: ME hose 3 m (9.989-976.0), handle (9.989-898.0), suction tube (9.989-928.0), floor nozzle (9.989-934.0), reducer (9.989-713.0), adapter (9.993-012.0). | |
| Food accessory kit Expert DN 40 | 6 | 9.989-940.0 | Food accessory kit DN 40: PU hose 3 m (9.989-970.0), handle (9.989-898.0), standard nozzle (9.989-838.0), brush (9.989-879.0), reducer (9.989-713.0), adapter (9.993-012.0). | |
| Food accessory kit Expert DN 50 | 7 | 9.989-941.0 | Food accessory kit: PU hose 3 m (9.989-973.0), handle (9.989-899.0), standard nozzle (9.989-844.0), brush (9.989-880.0), reducer (9.989-712.0), adapter (9.993-011.0). | |
| Accessory kit for overhead cleaning Expert DN 40 | 8 | 9.989-942.0 | Accessory kit DN 40 for overhead cleaning: suction tubes (9.989-920.0/9.993-008.0), handles (9.989-916.0/9.989-918.0), standard nozzle (9.989-838.0), brush (9.989-879.0), adapter (9.993-012.0). | |
| Accessory kit for overhead cleaning DN 50 Expert | 9 | 9.989-943.0 | Accessory kit DN 50 for overhead cleaning: suction tubes (9.989-921.0/9.993-009.0), handles (9.989-917.0/9.989-919.0), standard nozzle (9.989-844.0), brush (9.989-880.0), adapter (9.993-011.0). | |
| Professional dry floor cleaning set DN40 | 10 | 9.990-877.0 | Professional dry floor cleaning set: adapter (9.990-874.0), hose (2.889-141.0), bend (2.889-172.0), $2 \times$ suction tube (2.889-194.0), $3 \times$ nozzles (6.906-958.0, 6.903-033.0, 6.902-105.0). | |
| Advanced dry floor cleaning set DN40 | 11 | 9.990-893.0 | Advanced dry floor cleaning set: EVA hose (9.990-923.0), handle (9.990-929.0), 2 × suction tube (9.990-933.0), floor nozzle (9.990-935.0), standard nozzle (9.980-773.0). | |
| NOZZLES | | | | |
| Standard nozzles | | | | |
| Standard nozzle silicone FDA blue DN-F40 | 12 | 9.989-835.0 | | |
| Standard nozzle silicone FDA green DN-F40 | 13 | 9.989-836.0 | | |
| Standard nozzle silicone FDA red DN-F40 | 14 | 9.989-837.0 | | |

 \blacksquare Included in the scope of supply. \qed Available accessories.





















| | | Order no. | Description | |
|--|----|-------------|---|--|
| NOZZLES | | | | |
| Standard nozzles | | | | |
| Standard nozzle silicone FDA transparent DN-F40 | 15 | 9.989-838.0 | | |
| Standard nozzle silicone FDA white DN-F40 | 16 | 9.989-839.0 | | |
| Standard nozzle silicone FDA yellow DN-F40 | 17 | 9.989-840.0 | | |
| Standard nozzle silicone FDA blue DN-F50 | 18 | 9.989-841.0 | | |
| Standard nozzle silicone FDA green DN-F50 | 19 | 9.989-842.0 | | |
| Standard nozzle silicone FDA red DN-F50 | 20 | 9.989-843.0 | | |
| Standard nozzle silicone FDA transparent DN-F50 | 21 | 9.989-844.0 | | |
| Standard nozzle silicone FDA white DN-F50 | 22 | 9.989-845.0 | | |
| Standard nozzle silicone FDA yellow DN-F50 | 23 | 9.989-846.0 | | |
| Standard PVC nozzle DN40 | 24 | 9.989-674.0 | Electroconductive standard PVC nozzle. DN 40. | |
| Standard PVC nozzle DN50 | 25 | 9.989-673.0 | Electroconductive standard PVC nozzle. DN 50. | |
| Standard nozzle silicone DN40 | 26 | 9.988-401.0 | Stretchy standard nozzle made from silicone, inner cone DN 40. | |
| Standard nozzle silicone DN50 | 27 | 9.988-402.0 | | |
| Standard nozzle cuttable rubber DN40 | 28 | 9.989-677.0 | Standard nozzle, electroconductive, made from cuttable rubber. DN 40. | |

 $[\]blacksquare$ Included in the scope of supply. \qed Available accessories.



















| | | Order no. | Description | |
|---|----|-------------|---|--|
| NOZZLES | | | | |
| Standard nozzles | | | | |
| Standard nozzle cuttable rubber DN50 | 29 | 9.989-675.0 | Standard nozzle, electroconductive, made from cuttable rubber. DN 50. | |
| Standard aluminium nozzle DN40 | 30 | 9.980-748.0 | Diagonal nozzle made from anodised aluminium, electroconductive, DN 40. | |
| Standard aluminium nozzle DN50 | 31 | 9.980-749.0 | Diagonal nozzle made from anodised aluminium, electroconductive, DN 50. | |
| Flexible standard nozzles | | | | |
| Standard nozzle flexible PVC DN40 | 32 | 9.981-420.0 | Electroconductive, flexible round nozzle made from galvanised steel, with rubber mouthpiece DN 30. | |
| Standard nozzle flexible PVC DN50 | 33 | 9.981-421.0 | Electroconductive, flexible round nozzle made from galvanised steel, DN 50, with rubber mouthpiece DN 30. | |
| Standard nozzle, flexible, angled 90° PP DN40 | 34 | 9.981-429.0 | Flexible, electroconductive angled nozzle, DN 40, length: 800 mm. | |
| Floor nozzles | | • | | |
| Floor nozzle stainless steel AISI 304 DN-F40 blue | 35 | 9.989-861.0 | | |
| Floor nozzle stainless steel AISI 316L DN-F50 blue | 36 | 9.989-862.0 | | |
| Floor nozzle stainless steel AISI 316L DN-F40 green | 37 | 9.989-863.0 | | |
| Floor nozzle stainless steel AISI 316L DN-F50 green | 38 | 9.989-864.0 | | |
| Floor nozzle stainless steel AISI 316L DN-F40 red | 39 | 9.989-865.0 | | |
| Floor nozzle stainless steel AISI 316L DN-F50 red | 40 | 9.989-866.0 | | |
| Floor nozzle stainless steel AISI 316L DN-F40 transparent | 41 | 9.989-867.0 | | |
| Floor nozzle stainless steel AISI 316L DN-F50 transparent | 42 | 9.989-868.0 | | |

 $[\]blacksquare$ Included in the scope of supply. \square Available accessories.



















| | | Order no. | Description | |
|--|----|-------------|--|--|
| NOZZLES | | | | |
| Floor nozzles | | | | |
| Floor nozzle stainless steel AISI 316L DN-F40 white | 43 | 9.989-869.0 | | |
| Floor nozzle stainless steel AISI 316L DN-F50 white | 44 | 9.989-870.0 | | |
| Floor nozzle stainless steel AISI 316L DN-F40 yellow | 45 | 9.989-871.0 | | |
| Floor nozzle stainless steel AISI 316L DN-F50 yellow | 46 | 9.989-872.0 | | |
| Floor nozzle stainless steel AISI 316L DN-F40 | 47 | 9.989-914.0 | | |
| Floor nozzle stainless steel AISI 316L DN-F50 | 48 | 9.989-915.0 | | |
| Floor nozzle stainless steel 400 mm DN-F40 | 49 | 9.989-934.0 | | |
| Floor nozzle stainless steel 400 mm DN-F50 | 50 | 9.989-935.0 | | |
| Floor nozzle aluminium 400 mm DN-F40 | 51 | 9.989-936.0 | | |
| Floor nozzle aluminium 400 mm DN-F50 | 52 | 9.989-937.0 | | |
| Aluminium floor nozzle 370 mm DN40 | 53 | 9.989-683.0 | Floor nozzle, 370 mm, made from aluminium. DN 40. | |
| Aluminium floor nozzle, el, 370 mm, DN40 | 54 | 9.989-682.0 | Floor nozzle, 370 mm, made from aluminium. Electroconductive. DN 40. | |
| Aluminium floor nozzle, el, 370 mm, DN50 | 55 | 9.987-612.0 | Electroconductive multi-purpose floor nozzle. 370 mm wide, DN 50. | |
| Stainless steel floor nozzle el 370 mm DN40 | 56 | 9.989-558.0 | Multi-purpose floor nozzle (370 mm), electroconductive, DN 40. | |

[☐] Available accessories.

















| | | Order no. | Description | |
|--|----|-------------|---|---|
| NOZZLES | | | | |
| Floor nozzles | | | | |
| Floor nozzle rubber strip oil-resistant. 220 mm | 57 | 9.981-923.0 | Squeegee with plastic strip for floor nozzle, 220 mm wide. | |
| Floor nozzle rubber strip 370 mm | 58 | 9.981-914.0 | Squeegee with profiled strip for floor nozzle, 370 mm wide. | |
| Floor nozzle rubber strip 500 mm | 59 | 9.981-915.0 | Oil-resistant squeegee with profiled strip for floor nozzle, 500 mm wide. | |
| Floor nozzle brush strip el. 370 mm | 60 | 9.984-939.0 | Electroconductive squeegee for floor nozzle, 370 mm wide. | |
| Floor nozzle brush strip 500 mm | 61 | 9.980-764.0 | Brush strip set for floor nozzle 500 mm, with profiled strip. | |
| Crevice nozzles | | | | • |
| Crevice nozzle PP 15 mm × 145 mm DN40 | 62 | 9.988-116.0 | Electroconductive, flat multi-purpose crevice nozzle made from plastic, DN 42. | |
| Crevice nozzle PP 15 mm × 145 mm DN50 | 63 | 9.988-117.0 | Electroconductive, flat multi-purpose crevice nozzle made from plastic, DN 52. | |
| Crevice nozzle PU 19 mm × 160 mm DN40 | 64 | 9.981-483.0 | Crevice nozzle made from PU, DN 40. | |
| Crevice nozzle PU 22 mm × 175 mm DN50 | 65 | 9.981-482.0 | Crevice nozzle made from PU, DN 50. | |
| Crevice nozzle 17 mm × 120 mm DN40 | 66 | 9.989-680.0 | Electroconductive crevice nozzle, 17 × 120 mm. DN 40. | |
| Crevice nozzle 25 mm × 120 mm DN40 | 67 | 9.989-678.0 | Electroconductive crevice nozzle, 25 × 120 mm. DN 40. | |
| Crevice nozzle 18 mm × 120 mm DN50 | 68 | 9.981-442.0 | Electroconductive crevice nozzle made from sheet steel, DN 50, with 17 mm slot width. | |
| Crevice nozzle 25 mm × 120 mm DN50 | 69 | 9.981-465.0 | Electroconductive crevice nozzle made from sheet steel, DN 50, with 25 mm slot width. | |
| Stainless steel crevice nozzle 17 mm × 120 mm DN40 | 70 | 9.989-193.0 | Crevice nozzle made from stainless steel, DN 50. | |

 $^{\ \}square$ Available accessories.



















| | | | | $\overline{}$ |
|---|----|-------------|--|---------------|
| | | | | |
| | | Order no. | Description | |
| NOZZLES | | | | |
| Flexible crevice nozzles | | | | |
| Crevice nozzle flexible silicone FDA DN-F50 transparent | 71 | 9.989-847.0 | | |
| Crevice nozzle flexible silicone FDA DN-F40 transparent | 72 | 9.989-848.0 | | |
| Flexible crevice nozzle silicone 65 mm DN50 | 73 | 9.988-403.0 | Flexible crevice nozzle made from silicone, DN 50. | |
| Flexible crevice nozzle 20 mm × 45 mm DN40 | 74 | 9.981-423.0 | Flexible and electroconductive crevice nozzle made from galvanised steel with 20 mm slot width, DN 40. | |
| Flexible crevice nozzle 12 mm × 45 mm DN50 | 75 | 9.981-424.0 | Flexible, electroconductive galvanised crevice nozzle, DN 50, with 13 mm slot width. | |
| Flexible crevice nozzle 20 mm × 45 mm DN50 | 76 | 9.981-425.0 | Flexible and electroconductive crevice nozzle made from galvanised steel with 20 mm slot width, DN 50. | |
| Surface nozzles | | | | |
| Silicone surface nozzle FDA blue DN-F40 | 77 | 9.989-849.0 | | |
| Silicone surface nozzle FDA blue DN-F50 | 78 | 9.989-850.0 | | |
| Silicone surface nozzle FDA green DN-F40 | 79 | 9.989-851.0 | | |
| Silicone surface nozzle FDA green DN-F50 | 80 | 9.989-852.0 | | |
| Silicone surface nozzle FDA red DN-F40 | 81 | 9.989-853.0 | | |
| Silicone surface nozzle FDA red DN-F50 | 82 | 9.989-854.0 | | |
| Silicone surface nozzle FDA transparent DN-F40 | 83 | 9.989-855.0 | | |
| Silicone surface nozzle FDA transparent DN-F50 | 84 | 9.989-856.0 | | |

 $[\]hfill \square$ Available accessories.























| | | Order no. | Description | |
|--|----|-------------|--|--|
| NOZZLES | | | | |
| Surface nozzles | | | | |
| Silicone surface nozzle FDA white DN-F40 | 85 | 9.989-857.0 | | |
| Silicone surface nozzle FDA white DN-F50 | 86 | 9.989-858.0 | | |
| Silicone surface nozzle FDA yellow DN-F40 | 87 | 9.989-859.0 | | |
| Silicone surface nozzle FDA yellow DN-F50 | 88 | 9.989-860.0 | | |
| Silicone surface nozzle 120 mm DN40 | 89 | 9.988-118.0 | Electroconductive rubber nozzle, angled, DN 40, suitable for use with foods. | |
| Silicone surface nozzle 120 mm DN50 | 90 | 9.988-119.0 | Electroconductive rubber nozzle, angled, DN 50, suitable for use with foods. | |
| Aluminium surface nozzle, 150 mm, DN 40 | 91 | 9.989-666.0 | Surface nozzle, 150 mm, made from aluminium. DN 40. | |
| Aluminium surface nozzle 150 mm DN50 | 92 | 9.989-665.0 | Surface nozzle, 150 mm, made from aluminium. DN 50. | |
| Borehole nozzles | • | | | |
| Blind hole nozzle DN40 | 93 | 9.989-671.0 | 90° curved blind hole nozzle with 60 mm diameter. | |
| Blind hose nozzle angled 60° DN40 | 94 | 9.989-669.0 | 90° curved blind hole nozzle with 48 mm diameter. DN 40. | |
| Blind hose nozzle angled 90° DN40 | 95 | 9.989-667.0 | 90° curved blind hole nozzle with 60 mm diameter. DN 40. | |
| Blind hose nozzle angled 90° 200 mm extension DN40 | 96 | 9.989-670.0 | 90° curved blind hole nozzle with 48 mm diameter. DN 40. | |
| BRUSHES | · | | | |
| Standard brushes | | | | |
| Standard brush 40 mm DN40 | 97 | 9.981-431.0 | Flat brush nozzle DN 40. | |
| Standard brush 40 mm DN50 | 98 | 9.981-432.0 | Flat brush nozzle DN 50. | |

 $[\]hfill \square$ Available accessories.

















| | | Order no. | Description | |
|---------------------------------|-----|-------------|---|--|
| BRUSHES | | | | |
| End brushes | | | | |
| Brush FDA blue ø 75 mm DN-F40 | 99 | 9.989-873.0 | | |
| Brush FDA blue ø 75 mm DN-F50 | 100 | 9.989-874.0 | | |
| Brush FDA green ø 75 mm DN-F40 | 101 | 9.989-875.0 | | |
| Brush FDA green ø 75 mm DN-F50 | 102 | 9.989-876.0 | | |
| Brush FDA red ø 75 mm DN-F40 | 103 | 9.989-877.0 | | |
| Brush FDA red ø 75 mm DN-F50 | 104 | 9.989-878.0 | | |
| Brush FDA white ø 75 mm DN-F40 | 105 | 9.989-879.0 | | |
| Brush FDA white ø 75 mm DN-F50 | 106 | 9.989-880.0 | | |
| Brush FDA yellow ø 75 mm DN-F40 | 107 | 9.989-881.0 | | |
| Brush FDA yellow ø 75 mm DN-F50 | 108 | 9.989-882.0 | | |
| End brush Ø 82 mm DN40 | 109 | 9.989-609.0 | Electroconductive end brush with 82 mm diameter. DN 40. | |
| End brush Ø 82 mm DN50 | 110 | 9.989-608.0 | Electroconductive end brush with 82 mm diameter. DN 50. | |
| Surface brushes | , | ! | · | |
| Surface brush PP 24 mm DN40 | 111 | 9.989-610.0 | Electroconductive surface brush. DN 40. | |
| Surface brush 300 mm DN40 | 112 | 9.981-911.0 | Vacuum brush, 300 mm, with 45° connection, with star screw, horsehair bristles. | |

[☐] Available accessories.











| | _ | | | |
|--------------------------------------|-----|-------------|---|--|
| | | | | |
| | | Order no. | Description | |
| BRUSHES | | | | |
| Surface brushes | | | | |
| Surface brush 300 mm DN50 | 113 | 9.981-912.0 | Vacuum brush, 300 mm, with 45° connection, with star screw, horsehair bristles. | |
| Cylinder brushes | | • | | |
| Cylinder brush ø 100 mm DN-F40 | 114 | 9.989-922.0 | | |
| Cylinder brush ø 200 mm DN-F40 | 115 | 9.989-923.0 | | |
| Cylinder brush ø 100 mm DN-F50 | 116 | 9.989-925.0 | | |
| Cylinder brush ø 200 mm DN-F50 | 117 | 9.989-926.0 | | |
| HOSES | | | | |
| ME-Schläuche | | | | |
| Hose ME DN40 3 m | 118 | 9.989-976.0 | | |
| Hose ME DN40 5 m | 119 | 9.989-977.0 | | |
| Hose without connection ME DN40 15 m | 120 | 9.989-978.0 | | |
| Hose ME DN50 3 m | 121 | 9.989-979.0 | | |
| Hose ME DN50 5 m | 122 | 9.989-980.0 | | |
| PVC | | | | |
| Hose PVC DN40 3 m | 123 | 9.989-962.0 | | |
| Hose PVC DN40 5 m | 124 | 9.989-963.0 | | |
| Hose PVC DN50 3 m | 125 | 9.989-964.0 | | |
| Hose PVC DN50 5 m | 126 | 9.989-965.0 | | |

[☐] Available accessories.





















| | 1 | | | \top |
|---|----------|-------------|--|--------|
| | | | | |
| | | Order no. | Description | |
| HOSES | | | | |
| PVC | | | | |
| Hose PVC DN40 3 m | 127 | 9.989-647.0 | PVC hose, DN 40. Temperature-resistant up to 85 °C and electrically conductive. Length: 3 m. | |
| Hose PVC DN40 5 m | 128 | 9.989-614.0 | Electroconductive PVC hose, DN 40. Temperature-resistant up to 85 °C. Length: 5 m. | |
| PVC hose DN40 15 m without connectors | 129 | 9.989-633.0 | PVC hose without tap adapter, DN 40. Electroconductive and temperature-resistant up to 85 °C. Length: 15 m. | |
| EVA hoses | | | | |
| Hose EVA DN40 3 m | 130 | 9.989-982.0 | | |
| Hose EVA DN40 5 m | 131 | 9.989-983.0 | | |
| Hose EVA DN50 3 m | 132 | 9.989-984.0 | | |
| Hose EVA DN50 5 m | 133 | 9.989-985.0 | | |
| Hose EVA NW40 3 m | 134 | 9.988-088.0 | Electroconductive hose with NW 40. Suitable for temperatures up to 65°C. Length: 3 m. | |
| Hose EVA NW40 5 m | 135 | 9.988-089.0 | Five-metre-long, electroconductive hose with NW 40. Suitable for temperatures up to 65° C. Length: 5 m. | : 🗆 |
| EVA hose DN40 15 m without connectors | 136 | 9.989-630.0 | EVA hose without tap adapter, DN 40. Electroconductive and temperature-resistant up to 65 °C. Length: 15 m. | |
| Hose installation sets | <u> </u> | | | |
| Hose installation kit DN40 | 137 | 9.989-627.0 | Multipiece hose connection set, DN 40. | |
| Hose connection kit, stainless steel AISI 304 DN40 | 138 | 9.989-986.0 | Hose connection kit in nominal width DN 40, made of stainless steel. Contents: 1 hose connection piece, 1 hose connection (rotating), 2 hose clamps, 2 hose end pieces (black), 1 flat bag (PE plastic). | |
| Hose connection kit, stainless steel AISI 304 DN50 | 139 | 9.989-987.0 | Hose connection kit in nominal width DN 50, made of stainless steel. Contents: 1 hose connection piece, 1 hose connection (rotating), 2 hose clamps, 2 hose end pieces (black), 1 flat bag (PE plastic). | |
| PU hoses | | | | |
| Hose PU DN40 3 m | 140 | 9.989-966.0 | | |
| | | 1 | | |

 $[\]hfill \square$ Available accessories.















| | | Order no. | Description | |
|--------------------------------------|-----|-------------|--|--|
| HOSES | | | | |
| PU hoses | | | | |
| Hose PU DN40 5 m | 141 | 9.989-967.0 | | |
| Hose PU DN50 3 m | 142 | 9.989-968.0 | | |
| Hose PU DN50 5 m | 143 | 9.989-969.0 | | |
| Hose PU FDA DN40 3 m | 144 | 9.989-970.0 | | |
| Hose PU FDA DN40 5 m | 145 | 9.989-971.0 | | |
| Hose PU FDA DN40 15 m | 146 | 9.989-972.0 | | |
| Hose PU FDA DN50 3 m | 147 | 9.989-973.0 | | |
| Hose PU FDA DN50 5 m | 148 | 9.989-974.0 | | |
| Hose PU FDA DN50 15 m | 149 | 9.989-975.0 | | |
| Hose PU DN40 3 m | 150 | 9.989-617.0 | Oil-resistant, electroconductive PU hose, DN 40. Suitable for abrasive suction media and temperature-resistant up to 80 °C. Length: 3 m. | |
| Hose PU DN40 5 m | 151 | 9.989-618.0 | Oil-resistant, electroconductive PU hose, DN 40. Suitable for abrasive suction media and temperature-resistant up to 80 °C. Length: 5 m. | |
| PU hose DN40 15 m without connectors | 152 | 9.989-637.0 | PU hose without tap adapter, DN 40. Electroconductive and temperature-resistant up to 80 °C. Length: 15 m. | |
| ME-PU-hoses | | 1 | | |
| Hose without connection ME DN50 15 m | 153 | 9.989-981.0 | | |
| Hose ME-PU DN40 3 m | 154 | 9.989-621.0 | Electroconductive, oil-resistant ME-PU hose, DN 40. Suitable for abrasive suction media and temperature-resistant up to 110 $^{\circ}$ C. Length: 3 m. | |

 $[\]hfill \square$ Available accessories.





















| | | Order no. | Description | |
|---|-----|-------------|---|--|
| HOSES | | | | |
| ME-PU-hoses | | | | |
| ME-PU hose, DN 40, 5 m | 155 | 9.989-622.0 | Electroconductive, oil-resistant ME-PU hose, DN 40. Suitable for abrasive suction media and temperature-resistant up to 110 °C. Length: 5 m. | |
| ME-PU hose DN40 15 m without connectors | 156 | 9.989-640.0 | Electroconductive, oil-resistant ME-PU hose without tap adapter, DN 40. Suitable for abrasive suction media and temperature-resistant up to 110 °C. Length: 15 m. | |
| HANDLES | | | | |
| Elbow aluminium 45° DN40 | 157 | 9.989-544.0 | 45° curved handle made from aluminium, DN 40. | |
| Elbow aluminium 45° DN50 | 158 | 9.989-547.0 | Handle with 45° bend. Made from aluminium, DN 50. | |
| Handle stainless steel AISI 304 DN40 | 159 | 9.989-896.0 | | |
| Handle stainless steel AISI 304 DN50 | 160 | 9.989-897.0 | | |
| Handle straight stainless steel AISI 304 DN40 | 161 | 9.989-898.0 | | |
| Handle straight stainless steel AISI 304 DN50 | 162 | 9.989-899.0 | | |
| Handle carbon 45° DN-F40 | 163 | 9.989-916.0 | | |
| Handle carbon 45° DN-F50 | 164 | 9.989-917.0 | | |
| Handle carbon 110° DN-F40 | 165 | 9.989-918.0 | | |
| Handle carbon 110° DN-F50 | 166 | 9.989-919.0 | | |
| Handle DN 40 | 167 | 9.977-679.0 | 45° curved and electroconductive handle made from stainless steel. Inner cone DN 40. | |
| Stainless steel handle NW40 | 168 | 9.989-036.0 | Curved and electroconductive handle made from stainless steel. Angle 45°, inner cone NW 40. | |

[☐] Available accessories.















| | | Order no. | Description | |
|--|-----|-------------|--|--|
| SUCTION TUBES | | | | |
| Carbon suction tube 1500 mm DN40 | 169 | 9.989-552.0 | Very light carbon extension tube, electroconductive, DN 40. Length: 1500 mm. | |
| Carbon suction tube 1500 mm DN50 | 170 | 9.989-553.0 | Electroconductive, very light carbon extension tube. Inner cone DN 50, 1500 mm long. | |
| Suction tube stainless steel AISI 304 DN40 | 171 | 9.989-912.0 | | |
| Suction tube stainless steel AISI 304 DN50 | 172 | 9.989-913.0 | | |
| Suction tube carbon 1500 mm DN-F40 conical | 173 | 9.989-920.0 | | |
| Suction tube carbon 1500 mm DN-F50 conical | 174 | 9.989-921.0 | | |
| Suction tube aluminium high temperature 1000 mm DN-F40 | 175 | 9.989-928.0 | | |
| Suction tube aluminium high temperature 1000 mm DN-F50 | 176 | 9.989-929.0 | | |
| Suction tube aluminium high temperature 2000 mm DN-F40 | 177 | 9.989-930.0 | | |
| Suction tube aluminium high temperature 2000 mm DN-F50 | 178 | 9.989-931.0 | | |
| Suction tube aluminium high temperature 3000 mm DN-F40 | 179 | 9.989-932.0 | | |
| Suction tube aluminium high temperature 3000 mm DN-F50 | 180 | 9.989-933.0 | | |
| Suction tube 850 mm DN 40 | 181 | 9.977-525.0 | Steel extension tube, electroconductive, DN 40. Length: 850 mm. | |
| Stainless steel suction tube 850 mm NW40 | 182 | 9.989-039.0 | Stainless steel extension tube, electroconductive, NW 40. Length: 850 mm. | |

 $[\]hfill \square$ Available accessories.























| | | Order no. | Description | |
|--|-----|-------------|---|--|
| SUCTION TUBES | 1 | 1 | | |
| Stainless steel suction tube 850 mm NW50 | 183 | 9.988-114.0 | Electroconductive extension tube made from stainless steel. Inner cone NW 50. | |
| OTHER ACCESSORIES | | | | |
| Universal accessories holder | 184 | 9.989-789.0 | Universal accessories holder for simple storage of suction tubes directly on industrial vacuums from the IVC, IVM and IVS product lines from Kärcher. | |
| ADAPTERS / REDUCERS / DISTRIBUTORS | | | | |
| Accessories adapter | | | | |
| Adapter DN70 auf Bajonett 2.0 elektr. leitend | 185 | 9.990-874.0 | | |
| Adapter accessories DN 50 to DN 51 | 186 | 9.989-603.0 | Steel adapter for connection of DN 50 to DN 51. Electroconductive. | |
| Adapter accessories DN 51 to DN 50 | 187 | 9.989-601.0 | Steel adapter for connection of DN 51 to DN 50. Electroconductive. | |
| Adapter accessories DN50 to DN61 | 188 | 9.989-602.0 | Steel adapter for connection of DN 50 to DN 61. Electroconductive. | |
| Adapter accessories DN 61 to DN 50 | 189 | 9.989-604.0 | Steel adapter for connection of DN 61 to DN 50. Electroconductive. | |
| Reducers/expanders | | <u> </u> | | |
| Reducer in AISI 304 stainless steel DN50 to DN40 | 190 | 9.989-893.0 | | |
| Reducer DN 70 to DN 50 | 191 | 9.977-772.0 | | |
| Reduction DN70 to DN40 | 192 | 9.989-690.0 | Electroconductive steel reducer for reduction from DN 70 to DN 40. | |
| Reduction DN50 to DN40 | 193 | 9.981-231.0 | Reducer from DN 50 to DN 40. Material: Steel. Electroconductive. | |
| Stainless steel reducer DN 70 to DN 50 | 194 | 9.989-712.0 | | |
| Stainless steel reducer DN 70 to DN 40 | 195 | 9.989-713.0 | | |
| Expander | | | | |
| Expansion DN40 to DN50 | 196 | 9.981-936.0 | Reducer from external cone DN 40 to internal cone DN 50. Material: Steel. Electroconductive. | |

[☐] Available accessories.











| | | Order no. | Description | | |
|--|------------------------------------|-------------|--|--|--|
| ADAPTERS / REDUCERS / DISTRIBUTORS | ADAPTERS / REDUCERS / DISTRIBUTORS | | | | |
| Expander | | | | | |
| Expansion DN50 to DN70 | 197 | 9.981-921.0 | Reducer from external cone DN 50 to internal cone DN 70. Material: Steel. Electroconductive. | | |
| Distributor | | | | | |
| AISI 304 stainless steel manifold DN70 to DN50 | 198 | 9.989-894.0 | | | |
| AISI 304 stainless steel manifold DN70 to DN40 | 199 | 9.989-895.0 | | | |
| Y distributor DN 70 to DN 50 | 200 | 9.989-611.0 | Electroconductive steel fitting, DN 70/DN 50 / DN 50. | | |
| PRE-SEPARATORS | | | | | |
| Pre-separator | | | | | |
| Pre-separator Tc Op liquids 125 DN70 | 201 | 9.989-686.0 | 125 litre pre-separator, DN 70. | | |

[☐] Available accessories.