

NT 40/1 TACT TE H

With a guaranteed filtration efficiency of 99.995%, the 40/1 Tact Te H wet and dry vacuum cleaner is the first choice for removing dusts hazardous to health in dust class H.



Order No.

1.148-348.0

- Complete antistatic system, incl. conductive accessories
- Socket with automatic start-up for electric tools
- Licensed for asbestos abatement

Technical data

EAN code		4054278740584
Type of current	Phases / Volt / Hertz	1 / 220 - 240 / 50 - 60
Air flow	Litres per second	74
Vacuum	Millibar / Kilopascal	273 / 27.3
Container capacity	Litre	40
Rated input power	Watt	Maximum 1380
Standard nominal width		DN 35
Cable length	Metre	7.5
Sound pressure level	Decibel	69
Weight without accessories	Kilogram	15.1
Weight incl. packaging	Kilogram	19.8
Dimensions (L × W × H)	Millimetre	560 × 370 × 655

Equipment

Safety filter bag	Unit	1
Suction hose	Metre	4 / electrically conductive
Bend		electrically conductive
Suction Tube	Unit × Millimetre	2 × 550 / Stainless steel
Filter bag		Fleece
Wet and dry floor tool	Millimetre	360
Crevice nozzle		■
Connector for electric tools		■
Power tool autostart		■
Fully antistatic		■
Flat pleated filter		PTFE HEPA
Sturdy bumper		■
Protection class		I
Castor with brake		■
Filter cleaning		Tact - Auto Filter Clean System
PE-Plastic bag for dust-free disposal	Unit	1

■ included in delivery.




Filtration system with H filter and Tact filter cleaning system

- Sucks less dangerous dust directly into the container. Filtration efficiency: 99.995 per cent.
- The greatest possible health protection without sacrificing suction power or filter endurance.



Fulfills testing requirements for dust class H, with additional test for "Asbestos" in accordance with TRGS 519

- In Germany, only safety vacuum cleaners with this licence are allowed to be used to vacuum dust that contains asbestos.

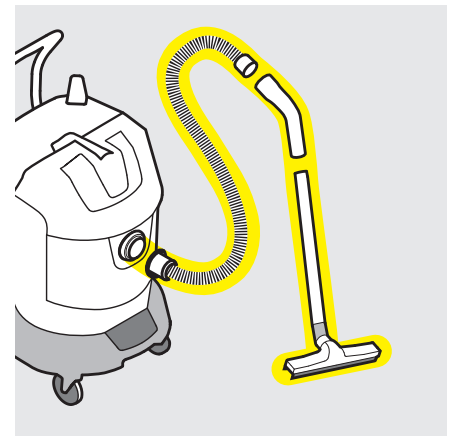

Complete antistatic system with conductive accessories

- Users are effectively protected against electric shocks and electrostatic charging.

EQUIPMENT FOR NT 40/1 TACT TE H

1.148-348.0



		Order No.	Description	
BENDS				
Plastic bend				
Elbow complete packaged NW35 2K	1	2.889-168.0	Electrically conductive, ergonomic plastic bend in size DN 35 for wet and dry vacuum cleaners. Equipped with a clip 2.0 connection at the hose end and a cone connection at the accessory end.	■
Elbow electrically conducting packaged N	2	2.889-148.0	Antistatic, ergonomic bends with air-flow regulator in size DN 35 for dry vacuum cleaners. Equipped with a clip 2.0 connection at the hose end and a cone connection at the accessory end.	□
Elbow packaged NW35 2K	3	2.889-170.0	Ergonomic DN 35 plastic bend for wet and dry vacuum cleaners. Equipped with a clip 2.0 connection at the hose end and a cone connection at the accessory end.	□
SUCTION NOZZLES				
All-purpose nozzles (wet/dry)				
Floor tool packaged NW35 360mm	4	2.889-152.0	360 mm wide wet and dry floor nozzle with easy-to-change inserts. Including brush strips and squeegees.	■
Floor tool anthracite packaged NW35	5	2.889-173.0	300 millimetre width, anthracite coloured wet/dry floor nozzle, NW 35. With easy-to-change inserts. Incl. brush strips and squeegees.	□
Crevice nozzles				
Crevice nozzle wet and dry packaged NW35	6	2.889-159.0	Crevice nozzle with nominal width DN 35 for Kärcher dry vacuum cleaners and wet and dry vacuum cleaners. Length 225 mm.	■
SUCTION TUBES				
Suction tubes stainless steel				
Suction tube, 2 x, NT, DN 35, 550 mm long, stainless steel, suitable for: NT 27/1, NT 30/1 Tact, NT 40/1 Ap, NT 48/1, NT 50/1 Tact	7	2.889-192.0	The suction tube set consists of 2 suction tubes made of high-quality stainless steel (DN 35 and 550 mm long each). For Kärcher wet and dry vacuum cleaners.	■
SUCTION HOSES				
Suction hoses with clip system 2.0 (compatible with vacuum cleaners from model year 2017 on)				
Hose electrically conducting packaged NW	8	2.889-137.0	The electrically conductive suction hose in nominal width DN 35 and with 4 m length is suitable for use with wet and dry vacuum cleaners from Kärcher.	■
Hose packaged NW35 2.5m	9	2.889-134.0	The suction hose in nominal width DN 35 and with 2.5 m length is suitable for use with wet and dry vacuum cleaners from Kärcher.	□
Hose packaged NW35 4.0m	10	2.889-135.0	The suction hose in nominal width DN 35 and with 4 m length is suitable for use with wet and dry vacuum cleaners from Kärcher.	□
Hose electrically conducting packaged NW	11	2.889-136.0	The electrically conductive suction hose in nominal width DN 35 and with 2.5 m length is suitable for use with wet and dry vacuum cleaners.	□
CONNECTING SLEEVES				
Adapter for electric power tools, clip on, el.				
Sleeve electrically conducting packaged	12	2.889-151.0	Tool adaptor with a rubber fixture and airflow control slide for the new clip system. Suitable for all current electric tools.	■
FILTER T/ NT				
Flat pleated filter HEPA, dust class H				
Flat-pleated filter packaged PTFE H	13	6.907-671.0	Safety/HEPA flat pleated filter made from PES/PTFE fibre material with a red label. Certified for dust class H. For vacuuming hazardous dusts, coarse dirt and liquids.	□
HEPA flat pleated filter	14	6.904-242.0	HEPA-14 (H14) flat pleated filter for Kärcher wet and dry vacuum cleaners. Suitable for vacuuming hazardous dusts, coarse dirt and liquids.	□

■ Included in delivery. □ Available accessories.

EQUIPMENT FOR NT 40/1 TACT TE H 1.148-348.0



	Order No.	Description	
FILTER T/ NT			
Safety filter sets / sacks			
Safety filter bag, 5 Unit, NT 30/1	15	2.889-183.0	<input type="checkbox"/>

■ Included in delivery. Available accessories.